



锐捷®





-
-
-



1

1




锐捷网络




2/3





1



-
-
-
-



-
-
-
-
-
-



-
-
-
-



CONFIDENTIAL



Q

d

~

-
-
-
-






1

†

~


•

•

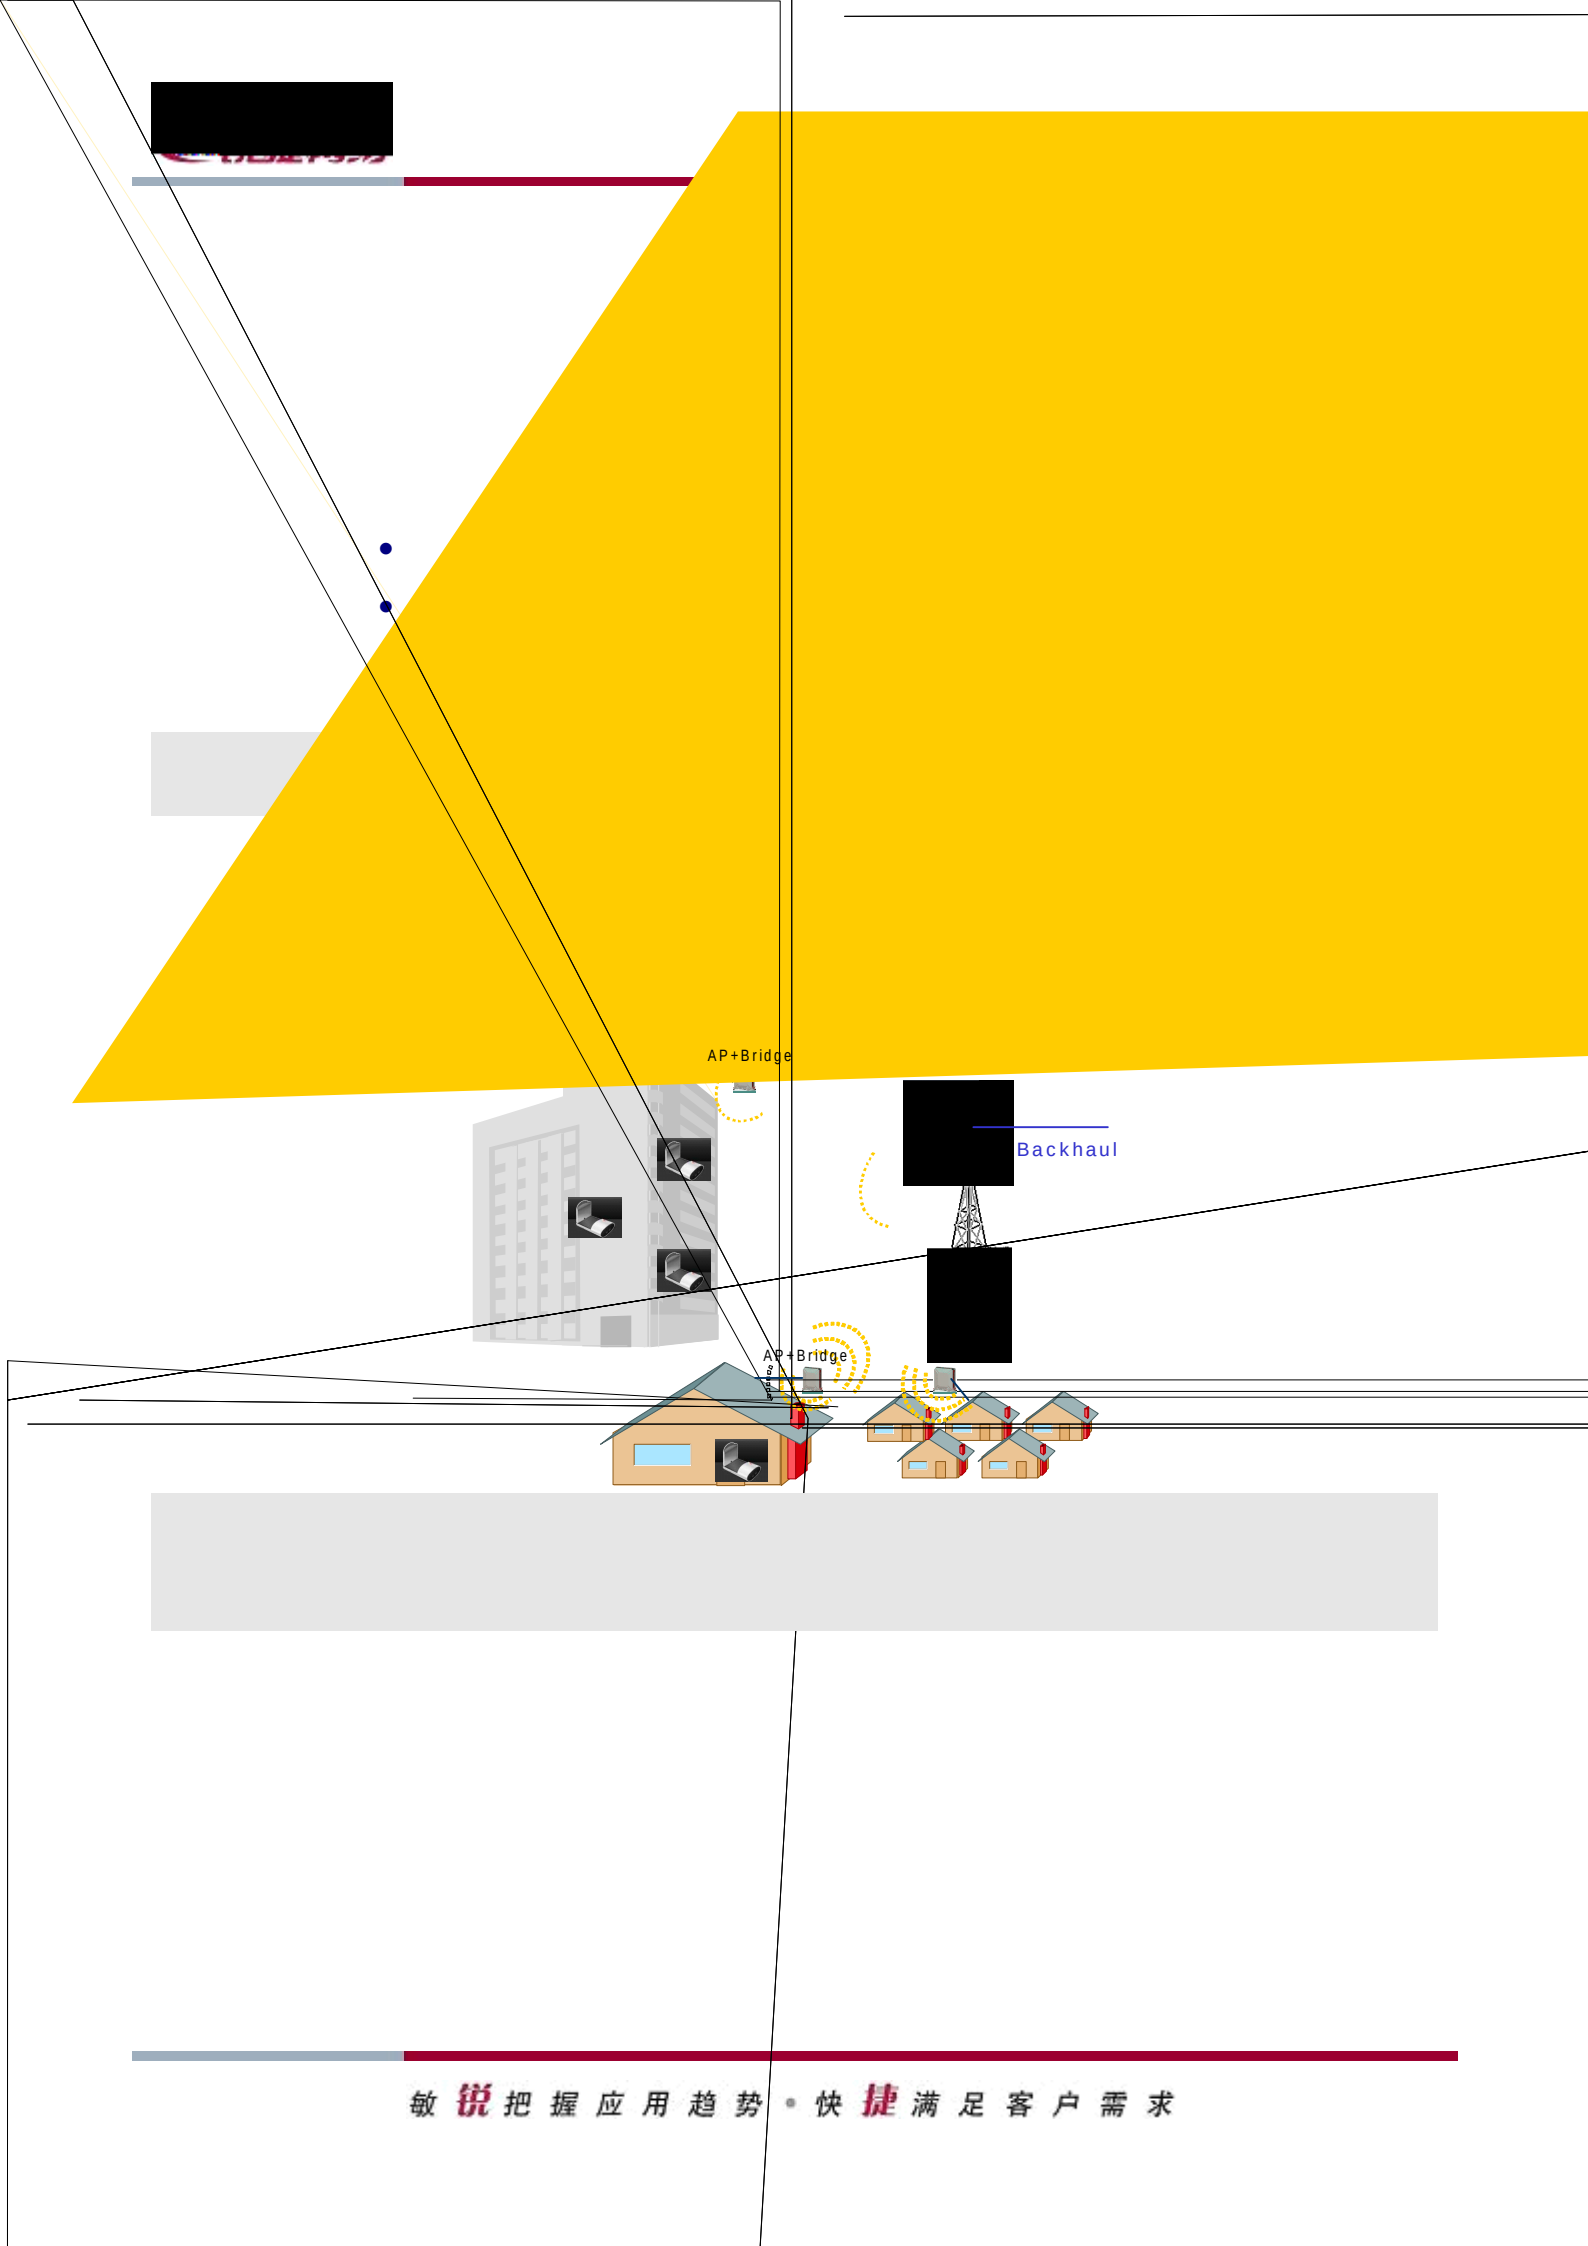




↑

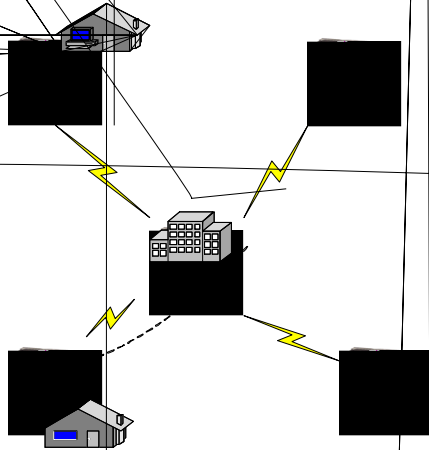



0123456789



-
-
-
-
-
-
-

-
-
-
-
-



h "O "Q I ' h 1 t



~ ↓

" . ↓ " .



01021972



-
-
- **Reset**



Reset

1


Reset

é

-




-
- LAN
- Reset

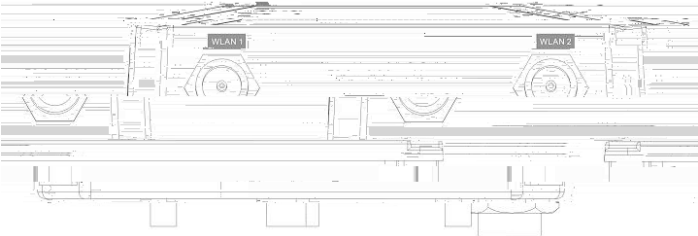


--	--	--



锐捷网络



h





“ ”

”

—



—

—

LAN-IN

PWR-LAN OUT





√


"l

admin

ã

admin01



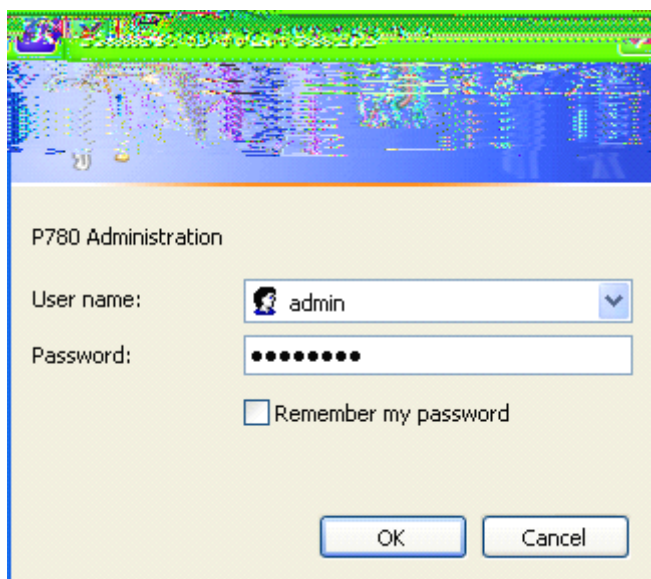

P780 Administration

User name:

Password:

☐ Remember my password

OK Cancel





P-780 EXIT

Status	Network	Wireless	System
--------	---------	----------	--------



e



[illegible]



			
Frequency range		2400 MHz - 2483 MHz	5150 MHz - 5875 MHz
Peak gain		4.5 dBi	7.0 dBi
Average gain		2.5 dBi	5.0 dBi
VSWR		2.0 : 1 Max.	
Polarization		Linear, vertical	
Power handling		2 W (cw)	
Impedance		50 Ohms	
Connector		RP-	

