


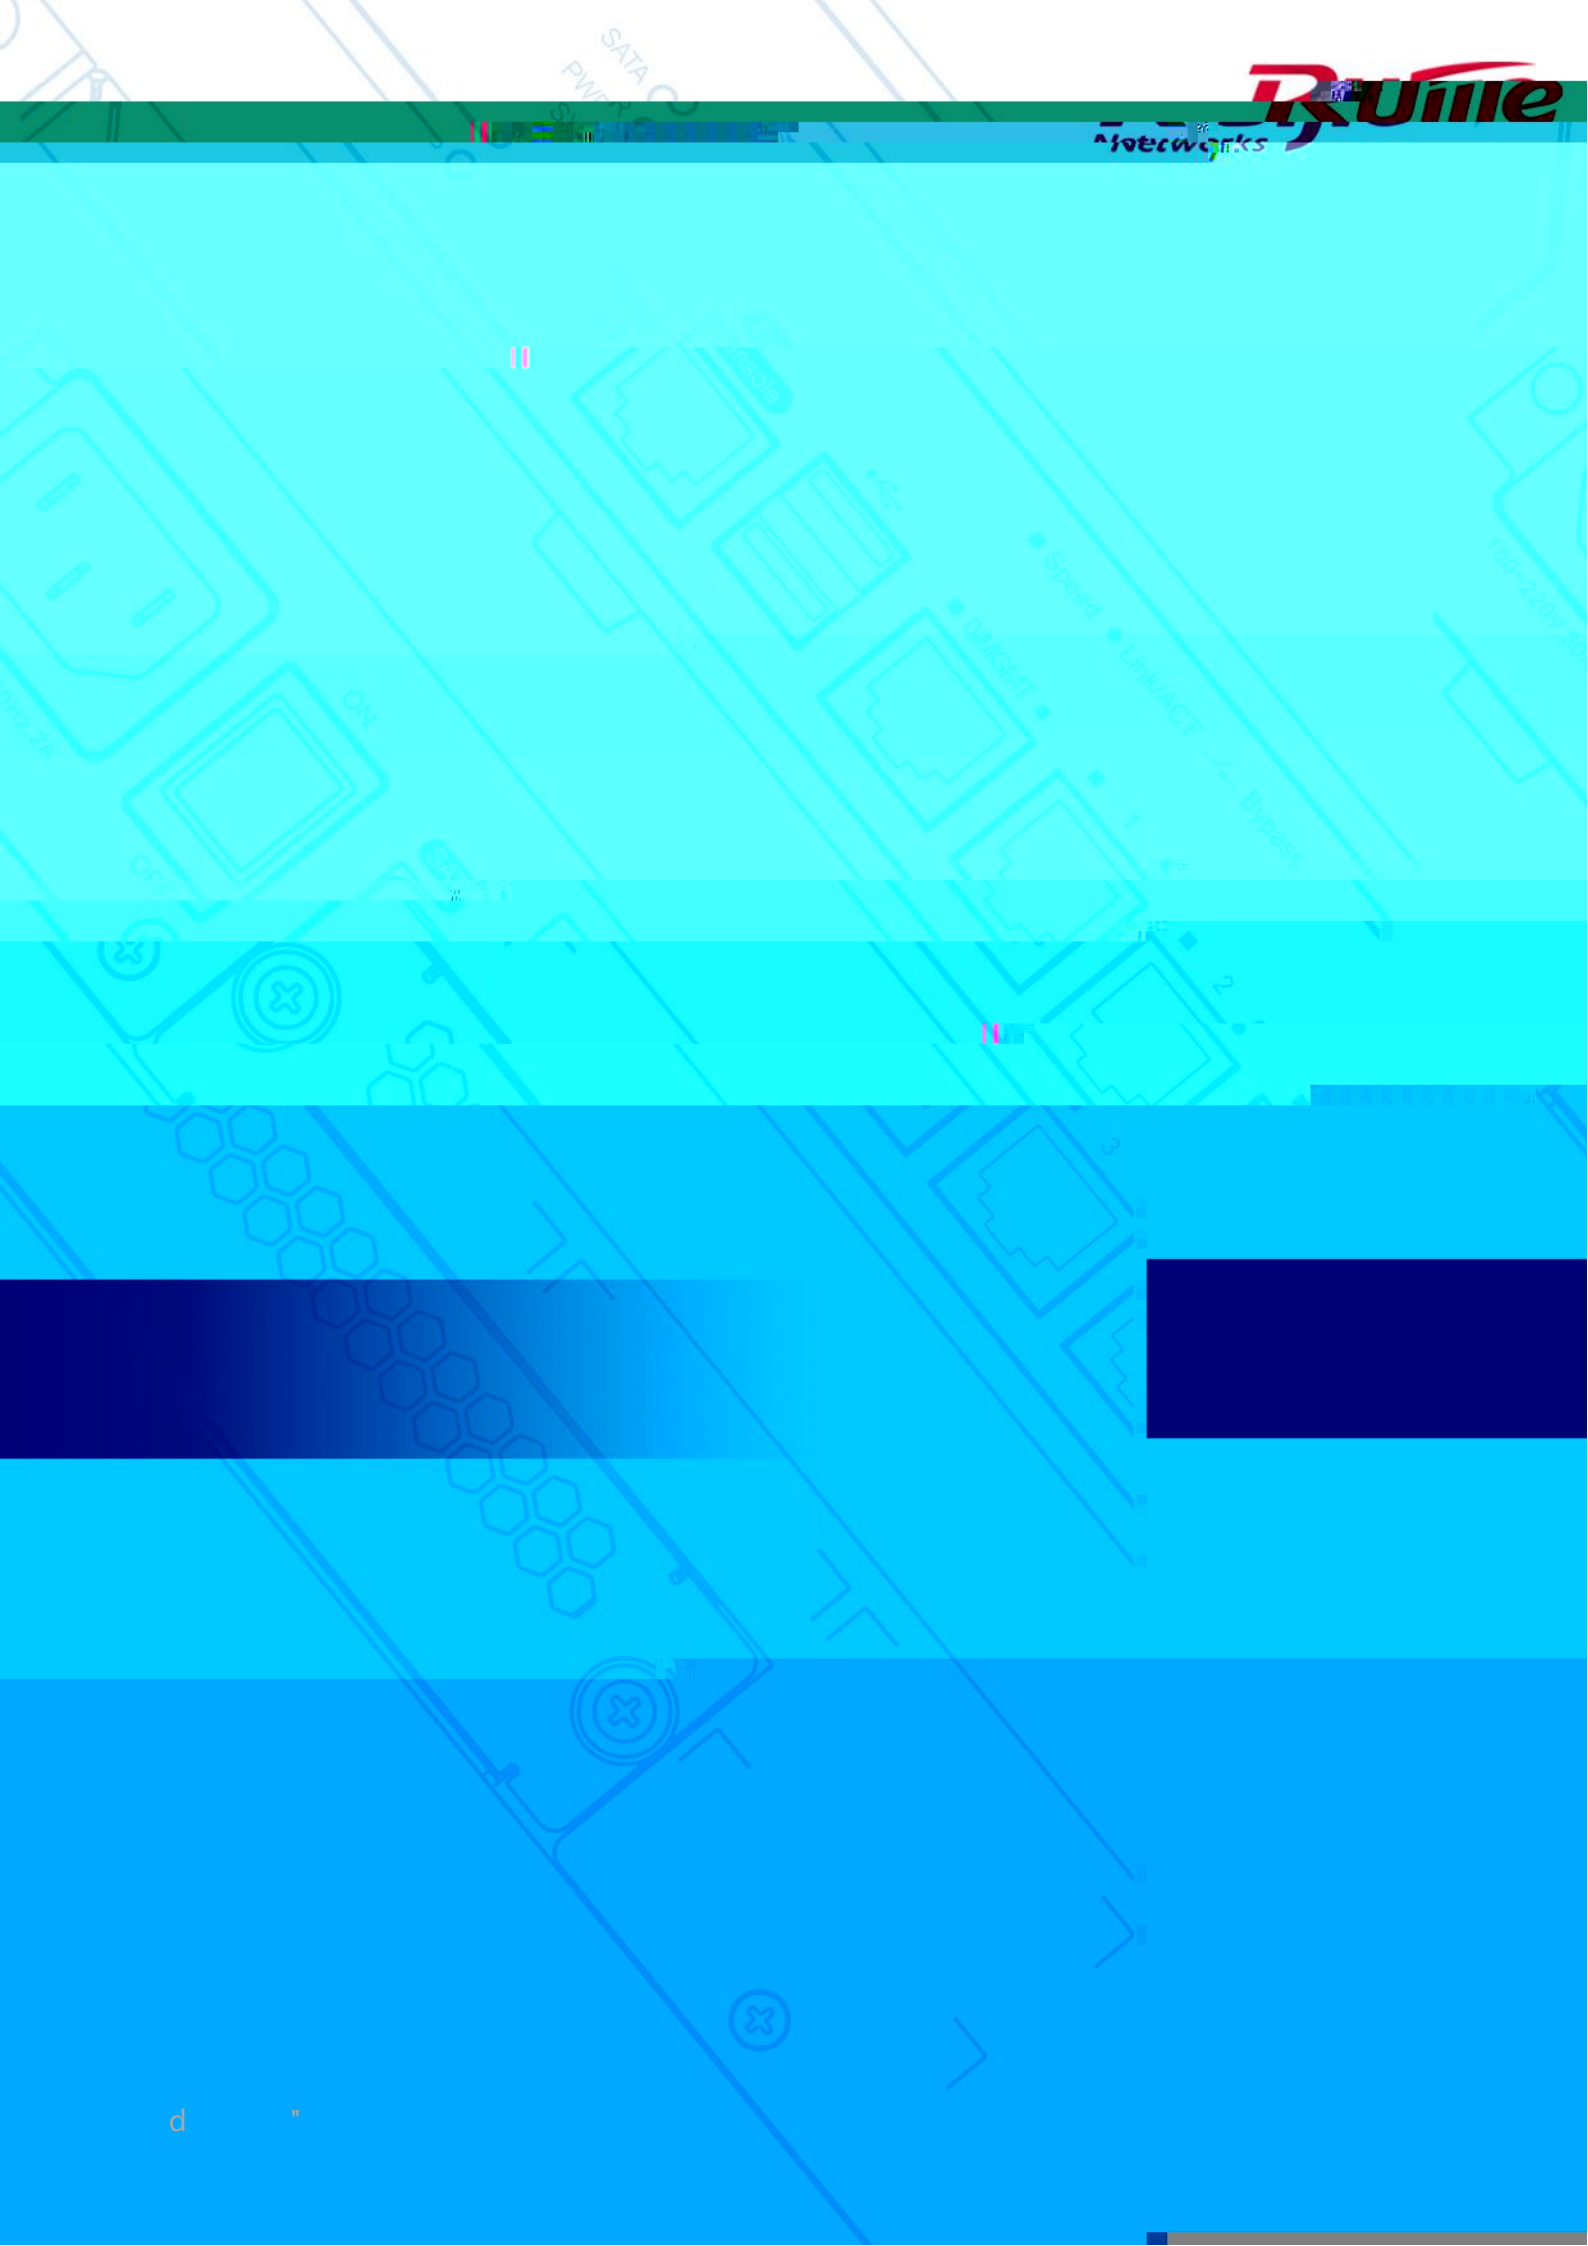

SATA
Power

100-220VAC

Link/ACT

10

100-220VAC

Speed
Link/ACT
Bypass

ON

OFF

SATA

10

100-220VAC

d

"

copyright © 2021



N A

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

7 × 24

4008-111-000

4008111000@ruijie.com.cn

1

QOS

RG-S2600G-I


	10/100Base-T	10/100/1000Base-T	1000Base-X SFP	Console
RG-S2628G-I	24	2	2	1
RG-S2652G-I	48	2	2	1

1.1 RG-S2628G-I

	RG-S2628G-I
CPU	500M
BOOTROM	8M
Flash Memory	128M
SDRAM	DDRII 128MB
	Mini-GBIC-SX
	Mini-GBIC-LX
	Mini-GBIC-LH40
	Mini-GBIC-ZX50
	Mini-GBIC-ZX80
	Mini-GBIC-ZX100
	1000Base-T
	Mini-GBIC-GT
	SFP
	GE-SFP-STACK1.6M
SFP	1000Base-X 2.5G
	AC


	100-240V~ 90-264V~ 50/60Hz 0.5A HVDC 192-290VDC 0.15A-0.07A
	≤ 3.5mA
	13W
	0°C ~ 50°C
	-40°C ~ 70°C
	10% ~ 90% RH
	5% ~ 90% RH
EMC	GB9254-2008
	GB4943-2011

1-2 RG-S2628G-I

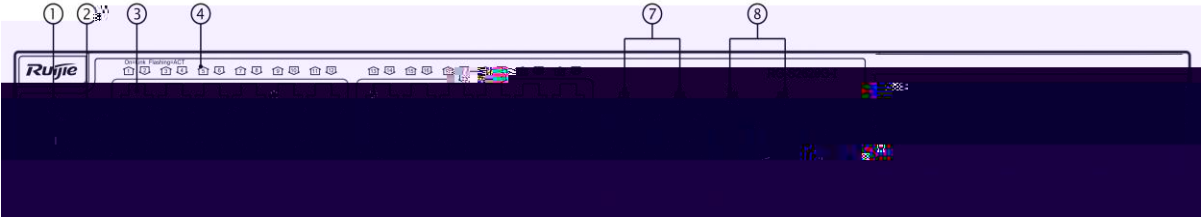

1	5	10/100/1000Base-T
2	6	1000Base-X SFP /2.5G
3	7	10/100/1000Base-T
4	8	1000Base-X SFP

1-3 RG-S2628G-I

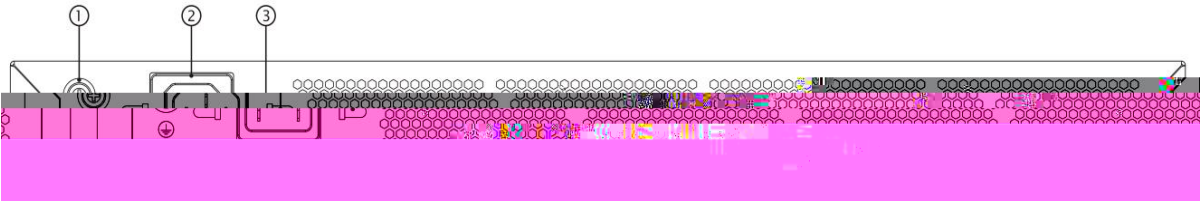

1	3
2	

RG-S2628G-I

- AC
 - 100-240V~
 - 90-264V~
- 50/60Hz
- 0.5A
- 10A
- HVDC
 - 192-290VDC
 - 0.15A-0.07A

RG-S2628G-I


3

10cm


	Status		
			5.2
RJ-45	1~26		Link
			Link up
SFP	27F 28F		Link
			Link Up

1.2 RG-S2652G-I

	RG-S2652G-I	
--	-------------	--

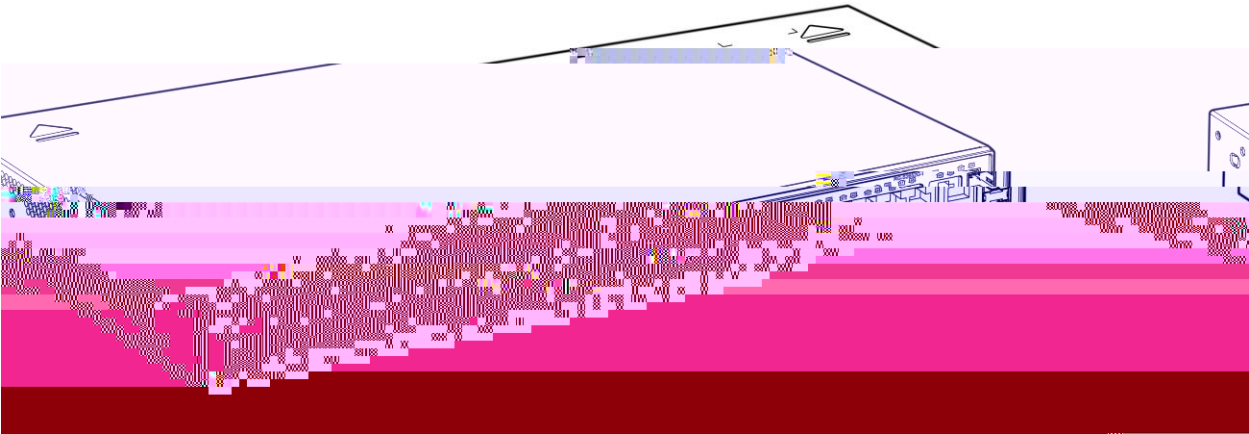


1-5 RG-S2652G-I

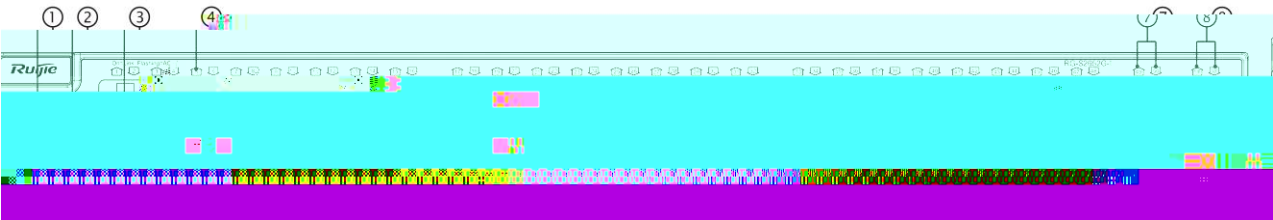

1	5	10/100/1000Base-T
2 Console	6	1000Base-X SFP /2.5G
3 10/100Base-T	7	10/100/1000Base-T
4 10/100Base-T	8	1000Base-X SFP

1-6 RG-S2652G-I

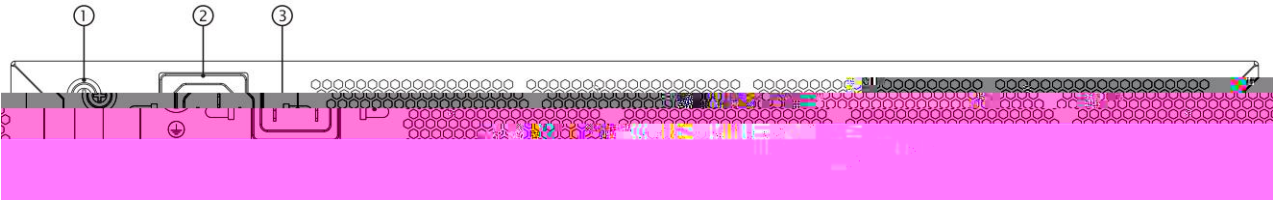

AC

100-240V~

90-264V~

50/60Hz

0.6A

10A

HVDC

192-290VDC

0.2A-0.12A


RG-S2652G-I

3

10cm



2

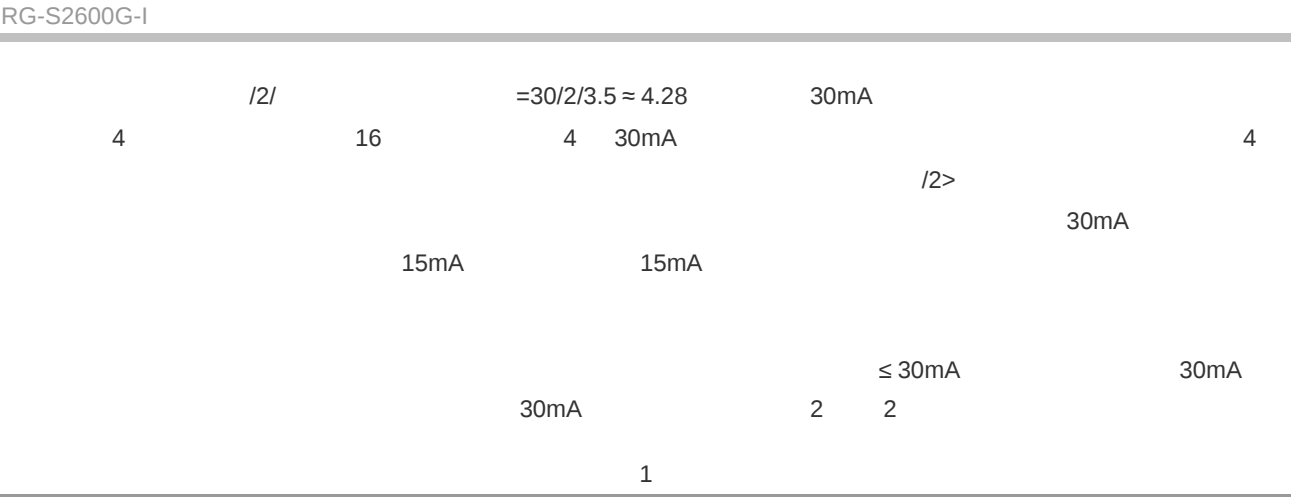

2.1.4

2.1.5

RG-S2600G-I

2.2

RG-S2600G-I

2.2.1

RG-S2600G-I

10cm

3


3

0°C-50°C	10%-90%
----------	---------

0.4m

2.2.3

0.5 μm	/ m ³	≤ 3.5 × 10 ⁶
5 μm	/ m	

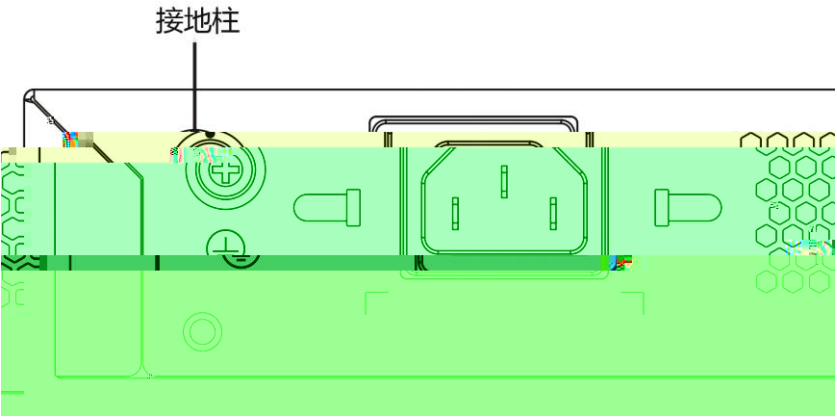

2.2.9

2.2.10 EMI

2.3

2.4

3

3.1


3.2

10




4

4.1

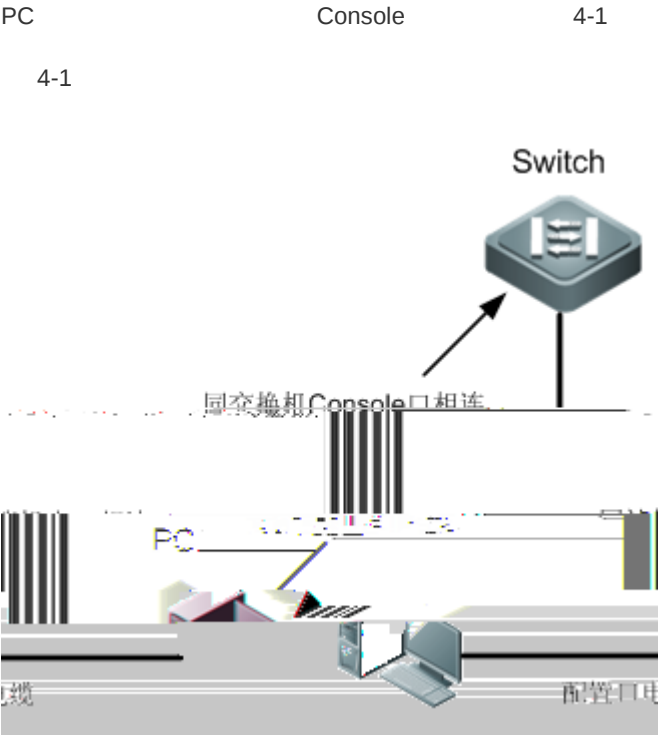

DB-9PC

RJ-45Console

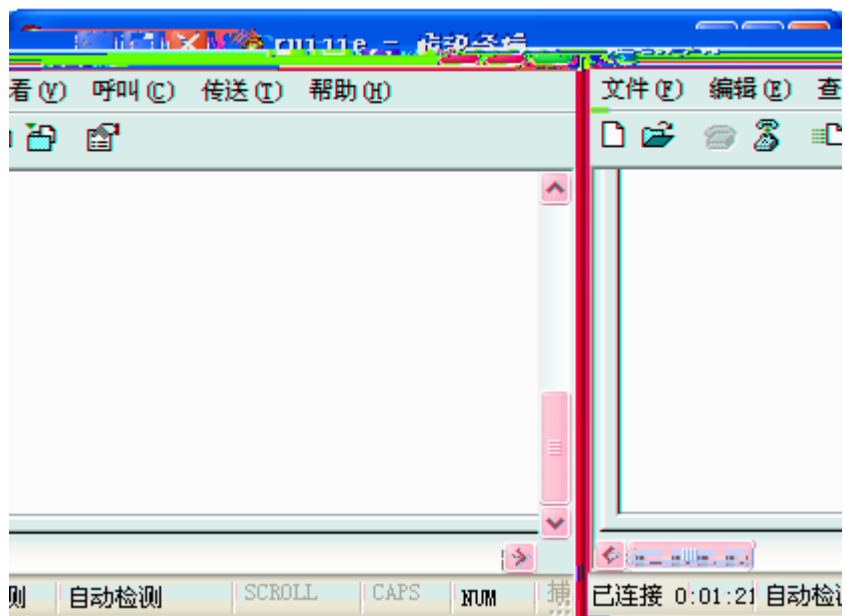


4.2

PC

5

5.1

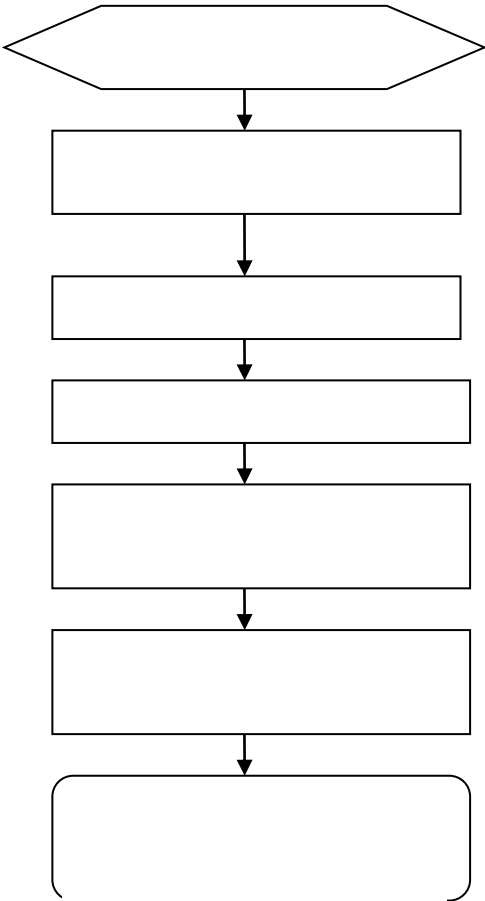

5.2

	-	
status		
Status		
RJ45	100	

A



1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T

MDI/MDIX Crossover


1000BASE-T	IEEE 802.3ab		100-ohm 5	5	UTP	STP
	STP	100				
1000BASE-T	4		4	1000BASE-T		
A-1						
A-1 1000BASE-T						

Switch	Switch	Switch	Switch	
1 TP0 +	1 TP0 +	1 TP0 +	1 TP0 +	
2 TP0 -	2 TP0 -	2 TP0 -	2 TP0 -	
3 TP1 +	3 TP1 +	3 TP1 +	3 TP1 +	
6 TP1 -	6 TP1 -	6 TP1 -	6 TP1 -	
4 TP2 +	4 TP2 +	4 TP2 +	4 TP2 +	
5 TP2 -	5 TP2 -	5 TP2 -	5 TP2 -	
7 TP3 +	7 TP3 +	7 TP3 +	7 TP3 +	
8 TP3 -	8 TP3 -	8 TP3 -	8 TP3 -	
100BASE-TX/10BASE-T		10Mbps	100-ohm 3,4,5	100Mbps
100-ohm 5	100			

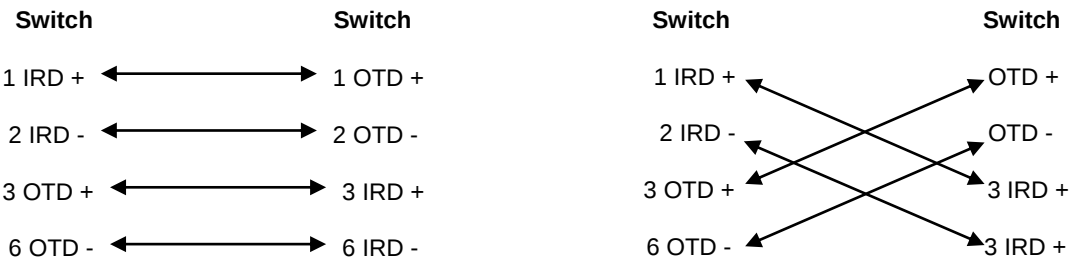

A-4:

A 4

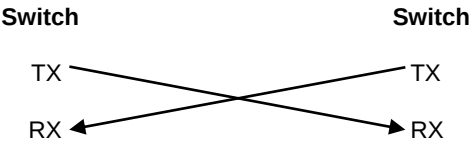

B Mini-GBIC

C

