

RG-DDP

v1.0

©2013



RGOS 10.X (X)

-
-
-

-
-

Ä

[] []

{x|y|...}

[x|y|...]

//

2)



3)



.....	1-3
.....	1-1
.....	2-2
.....	2-2
.....	3-2
.....	4-3
.....	4-3
.....	4-5
.....	4-5
.....	4-6
.....	5-7
.....	5-7
.....	5-7
.....	6-8
.....	6-8
.....	6-8
.....	6-8
.....	6-11
.....	7-12
.....	7-12
.....	7-13
.....	7-13
.....	7-14
.....	8-14
.....	8-14

1 WEB



WEB

WEB

WEB




2

■	WEB	WEB	WEB	PC
		IPAD		
■	Google WEB	Firefox	IE9.0	IE QQ Maxthon
■		1024*768	1280*1024	1440*960


3 WEB

IP http://192.168.1.200,

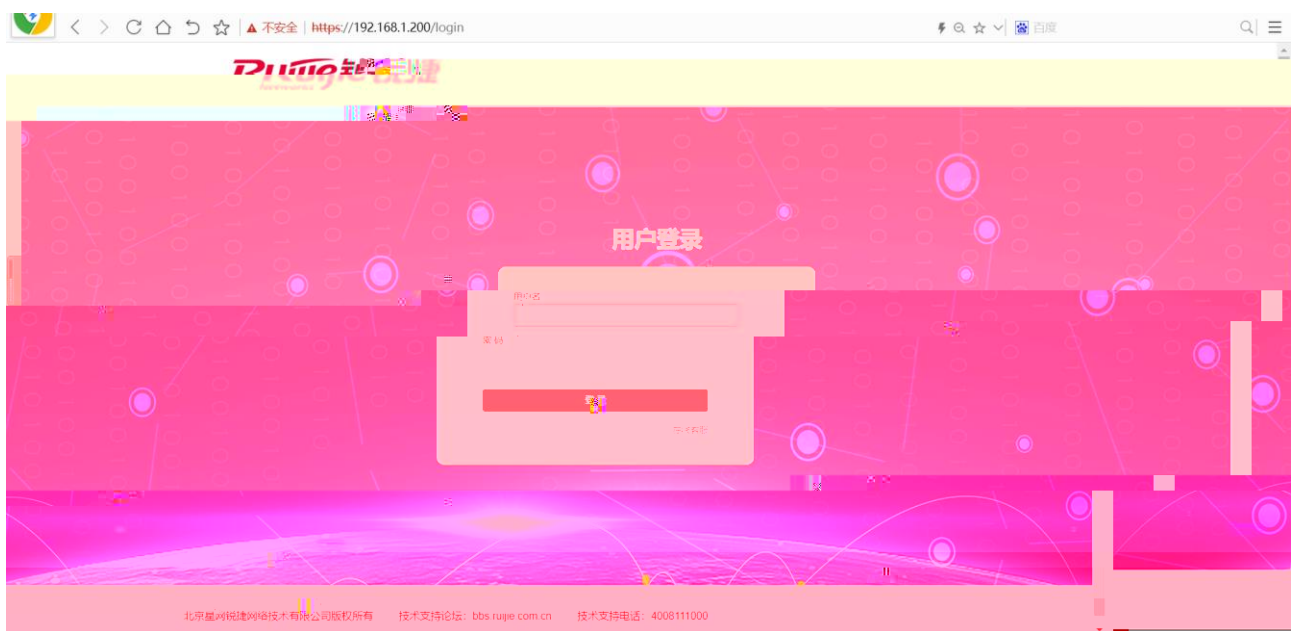

3-1

“ ”

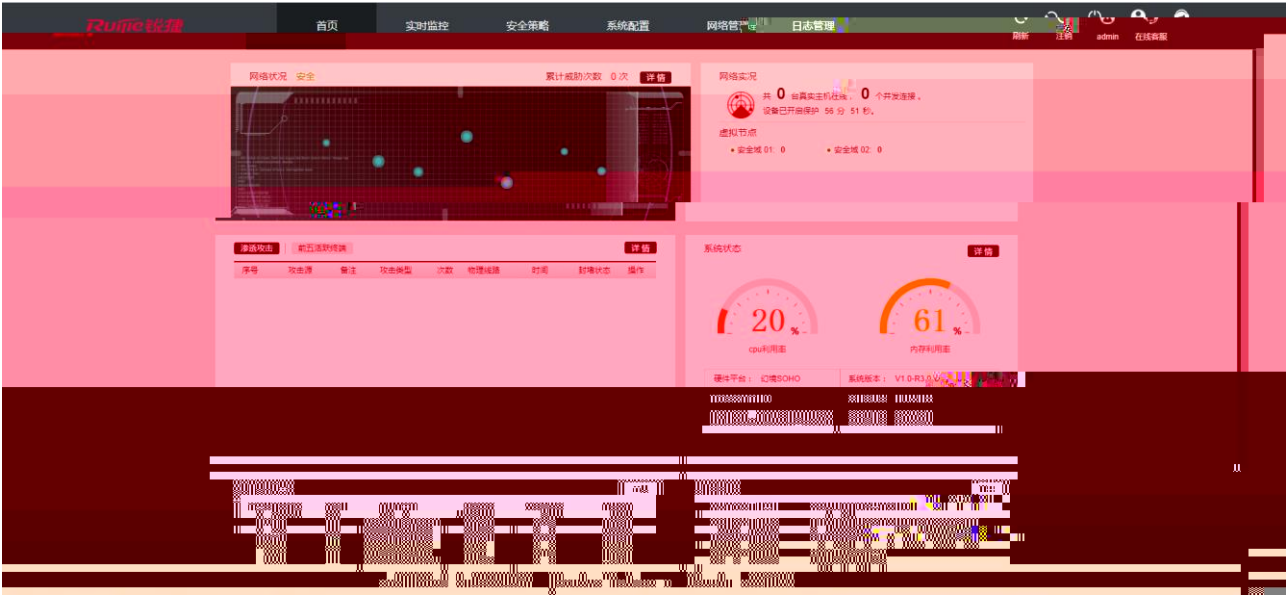

3-2 WEB

4

4.1



>

系统管理员							下载Dkey驱动	新增
1	admin	超级管理员	-	-	-	DKey登陆	删除	写入key
2	admin	管理员	-	-	-	口令认证	删除	修改



4-2






4-3

4.2



> /

/

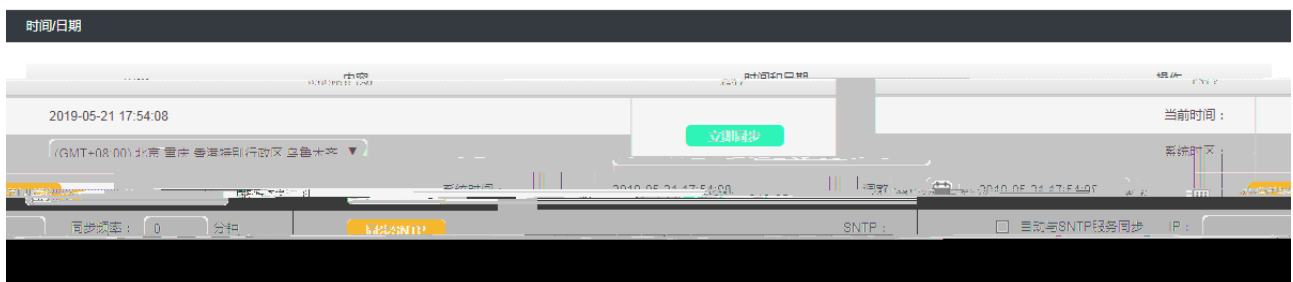

4-4

4.3



>

IP

5

5.1

IP


IP

IP

IP

IP

>

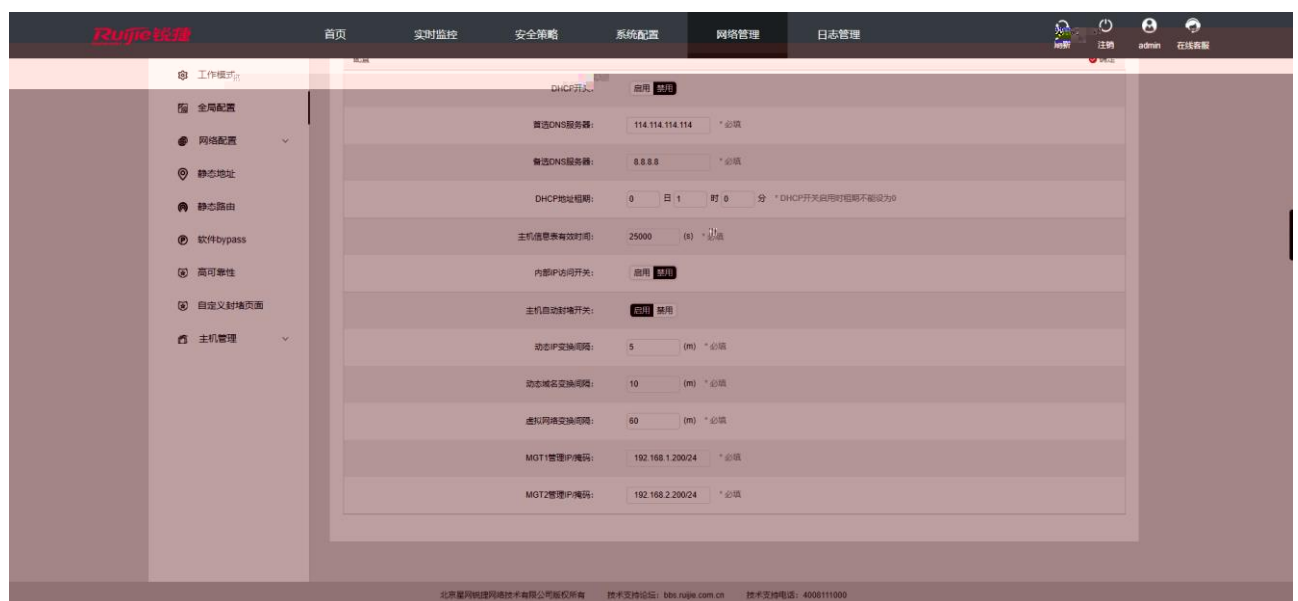

5-1

IP

5.2



>




192.168.2.100	0.0.0.0/0	192.168.2.254
IP	web	



6

6.1

RG-DDP	WAN	trunk
access		

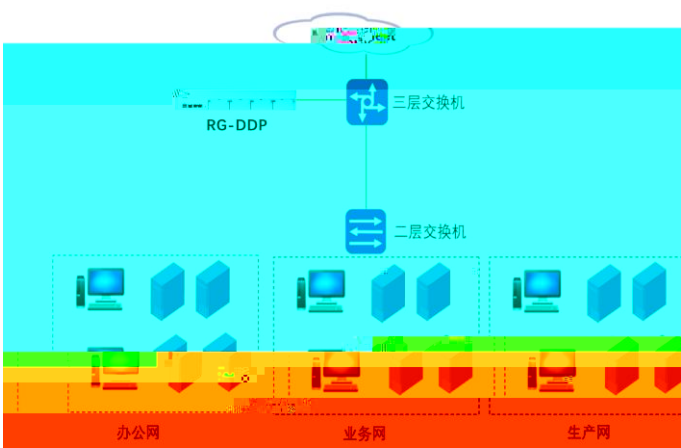

6.1.1

- 1. RG-DDP
- 2.
- 3.
- 4.

6.1.2

RG-DDP			
	https://192.168.1.200	https://192.168.2.200	admin admin
RG-DDP			

工作模式

确定

工作模式：

☐ 串行模式

☒ 旁路模式

间隔检测：

5

s(秒)

(值 : 0 或 5-100的整数 , 0表示不学习)

立即学习

编辑外部IP网段配置

网段:

192.168.1.0

*必填

掩码:

255.255.255.0

*必填

网关地址:

191.168.1.1

*必填

VLAN:

0

*必填(0~4094的整数)

物理线路:

线路1

*必选

探测IP1:

192.168.1.111

*选填(必须为空闲可用IP)


探测IP2:

*选填(必须为空闲可用IP)


取消

确定

VLAN	access VLAN ID 0 turnk VLAN ID VLAN ID VLAN ID 5 GE

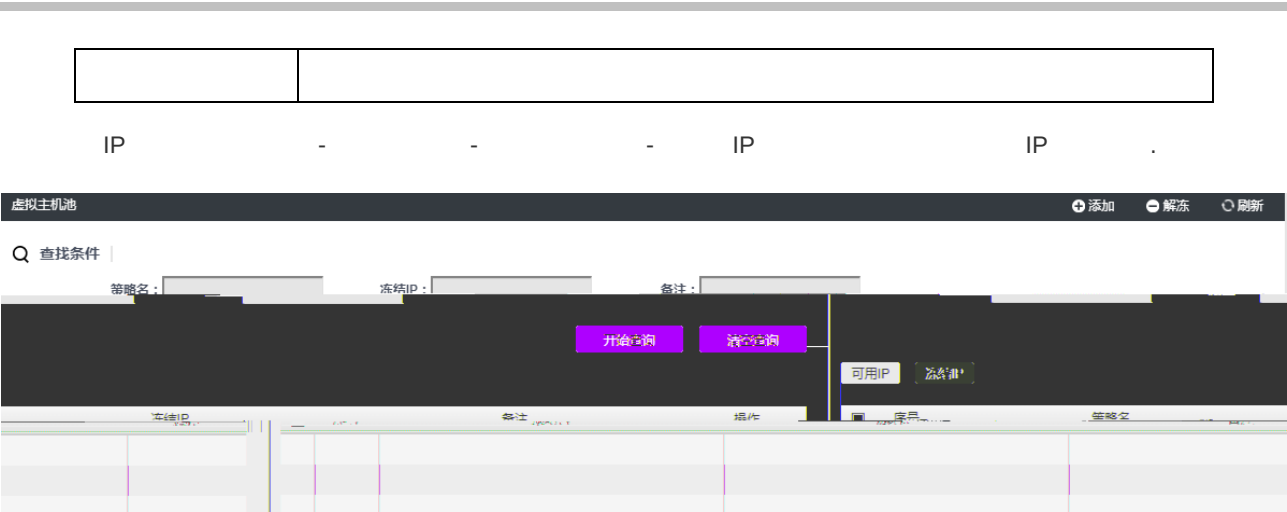

6.2

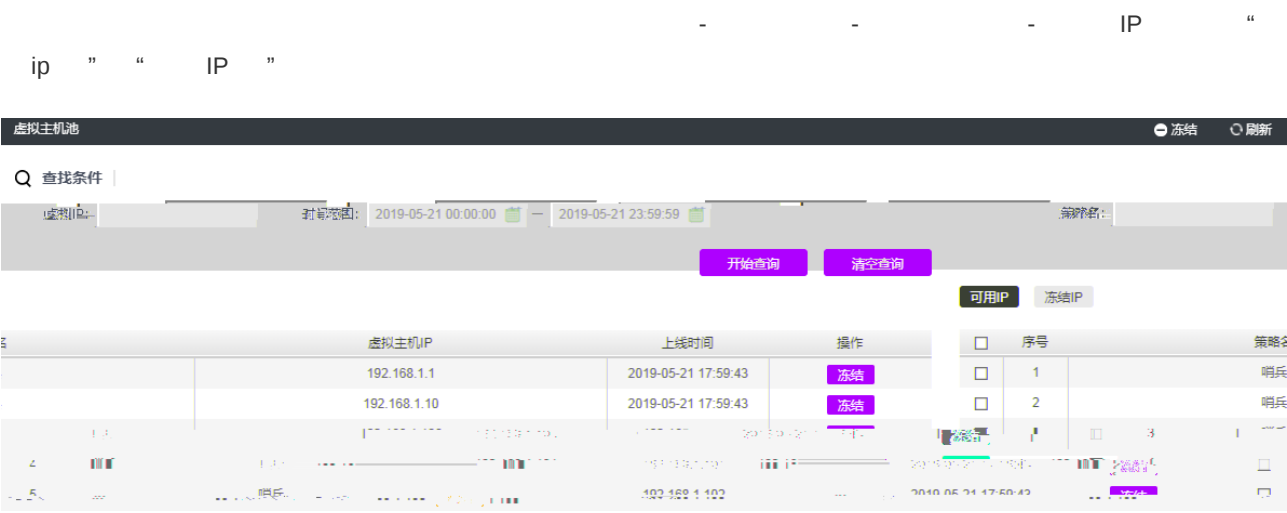

立即学习

✓ 学习成功！

确定

IP

可用IP 冻结IP

序号	冻结时间	冻结IP	冻结IP	冻结IP	冻结IP	冻结IP
1	2019-05-21 17:59:43	冻结	1	明兵	192.168.1.1	
2	2019-05-21 17:59:43	冻结	2	明兵	192.168.1.10	
3	2019-05-21 17:59:43	冻结	3	明兵	192.168.1.10	
4	2019-05-21 17:59:43	冻结	4	明兵	192.168.1.10	
5	2019-05-21 17:59:43	冻结	5	明兵	192.168.1.10	

RG-DDP

IP

IP

IP

序号	冻结时间	冻结IP	冻结IP	冻结IP	冻结IP	冻结IP
1	2019-05-21 17:59:43	冻结	1	明兵	192.168.1.10	




RG-DDP
)

(


7 RG-DDP

7.1

CPU

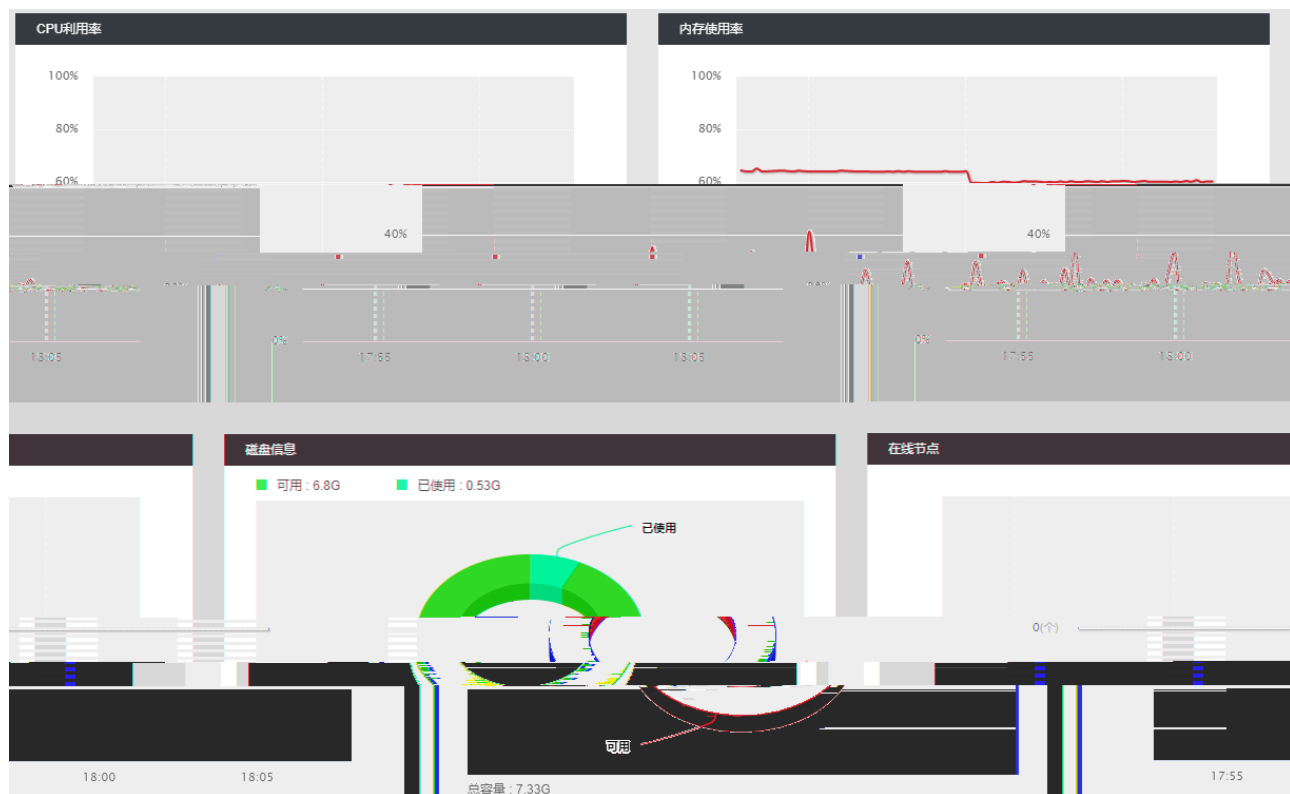

7.2

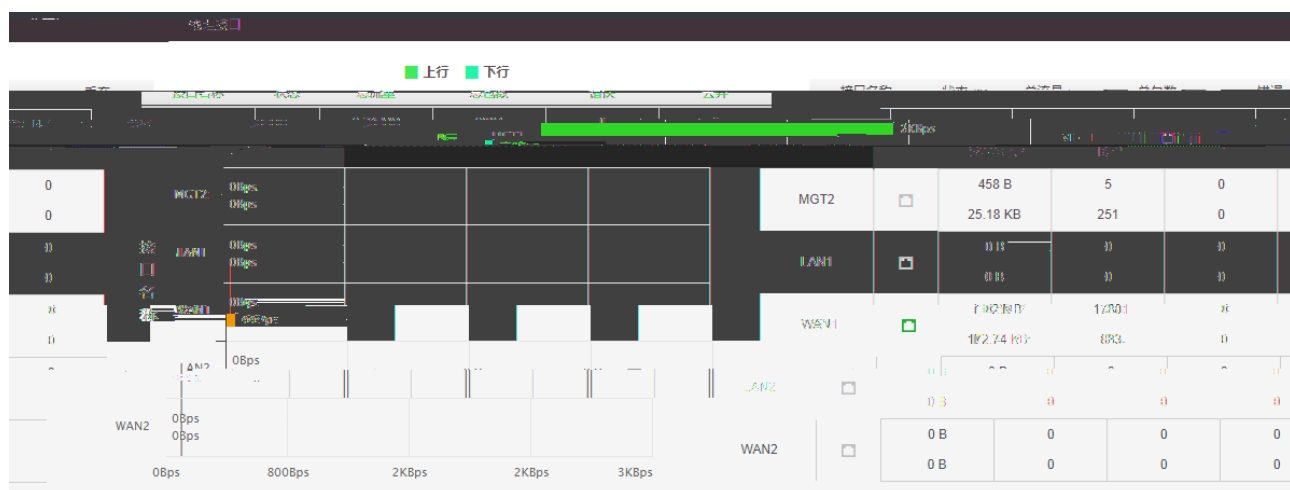

7.3

关机/重启

操作		操作说明	
	确定	重启/关机	☐ 重启 ☐ 关机（提示：电源延迟开关，长按5秒关机）

4		
5		vlan /
6		
7		

8.1.3


8.1.3.1

- 1:
1. “ RG-DDP ” MGT1 “ ” Ge-0/0/X
2. “ ” Vlan
- 2:
- “ RG-DDP ” MGT1 “ ” Ge-0/0/X

8.1.3.2

8.1.3.2.1


1. →

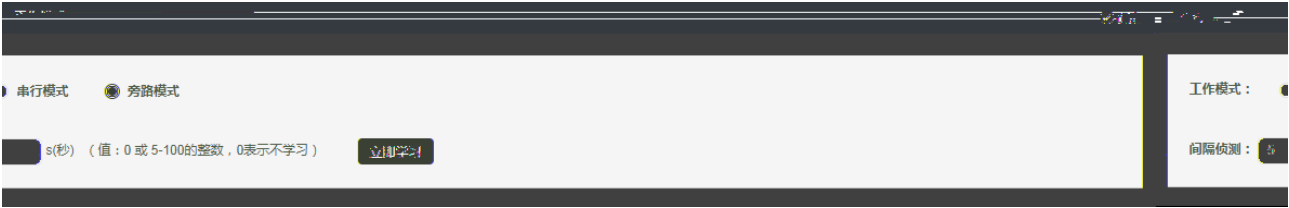

2.
- RG-DDP

8.1.3.2.2

1. →




2.

- DHCP
- DNS 114.114.114.114 ()
- DNS 8.8.8.8 ()
-
- IP
-
- IP 1m
- 1m
- 4m


3. “ ”

8.1.3.2.3

1. → → IP

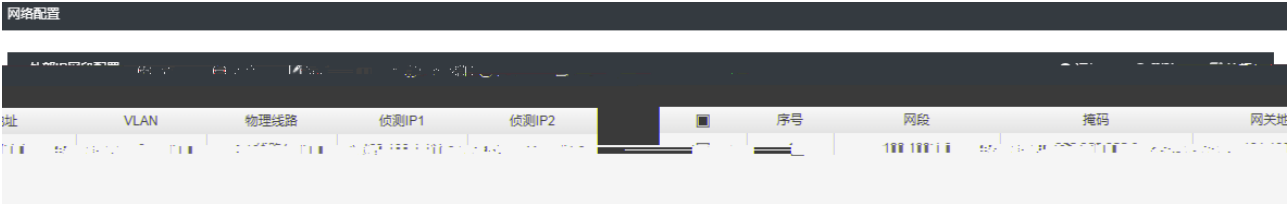

2. “ ”

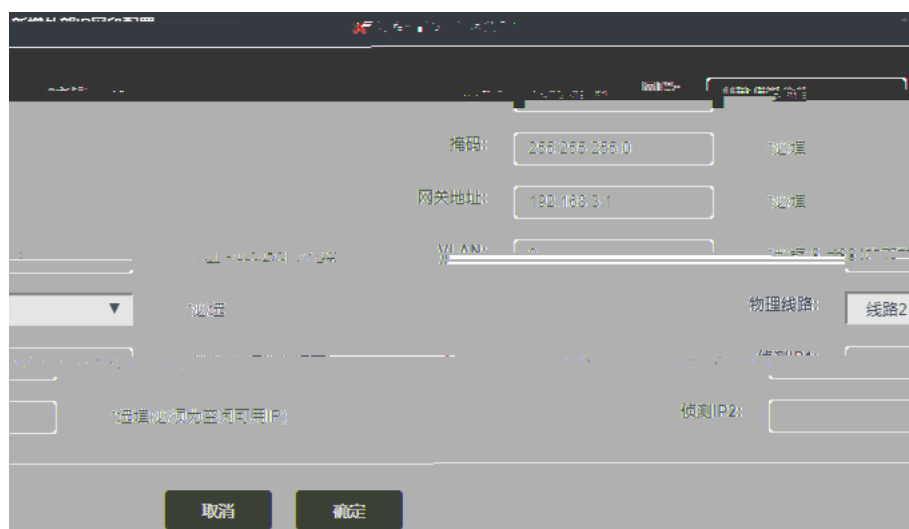

3. (IP)

8.1.3.2.5

1. → →

新增冻结IP配置

冻结IP:

192.168.1.12

策略:

哨兵

备注:

2.

IP

VLAN

IP

VLAN

VLAN

IP

IP

8.1.3.2.7

工作模式

确定

工作模式：

串行模式

●

旁路模式

间隔侦测：

5

s(秒)

(值：0 或 5-100的整数，0表示不学习)

立即学习

8.1.4