


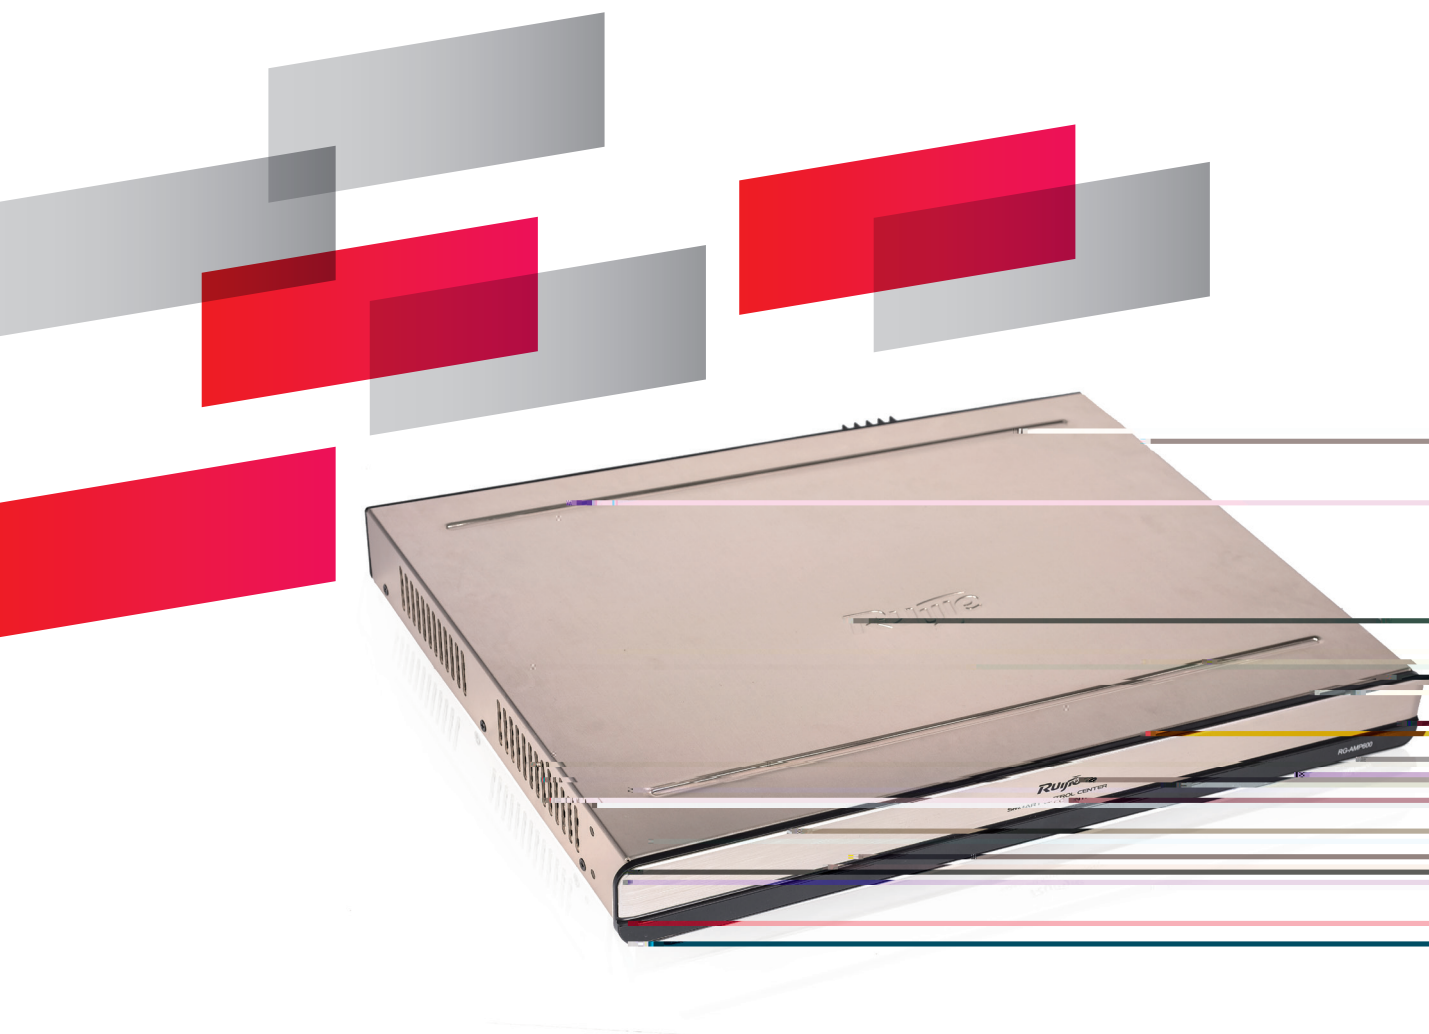

“ ”

“ ” 10 EQ

0.6dB

RS485

1/4

RG-AMP600	
	8Ω/16Ω 80W 2
	D
THD+N	
	30Hz-20kHz
	RS485
RS485	RJ45 PIN 1 GND PIN 3:B,PIN 4:A
	50W/ 4W
	AC 220V-240V 50Hz/60Hz
	5 95 RH non condensing
()	-10 ———+40
(KG)	4
(W D H) (mm)	482.6mm 305.8mm 44mm

RG-Sounder100-G	
	2
	2 3 “
	1 6 “
-3dB	80Hz-16kHz
1W@1m	88dB
H V	140 160
	8Ω
1m	114dB
1m	120dB()
	2.5KHz
	100-10kHz

	RG-Sounder100-G
	80W

