


n





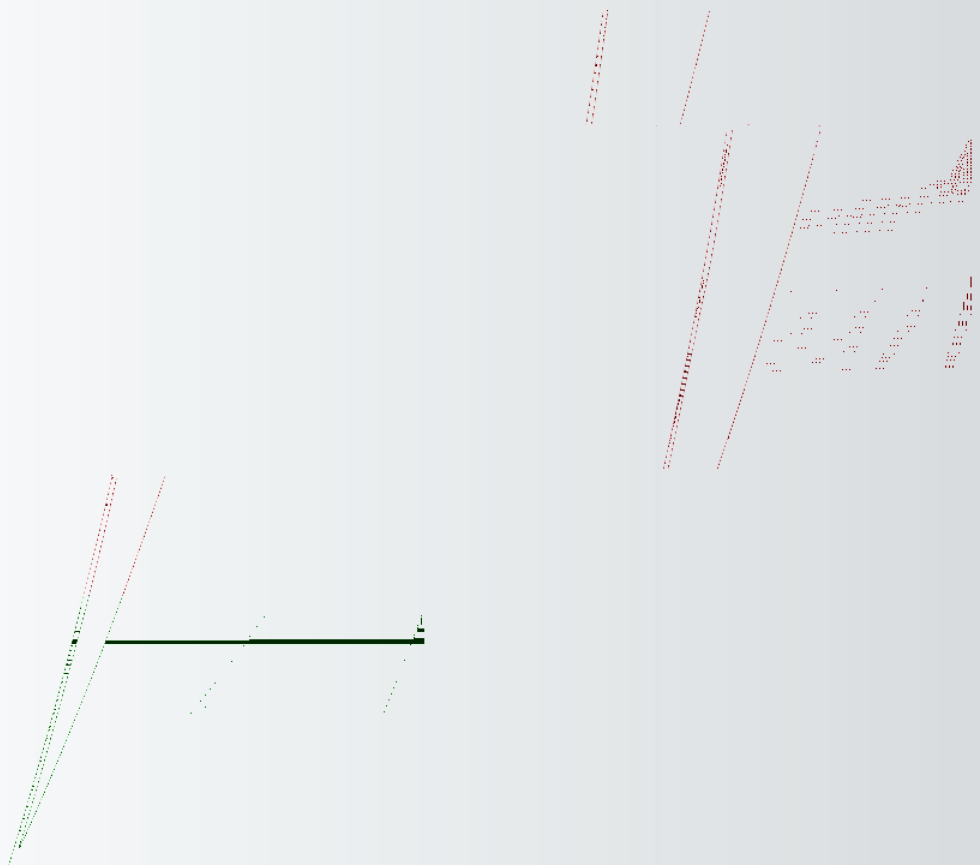

--

Ruijie#show temperature

|

--

/

!

CPU
CPU

CPP

CPU
CPU

/

CRC

show ip route
ARP show arp counter
show run

CPU

show cpu cpu

Ruijie#show cpu

=====



—

CPU

CPP

CPU

CPU

show cpu-protect

cpu

drop

2-3

show cpu-prtotec)

show memory

Ruijie#show memory

System Memory: 1048576KB total, 533892KB used, 514684KB free, **50.9%
used rate**

Used detail: 257708KB active, 61816KB inactive, 48576KB mapped,
173112KB slab, 52900KB core, 13288KB others

75%

80%

4008-111-000

show log

Ruijie#show log

*Nov 26 17:08:54: %LOCAL_DP-5-LC_PROB: Board information in this chassis has been collected.

*Nov 26 17:08:54: %SWITCH-6-INSTALL: Install chassis RG-S6010-48GT4XS on switch 1

*Nov 26 17:08:54: %DP-6-MASTER: Module in slot 0 has translated to master.

show log

up/down

OSFP

up/down

2

4008-111-000



MIB

MAC

SNC
ARP

RIL


MIB
OID

CPU

4008111000

TRAP

n

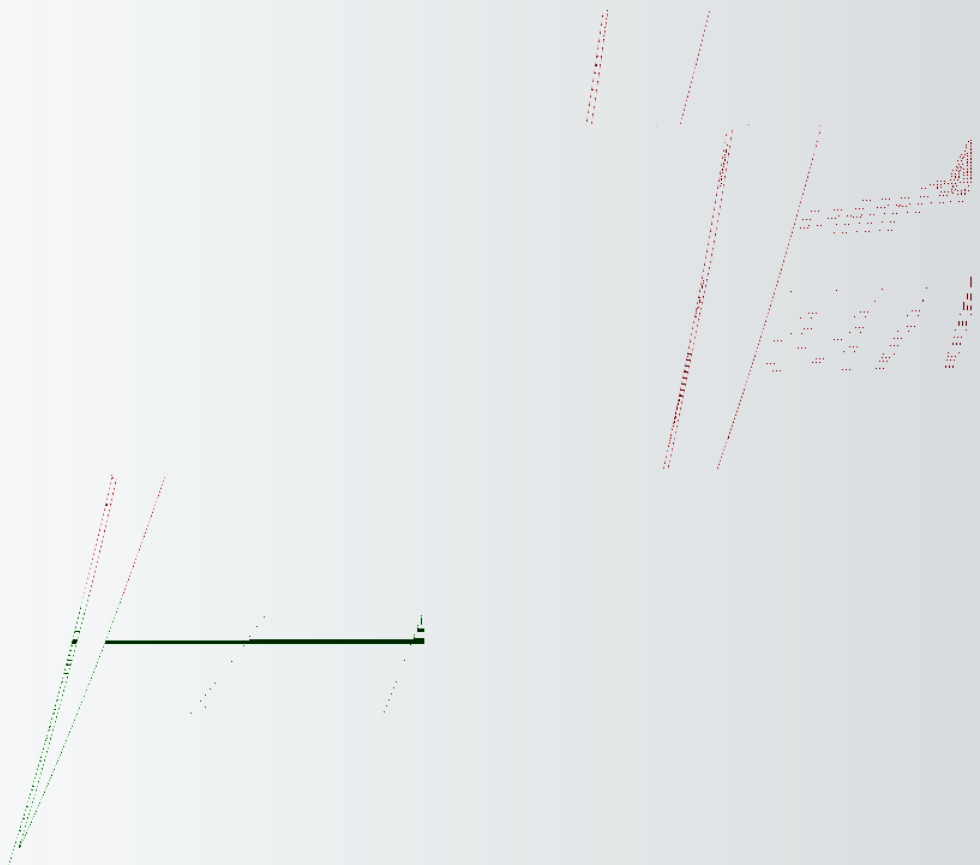



console

console

PC

COM

Console

console

status

PC

"

9600

"

COM

COM

console



/ link UP

/ UP

UP

show interface tran diag

/



Status

Show temper

show fan

show power

show version slots



AP

VSU

AP

show aggregateport load-balance

AP
aggregateport

load-balance

VSU

AP

VSL


no switch virtual aggregateport-lff enable

ECMP

no switch virtual

ecmp-lff enable

n

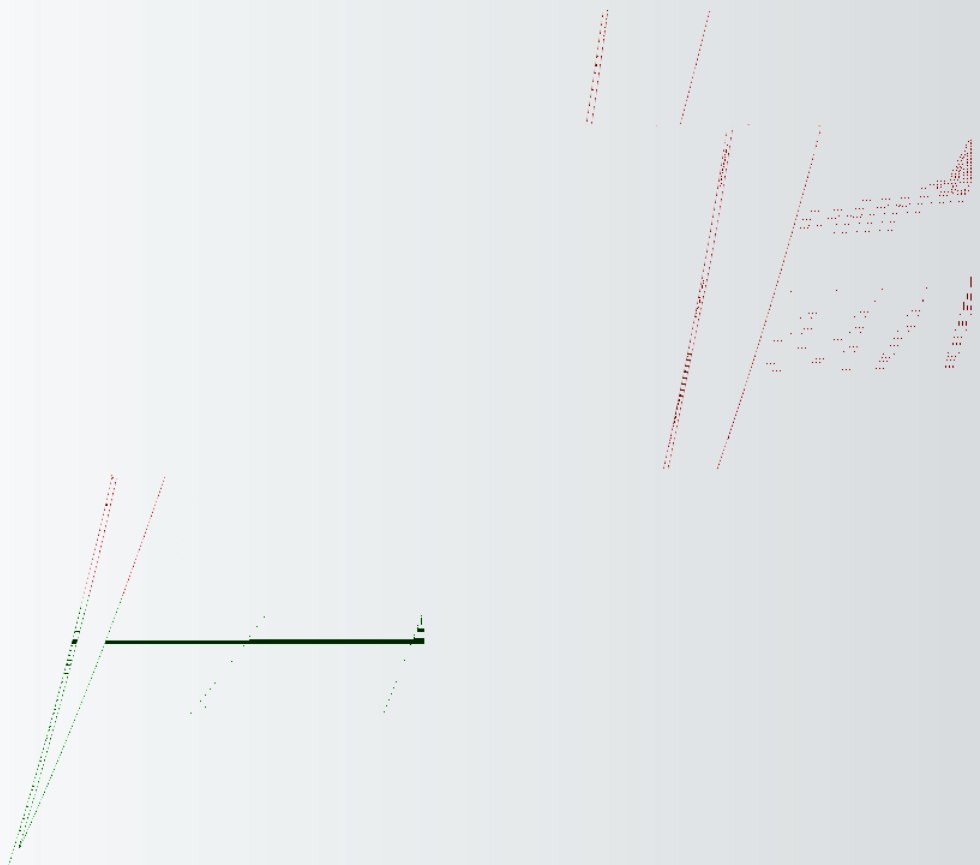



/

)

/
10.X

DHCP
S86 S12000

SNMP



Ruijie#debug support
package

tech-support

4008111000

```
Ruijie#show version detail //
Ruijie#show version slot //
Ruijie#show run //
Ruijie#show cpu // cpu
Ruijie#show cpu-protect // cpu 2
Ruijie#show memory //
Ruijie#show interface // 3-5 show
Ruijie#show interface counters //
Ruijie#show ip int brief //
Ruijie#show ip route //
Ruijie#show ip ospf database // ospf
Ruijie#show arp // arp
Ruijie#show arp counter // arp
Ruijie#show mac-address-table // mac
Ruijie#show clock //
Ruijie#show log //
Ruijie#ping x.x.x.x // ping
Ruijie#traceroute x.x.x.x // traceroute
```

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn