

RG-MF2920U

MF2920U_1.0(1)B2 WEB

copyright © 2022



-
-
-

- <http://www.ruijie.com.cn>
- <http://www.ruijie.com.cn/fw/>
- 7*24h <http://ocs.ruijie.com.cn>
- 7*24h 4008-111-000
- ——— <http://www.ruijie.com.cn/special/fw/tool/xryf/>
- 4008111000@ruijie.com.cn

APP

1.

<>		< >
[]		“ ” []
>>		[]>>[]
“ ”		“

2.








/

3.

1 WEB

1.1

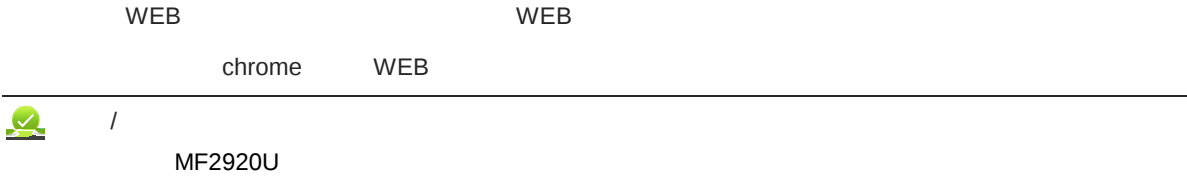

1.2

WEB	WEB


1.2.1 WEB




- (1) WEB PC
- (2) Google chrome 360 qq edge
WEB
- (3) 1600*900 1920*1080

1.3 WEB

1.3.1





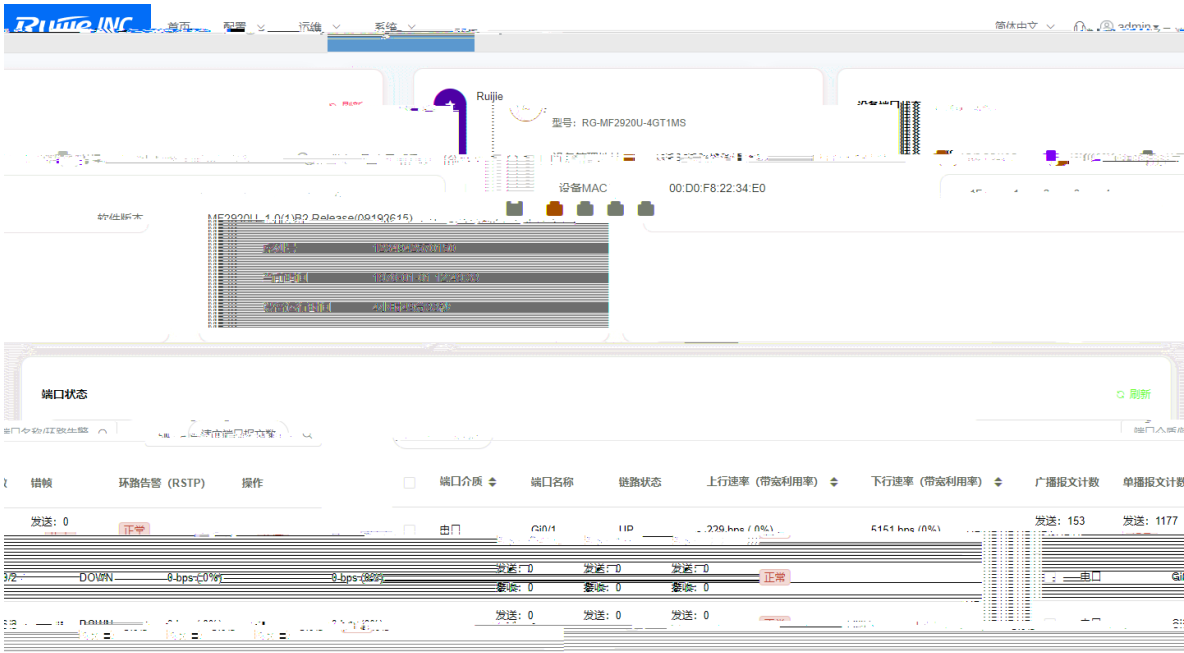

1.

WEB



2.

WEB

1.3.3

1.


/

/

MAC

PoE

/

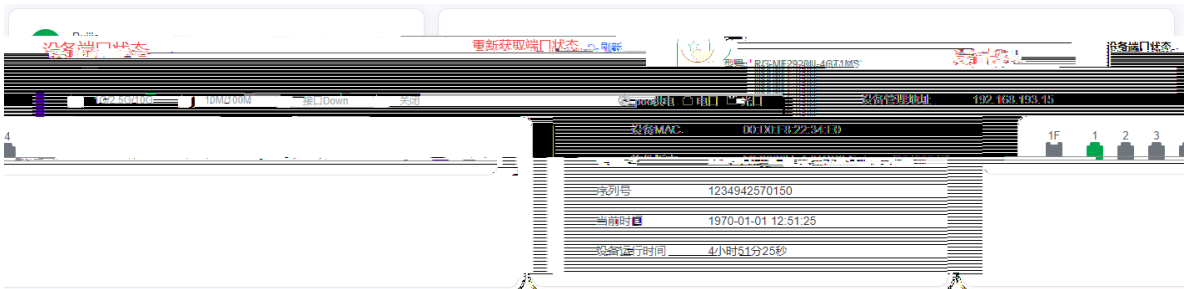

[] < >

2.



< > /

0

< >

/ /

DDM

<DDM >

DDM



DDM

DDM

3. POE /ARP

		总功率：126 W		剩余功率：126 W			
MAC地址	端口	端口	POE开关设置	供电状态	供电功率	IP地址	
0000.f822.3369	GI0/2	GI0/1	开启	关闭	0	172.29.15.1	
		GI0/2	开启	关闭	0		
		GI0/3	开启	关闭	0		
		GI0/4	开启	关闭	0		
		GI0/5	开启	关闭	0		
共 9 条						共 1 条	

● POE

[POE] < > POE

POE POE POE

● ARP


[ARP] < > ARP



1.3.4

1.

(1)

a

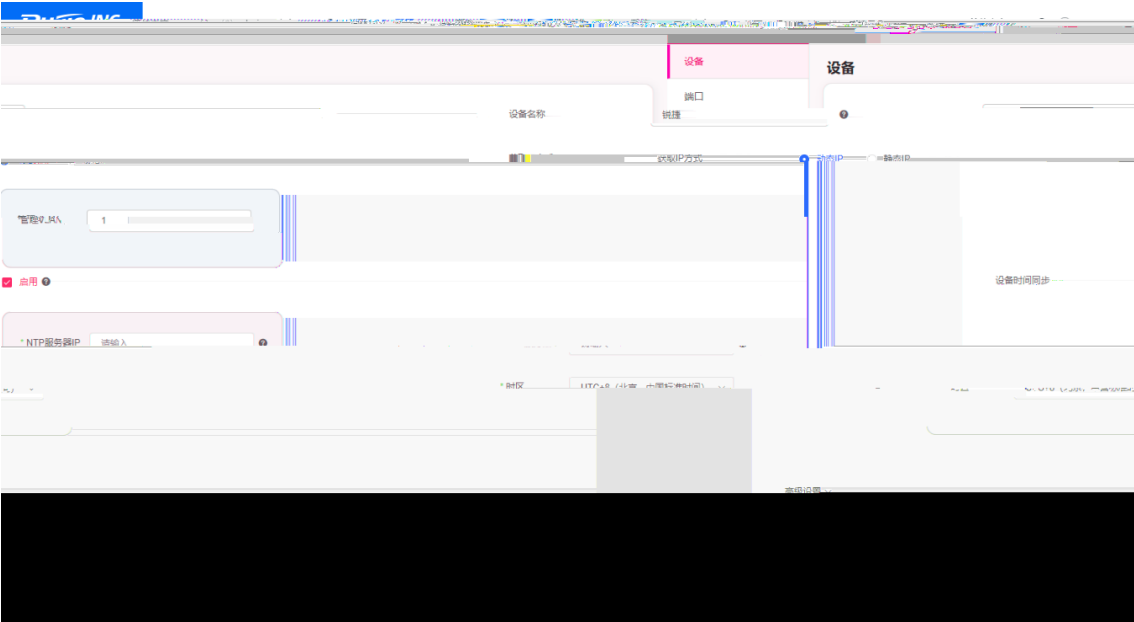

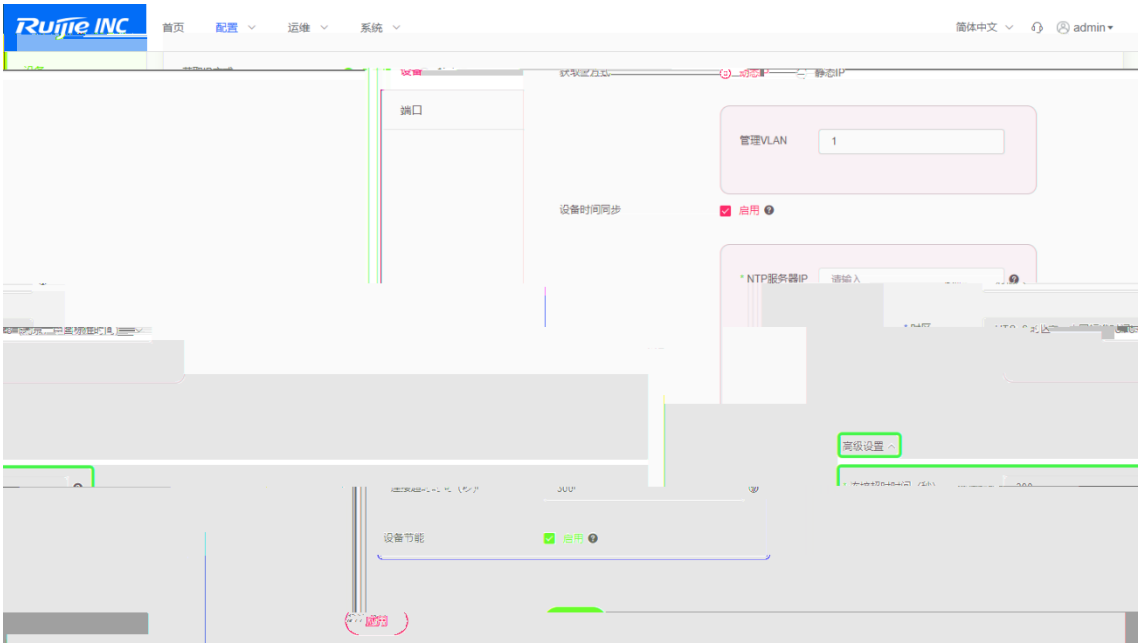


b





< >

< >

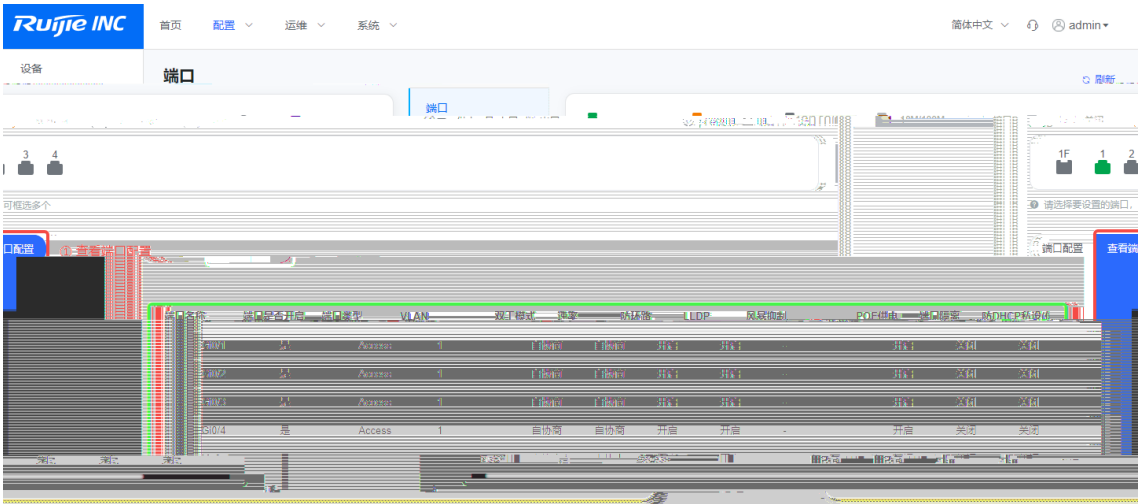

(2) IP

a

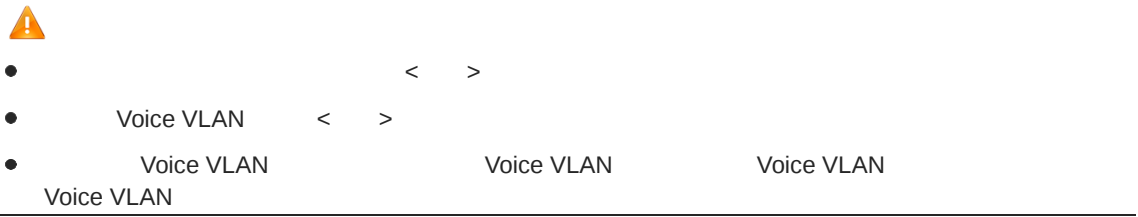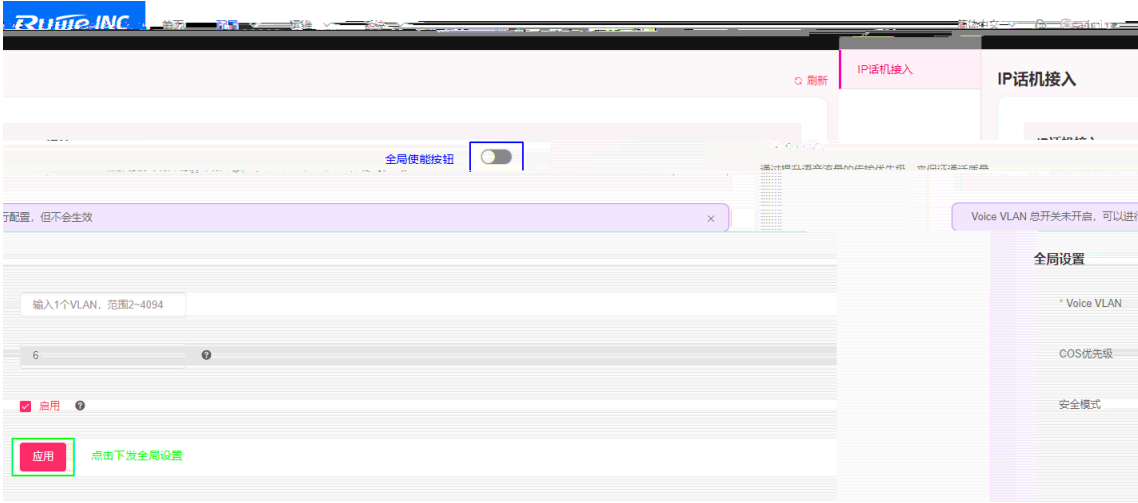

b OUI



<

>

OUI

新增

×

2

* MAC

请输入，例：2222.2222.2222

请输入，例：FFEE55555555.0000

添加

描述

请输入

保存

取消

Mac

< >

OUI



C

< >

Voice VLAN


1.3.5

1.

(1) Ping
[Ping]

IP < >

(2)

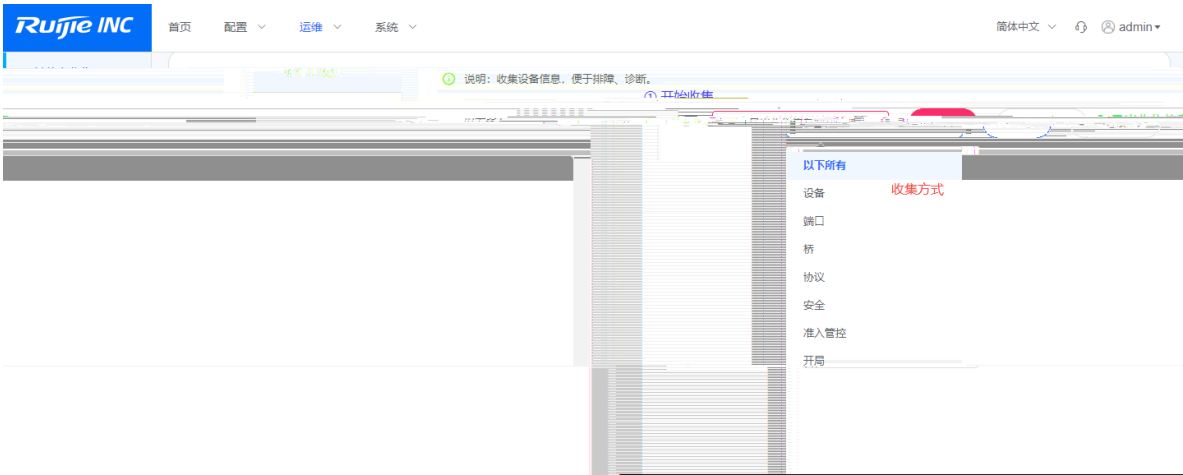

_20220118182247.txt


2.



(1)

< > 1



(2)

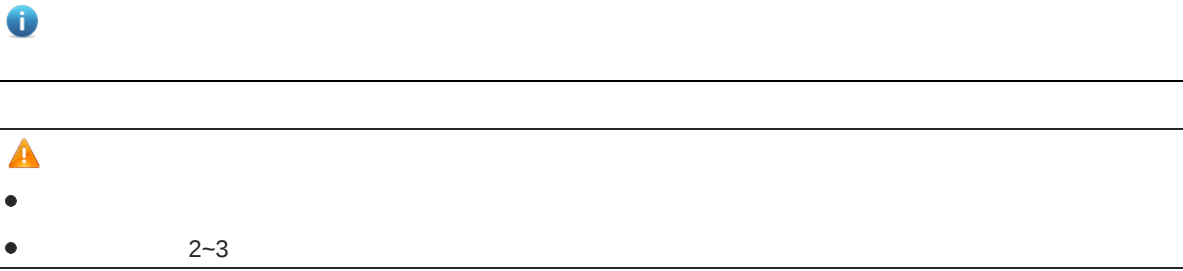

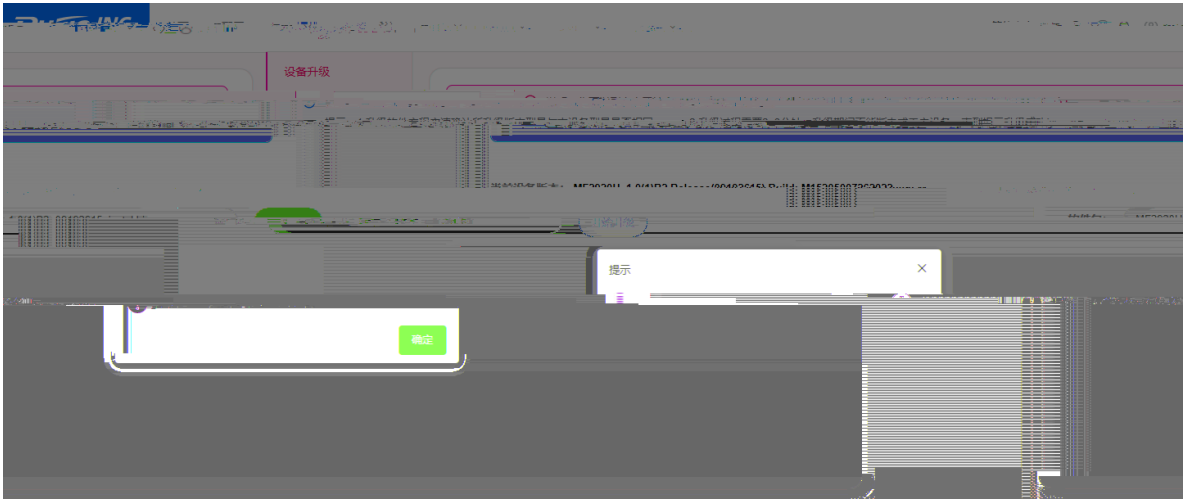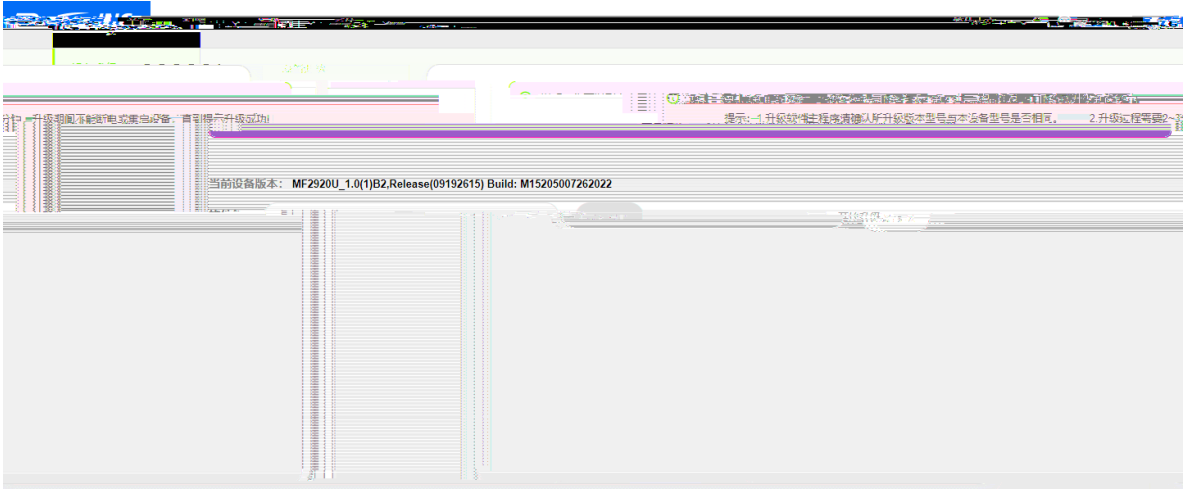

(3) Boot



Boot





< >

(2)



•

2-3

•

<

>

config.json

•

<

>

•

<

>

config.json

1.3.6

1.

(1)

[z



2 CLI




2.1

“ Ruijie(diag)> ”

WEB

CLI




exit

2.2

CLI

reboot

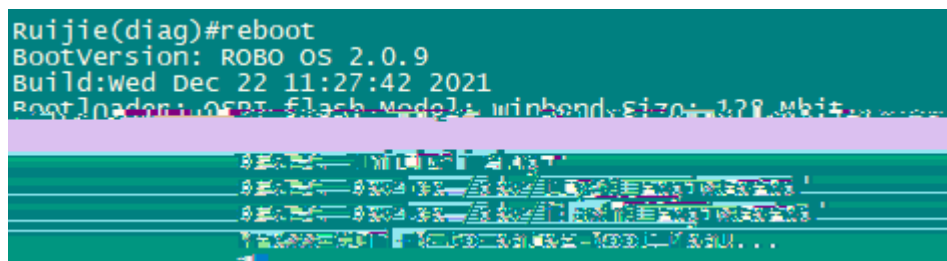

2.3

show_sys_info

2-1 show_sys_info

System description	

2.6 Ping

ping

ping *ip address*