

copyright © 2025



<https://www.ruijie.com.cn>

<https://www.ruijie.com.cn/fw/>

7*24h

<https://ocs.ruijie.com.cn>

7*24h

4008-111-000

——



<https://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn

doc@ruijie.com.cn



APP

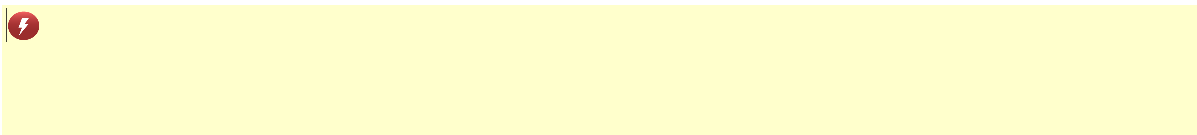

/

		1
1		1
1.1		1
1.2		1
1.3		4
1.4		5
1.4.1		5
1.4.2		5
1.4.3		6
1.4.4		6
1.4.5		7
1.5		7
2		9
2.1		9
2.1.1		9
2.1.2		9
2.1.3		9
2.1.4		10
2.2		10
2.2.1		10
2.2.2 A		


502

3.2		0
3.3		1
3.4		1
3.4.1 86		1
3.4.2		4
3.5		5
3.6		5
3.6.1		5
3.6.2		5
3.7		5
3.7.1		5
3.7.2		5
3.7.3		5
4		6
4.1		6

3.2

6.2.5		9
6.2.6		9
6.2.7		9
7		10
7.1	é	ř ě

RG-AP180(V3)						802.11ax
AP	RG-AP180(V3)					
RG-AP180(V3)		802.11ax		2.4G	575Mbps	5G
2.4Gbps				2.975Gbps		
5	4	LAN	1			RG-AP180(V3)

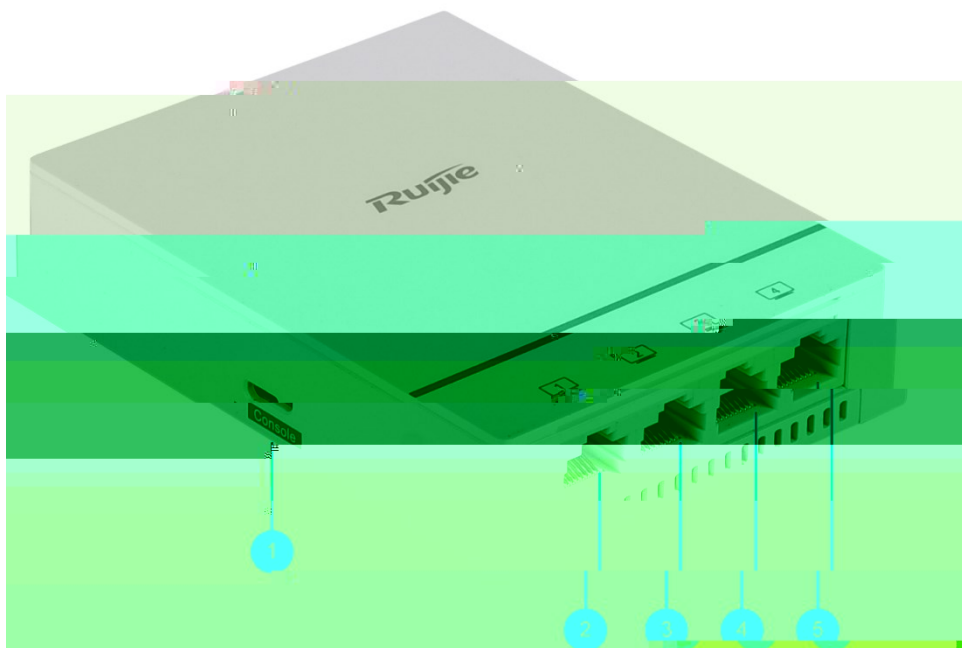

1	Console	
2~5	LAN	

1	WAN/PoE	IEEE802.3af 802.3at PoE



1	RG-AP180(V3)	1	
2		1	
3		1	

4

M4





	2 PoE/PoE+ 802.3af/at
	10W



PoE

802.3af

AP

	-10°C 45°C -40°C 70°C 3000~5000 220 1
	5%RH~95%RH 5%RH~95%RH
	IEC 60950-1 IEC 62368-1 GB 4943.1
EMC	EN301489 EN55032 EN55035



FIT AP FAT AP

		AP
		AP
		AP Link Down
	3 1	FIT AP AP AC CAPWAP
	0.2	FIT AP MACC AP AP

	0.2	
	3 1	AP
	0.2 0.2	FIT AP AP AP

	2	
	5	



AP



/





()


RG-AP180(V3)




AP

	86	AP	JB/T 8593-2013	M4
10±1kgf•cm				


(1) 86

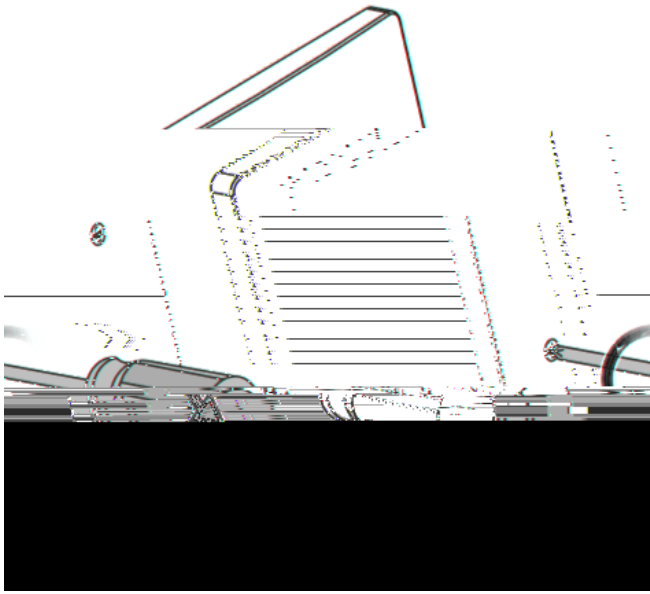

(2) WAN/PoE

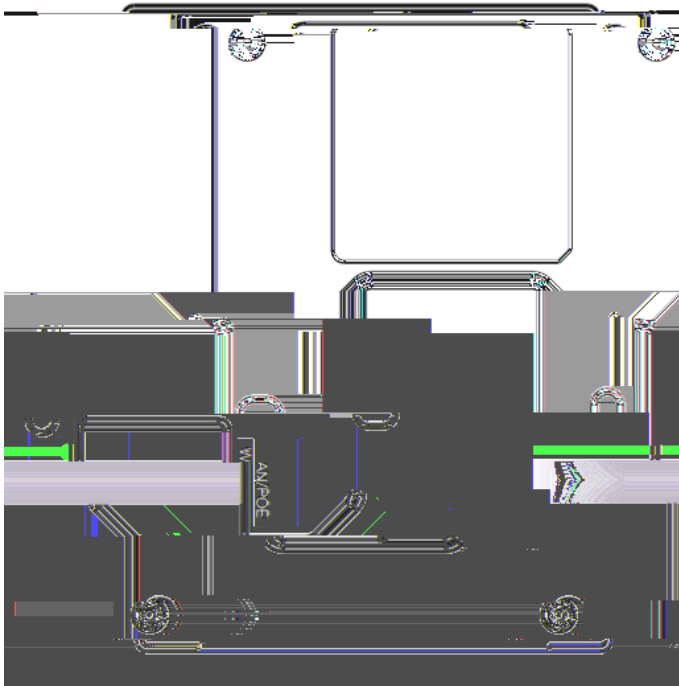


(3) 86




(4)

“ Ruijie ” Logo

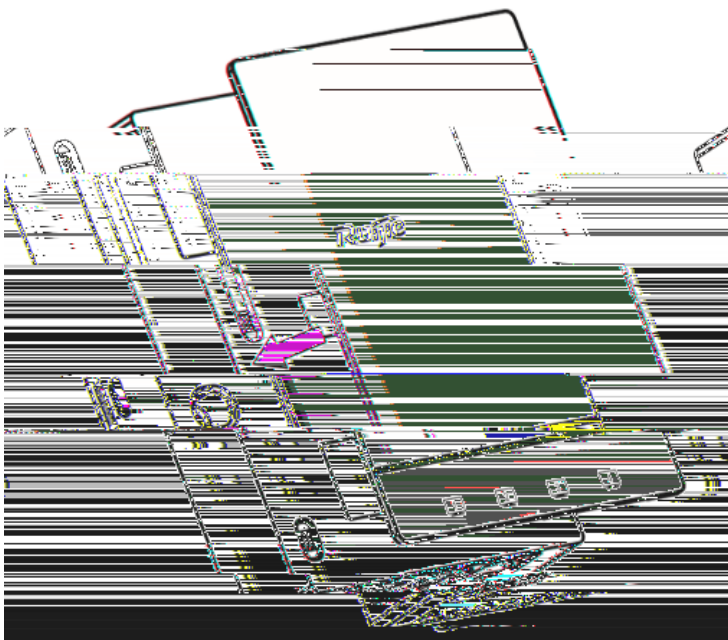


(5)

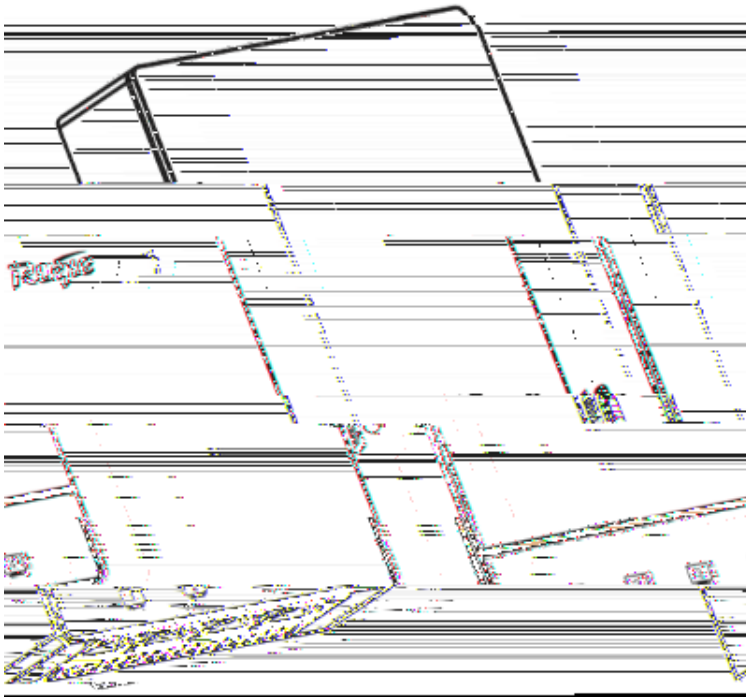

AP

AP

(1)

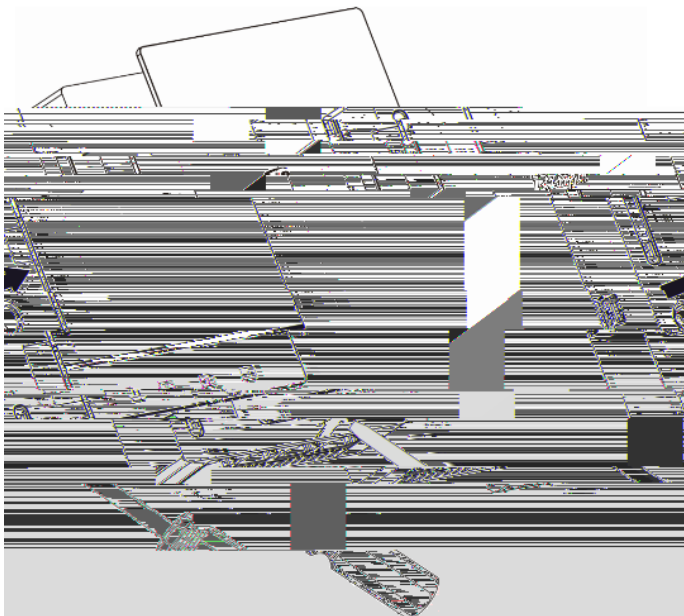

(2)

	AP	LAN/PoE	AP	7.1	
	Console	9600	8	1	AP

1)

DC PoE AP

DC PoE AP

AP AC

PC AP PC PoE




AP	AP	AP
AP	AP	AC

PoE

PoE

802.11af

DC

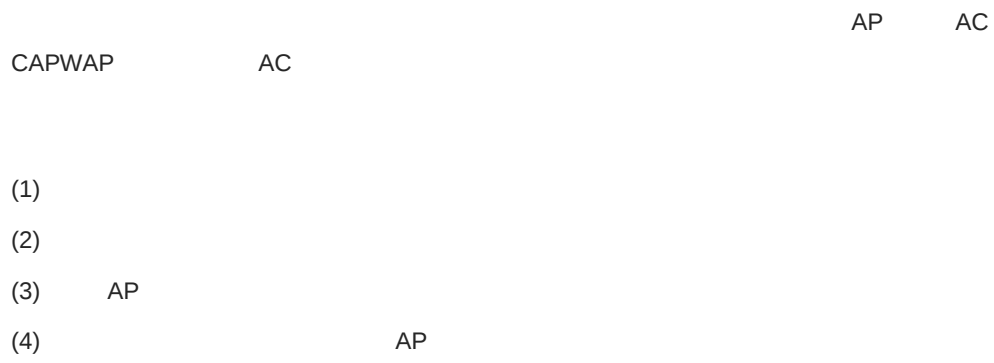


1000BASE-T/100BASE-TX/10BASE-T				
1000BASE-T/100BASE-TX/10BASE-T				MDI/MDIX
Crossover				
1000BASE-T	IEEE 802.3ab	100-ohm 5	5	UTP
STP	100			
1000BASE-T	4	4	1000BASE-T	

100BASE-TX/10BASE-T		10Mbps	100-ohm 3 4 5
100Mbps	100-ohm 5	100	100BASE-TX/10BASE-T



5



7-5

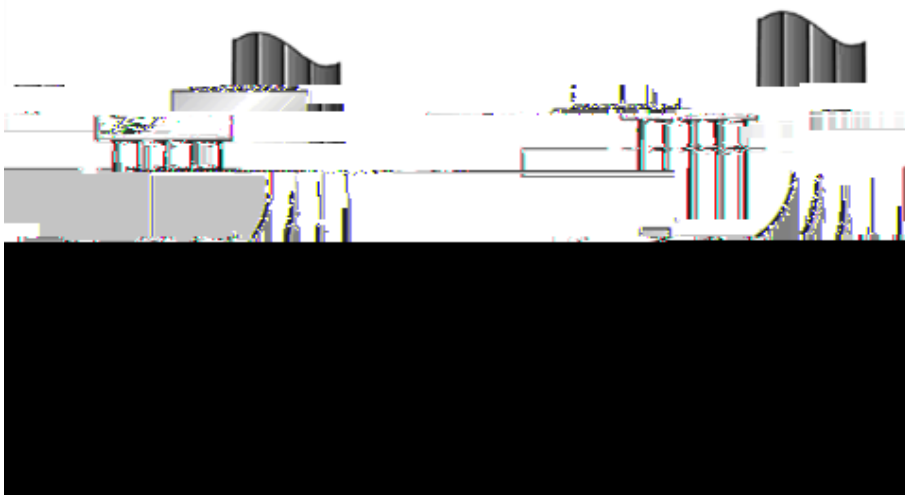

220V

-48V

7-6

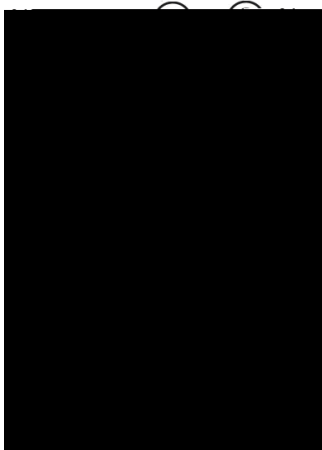

10	80~150
10~30	150~200
30	200~300

DC 12V 1A

2.1mm	5.5mm	10mm	

