

copyright © 2023



-
-
-

-
-
-
-
-
-
-

<http://www.ruijie.com.cn>
<http://www.ruijie.com.cn/fw/>
<http://ocs.ruijie.com.cn>
7*24h 4008-111-000
7*24h
—— <http://www.ruijie.com.cn/special/fw/tool/xryf/>
4008111000@ruijie.com.cn

APP

1.





/

3.

1 WEB


1.1

	WEB		WEB
	chrome	WEB	
	/		
	MF2920U		

1.2





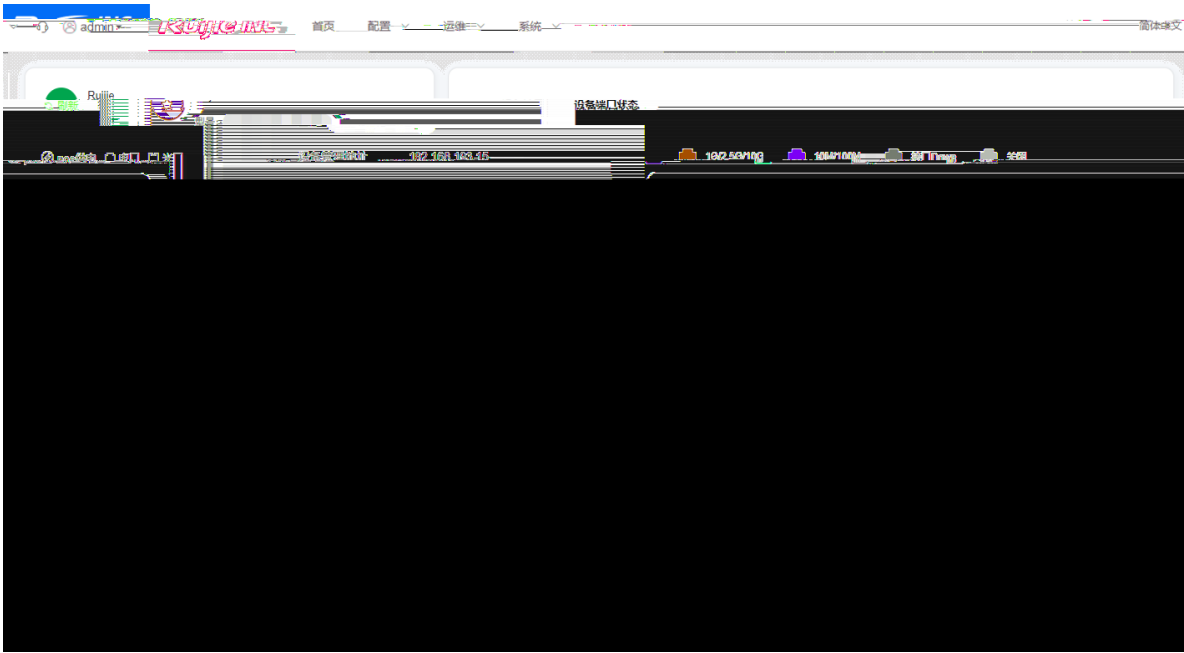

1.

WEB



2.

WEB

1.3.3

1.

/

/

MAC

PoE

/

- [] < >

2.



-

3. POE /ARP


z


- POE

[POE] < > POE

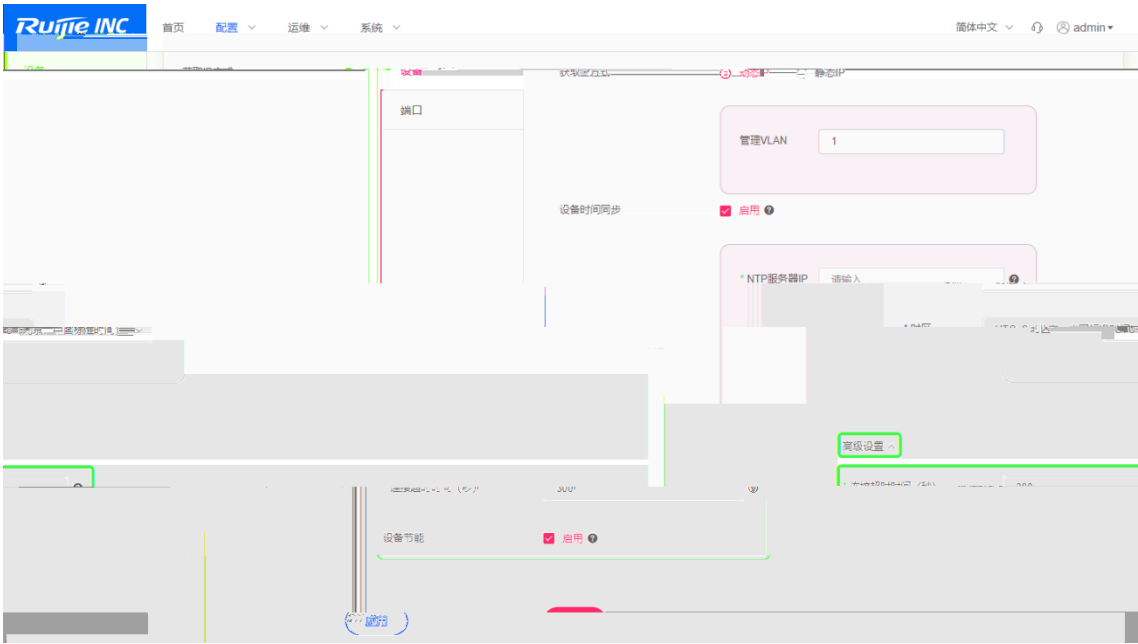


b

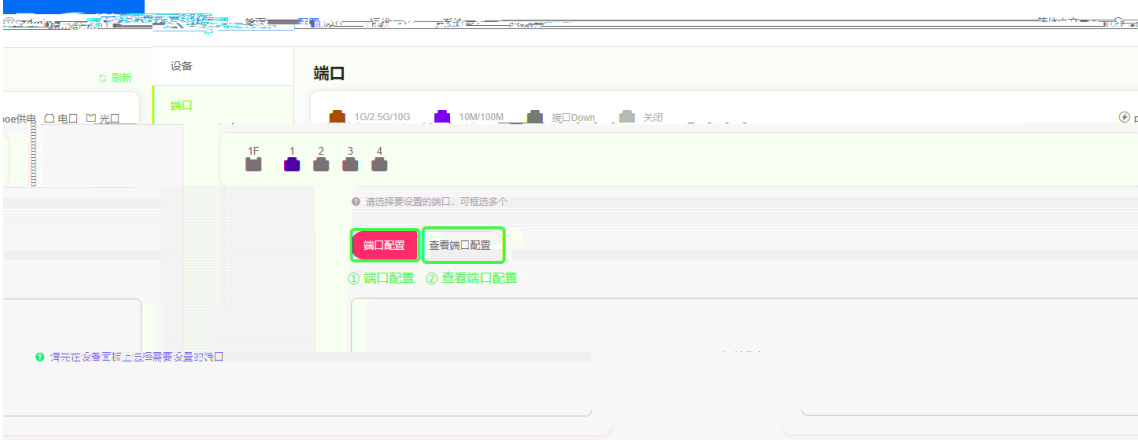

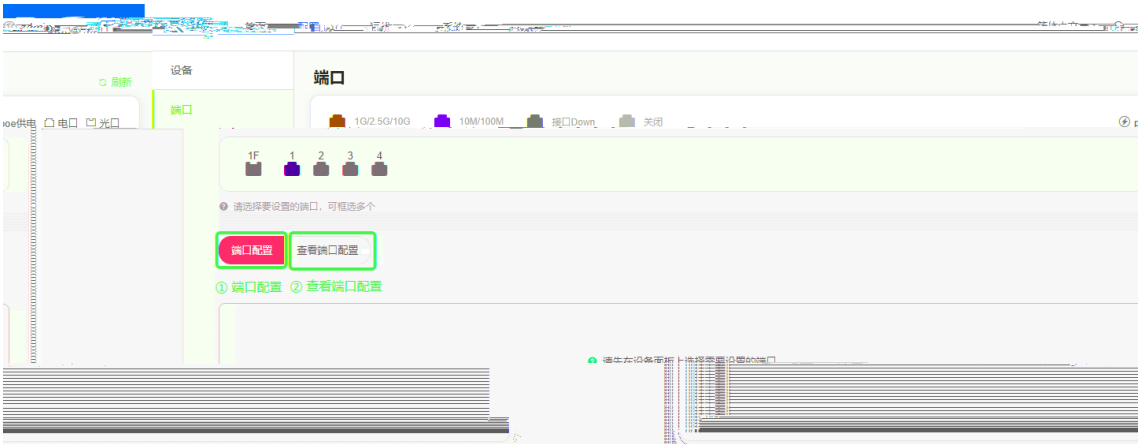

< >


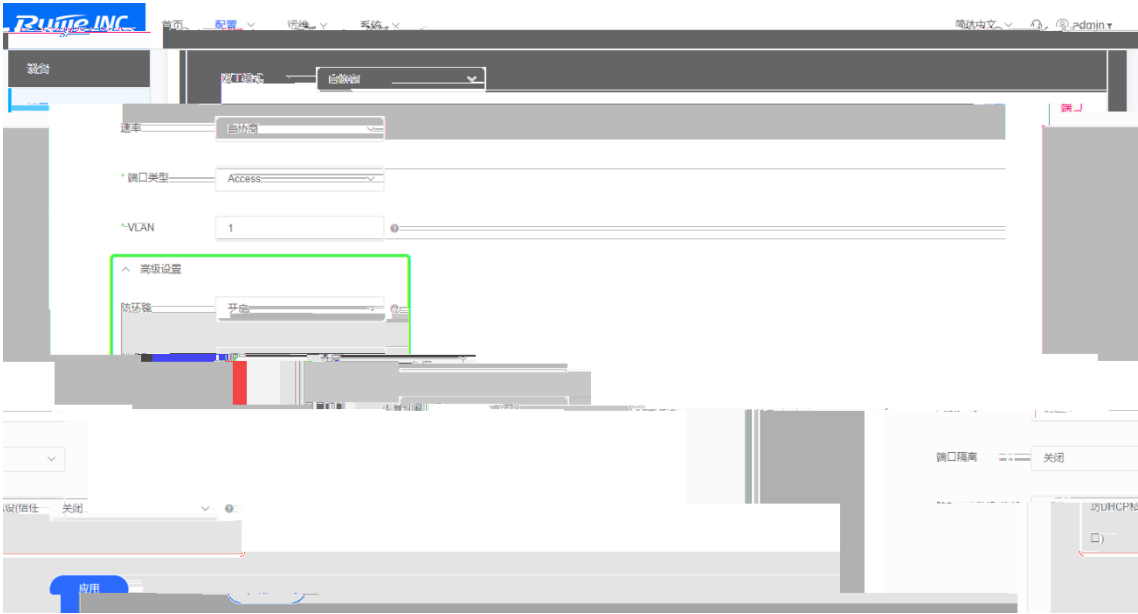


< >

VLAN

< >

a

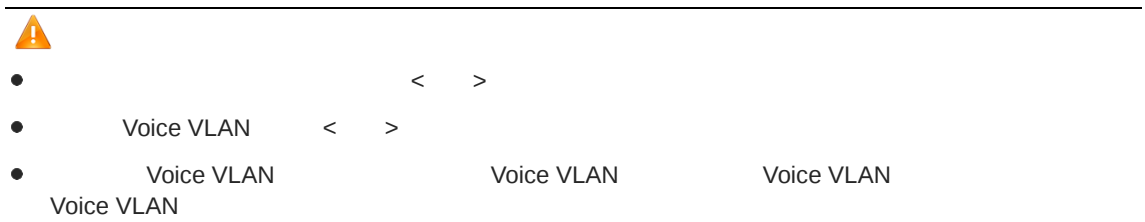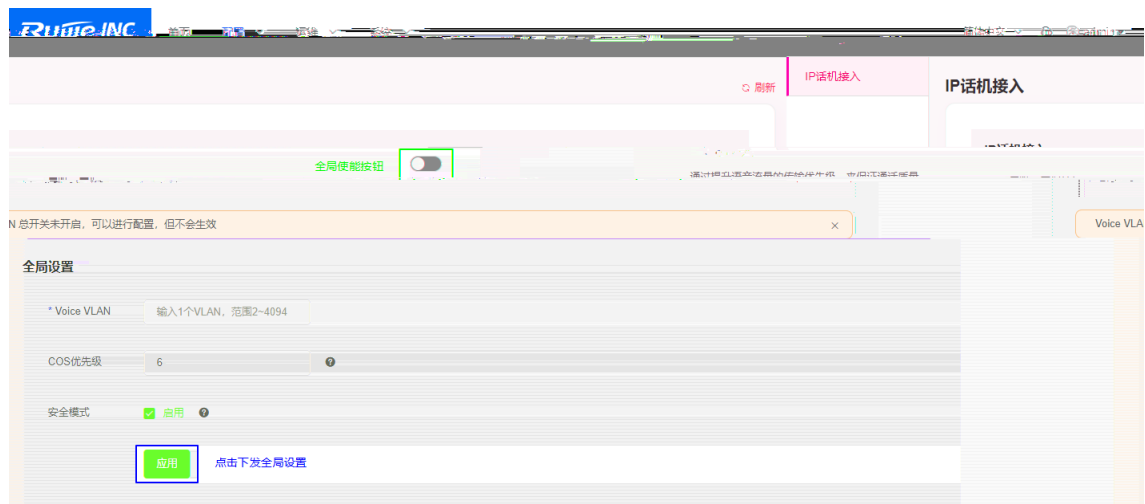



<

>

OUI

新增

×

2

* MAC

请输入，例：2222.2222.2222

清除

例：FFFFFFFF.0000

添加

描述

请输入

保存

取消



Mac

< >

OUI




C

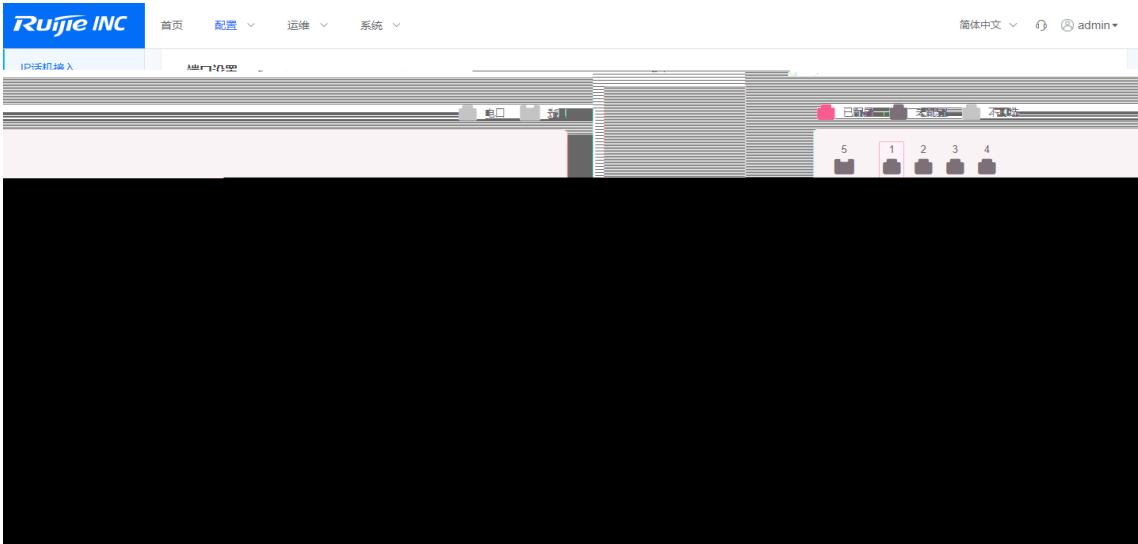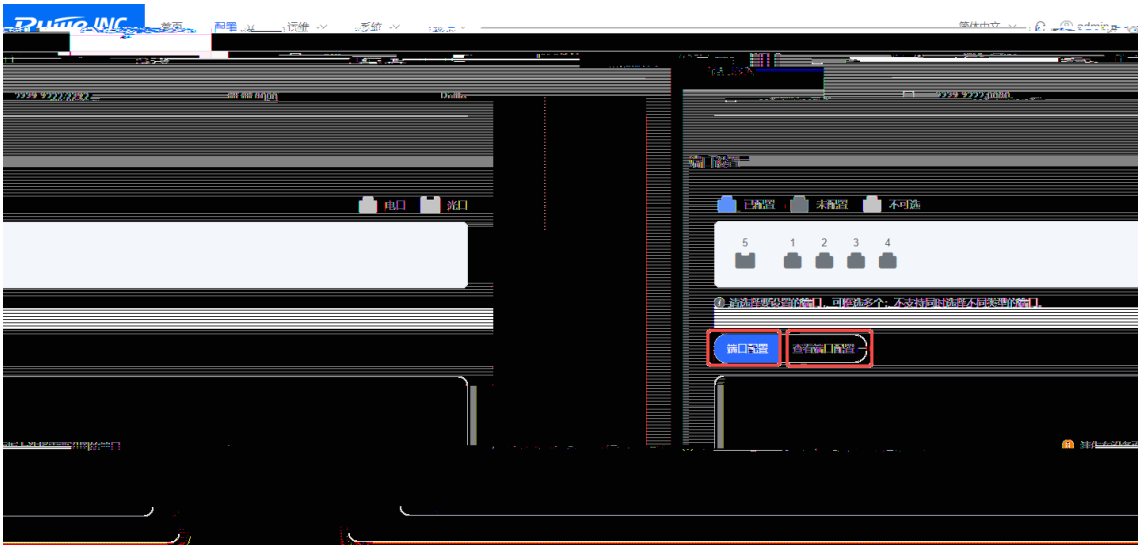

< >
< >

Voice VLAN LLDP-MED


< >

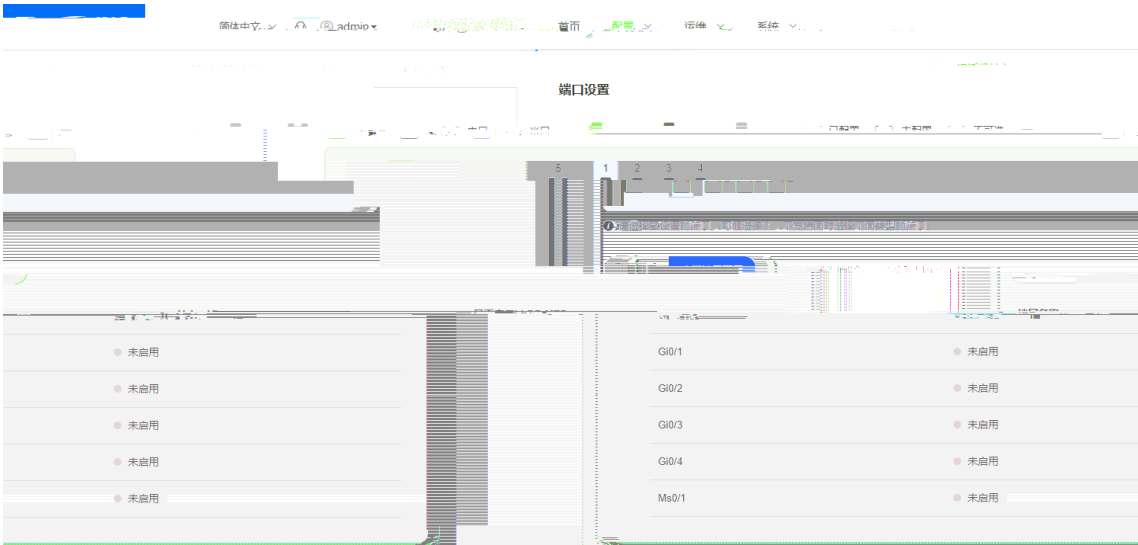


1.3.5

1.

(1) Ping

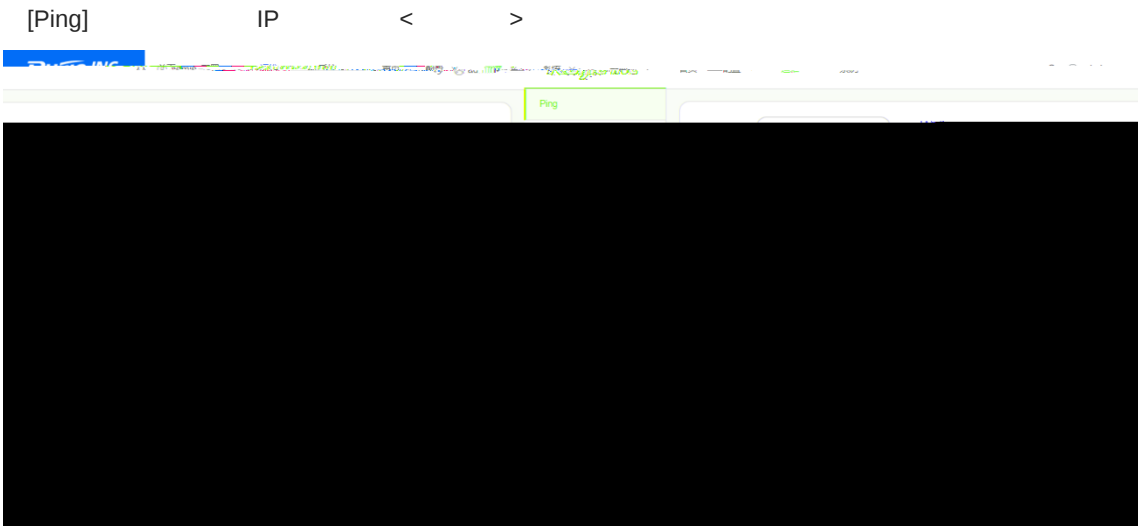

(2)

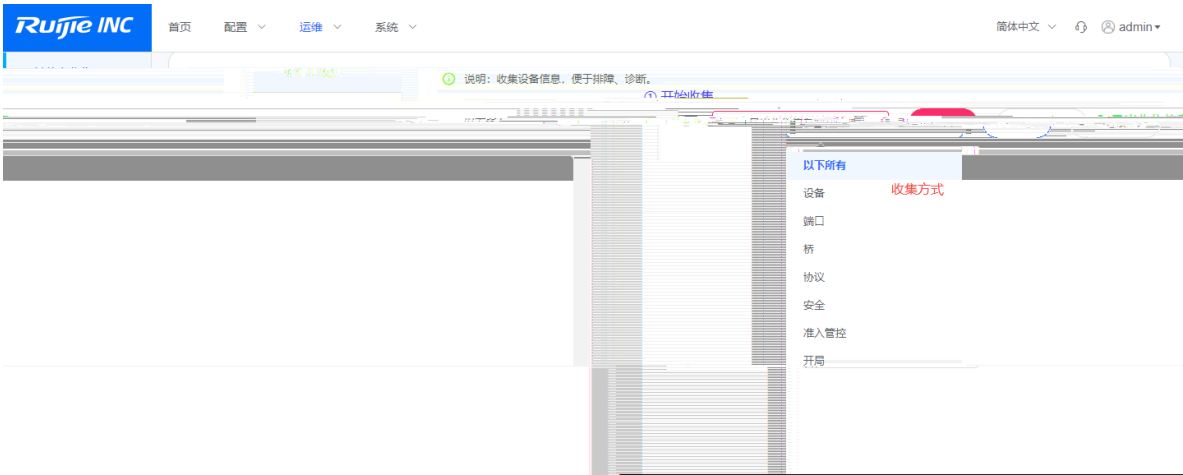

_20220118182247.txt

2.



(1)

< > 1



(2)


- 
- 
- - 2~3

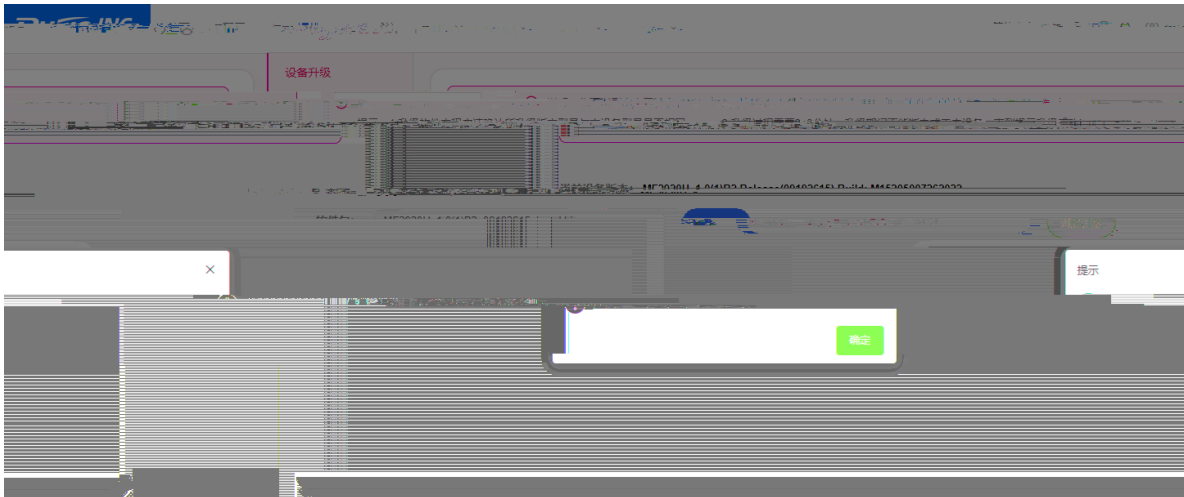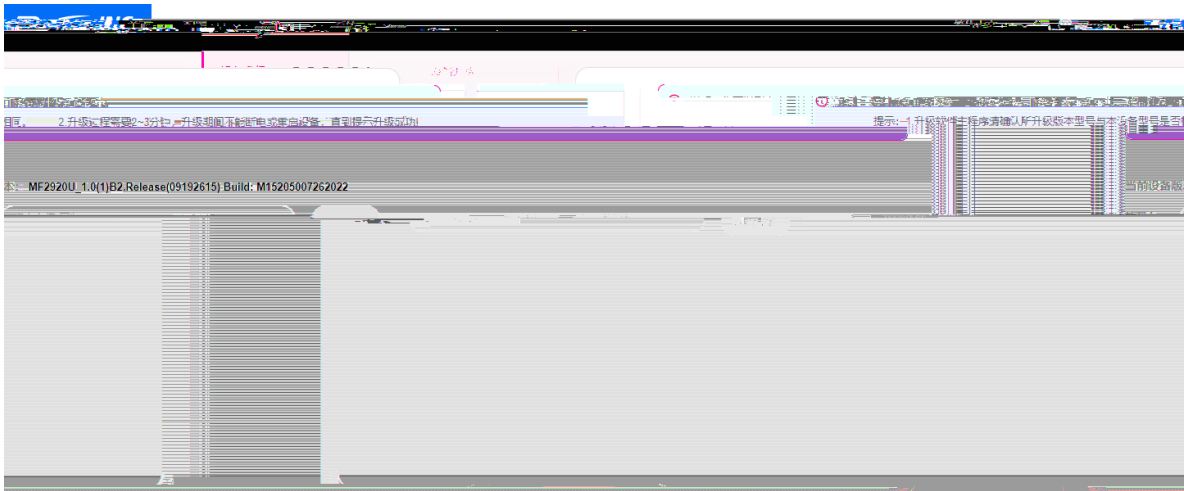

(3) Boot




Boot

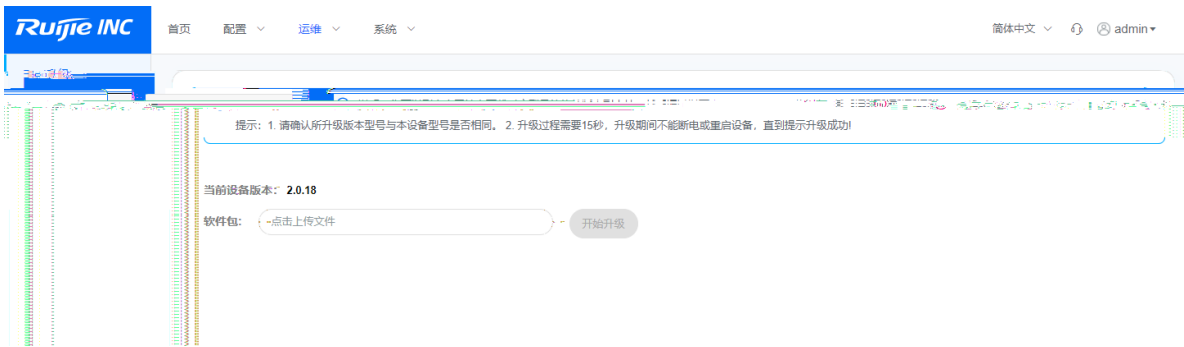


3.

(1)

a

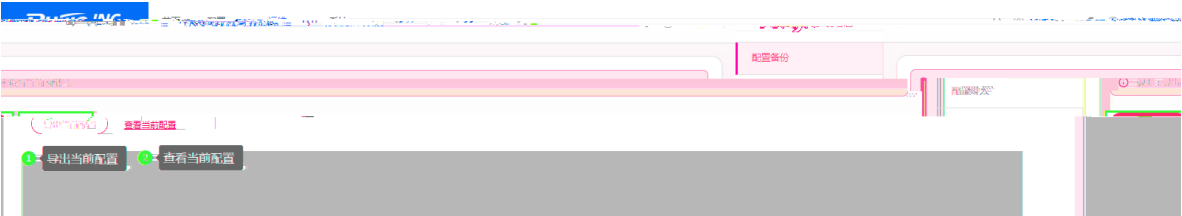

< > config.json

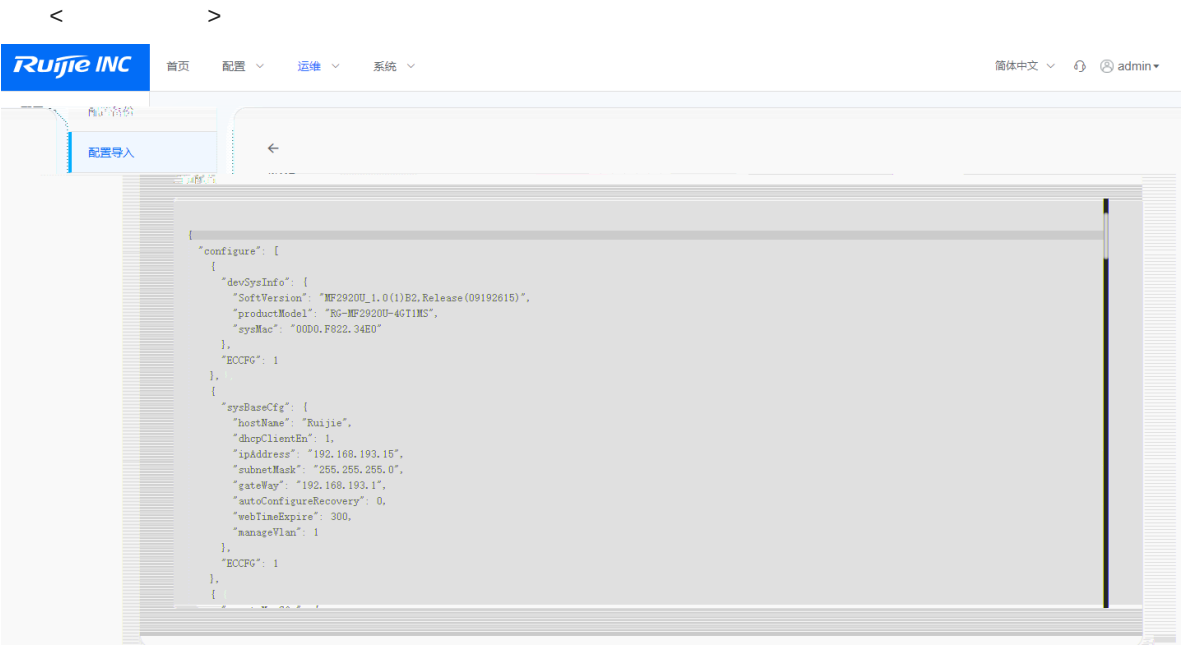

b



< > < >



< >

(2)



-
-

2-3

< >



2 CLI




2.1

“ Ruijie(diag)> ”

WEB

CLI




exit

2.2

CLI


reboot

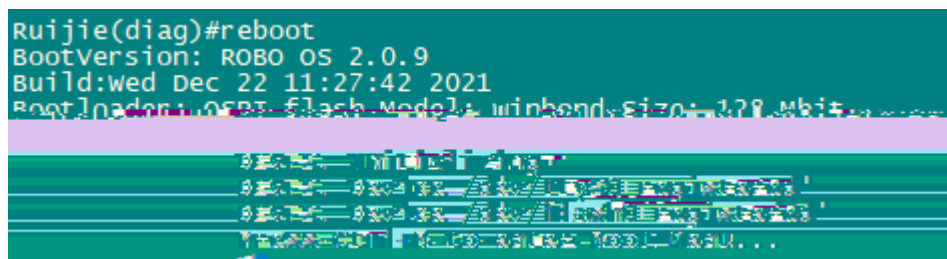

2.3

show_sys_info

```
Ruijie(diag)#show_sys_info
```

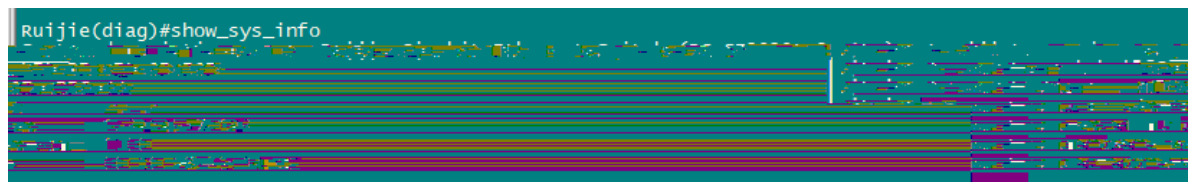

2-1 show_sys_info

System description	
System software version	
System software number	
System boot version	boot
System serial number	SN
System hardware version	
System mac address	mac

2.4 IP

IP ifconfig

```
Ruijie(diag)#ifconfig
```



2-2 ifconfig

IP Addr	IP
Network Mask	IP
Gateway IP	
Manage vlan	VLAN

2.5

cat

write

2.6 Ping

ping

ping