



copyright © 2023



- 
- 
- 

- <http://www.ruijie.com.cn>
- <http://www.ruijie.com.cn/fw/>
- 7\*24h <http://ocs.ruijie.com.cn>
- 7\*24h 4008-111-000
- —— <http://www.ruijie.com.cn/special/fw/tool/xryf/>
- 4008111000@ruijie.com.cn

APP

1.

| <> |  | < >      |
|----|--|----------|
| □  |  | “ ” [ ]  |
| >> |  | [ ]>>[ ] |

“

“ ”



/

3.

# 1 WEB


## 1.1

|                                                                                   |     |
|-----------------------------------------------------------------------------------|-----|
| WEB                                                                               | WEB |
| chrome                                                                            | WEB |
| <hr/>                                                                             |     |
|  | /   |
| <hr/>                                                                             |     |
| SF2920U                                                                           |     |
| <hr/>                                                                             |     |

## 1.2






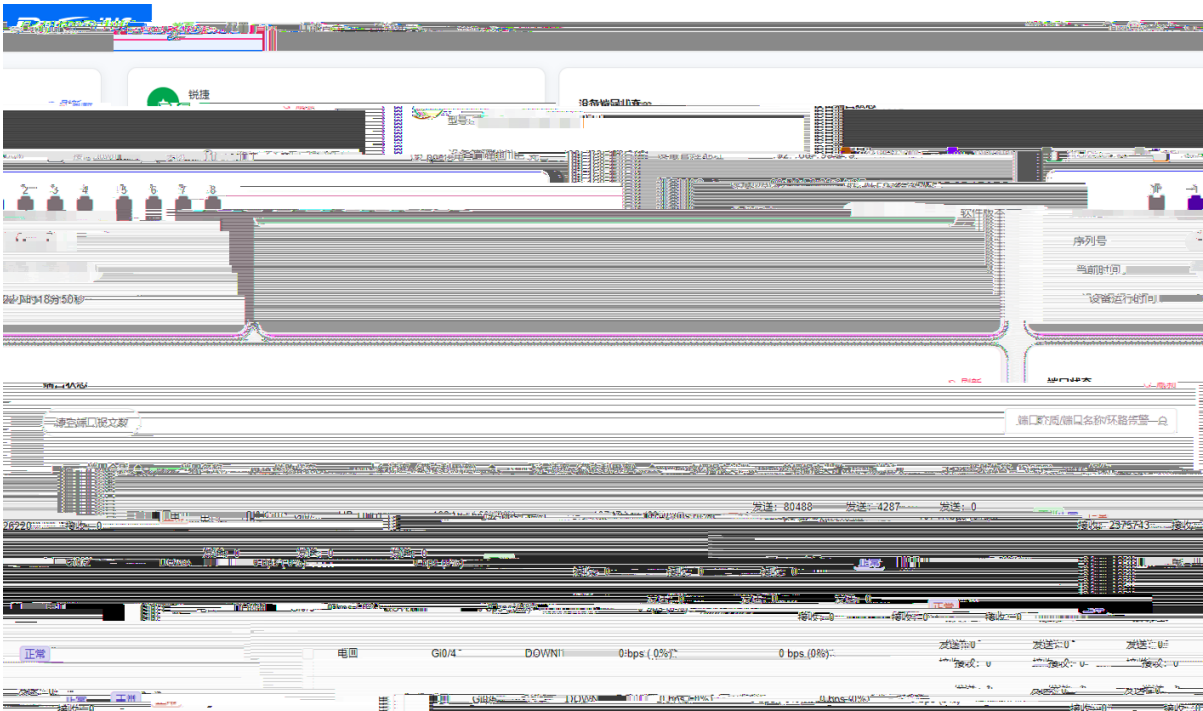

1.

WEB

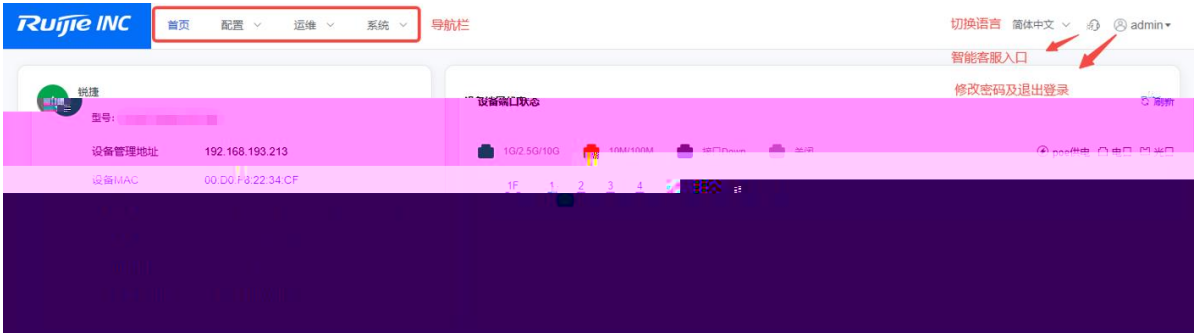

2.

WEB

1.3.3

1.

/

/

MAC

PoE

/



[                      ]                      <                      >

2.



●                      <                      >                      /

0

●                      <                      >

●                      /                      /

●                      DDM                      <DDM                      >                      DDM

|   |     |     |
|---|-----|-----|
| i | DDM | DDM |
|---|-----|-----|

3. POE /ARP

- POE  
[POE ] < > POE  
POE POE POE
- ARP  
[ARP ] < > ARP

1.3.4

1.  
(1) .

Ruijie INC

首页

配置

运维

系统

简体中文

admin

设备

配置

系统

日志

告警

帮助

端口

设备时间同步

时区 UTC+8 (北京, 中国标准时间)

管理VLAN 1

启用

NTP服务器ID

高级设置

连接超时时间 (秒) 3000

应用

!

IP


IP

IP

DHCP

IP

b







(2) IP  
a



- < >
- Voice VLAN < >
-



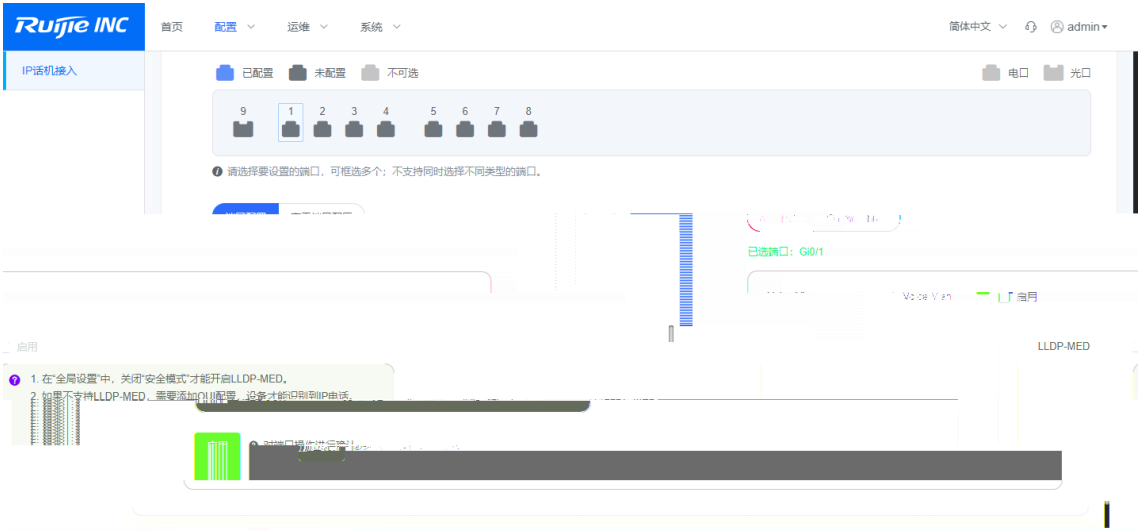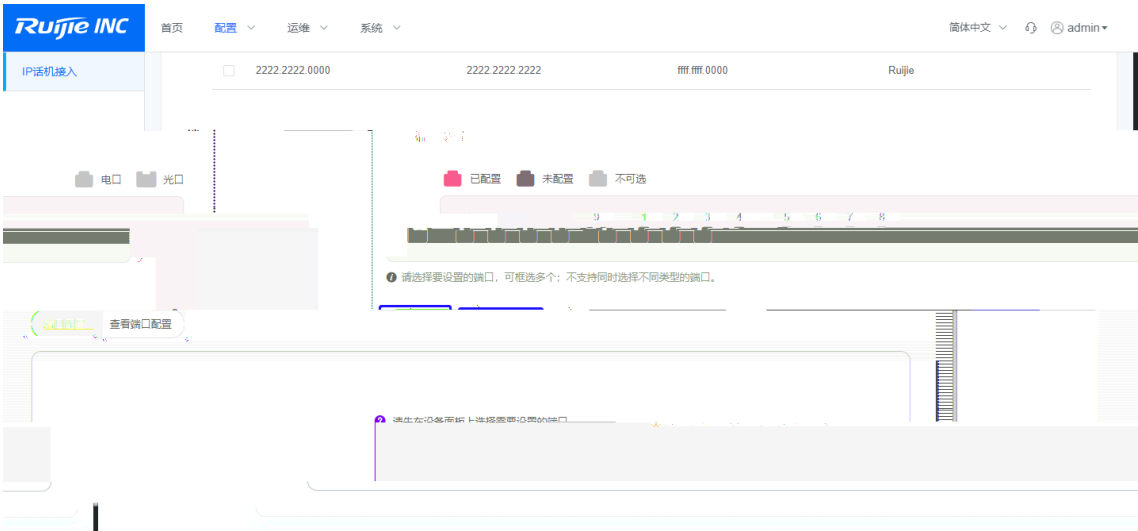

< >

Voice VLAN LLDP-MED

< >


< >

1.

[Ping]

[Ping]

IP

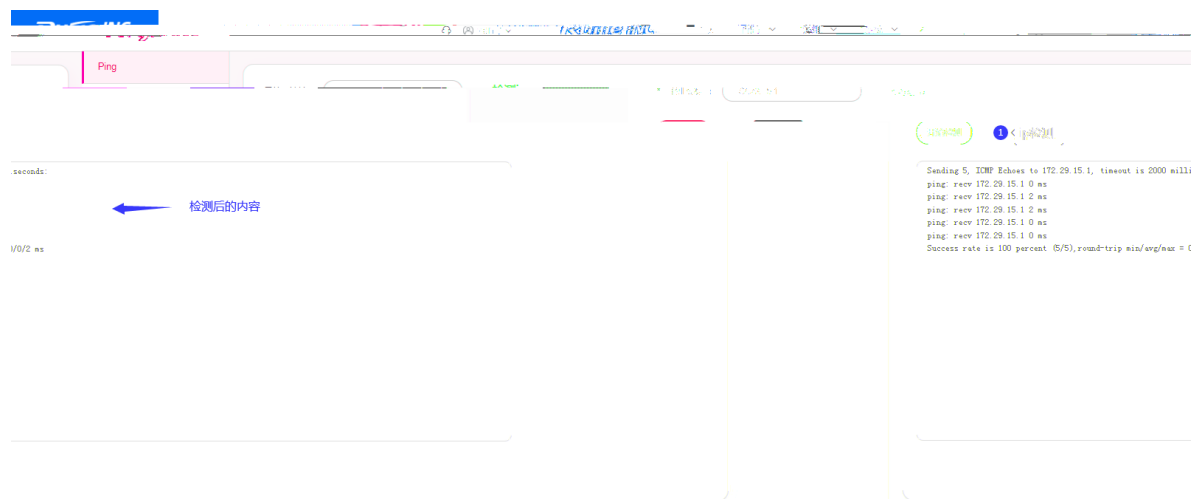 $\wedge$  $\succ$ 

(2)

\_20220118182247.txt

2.

(1)



<

>

1

(2)



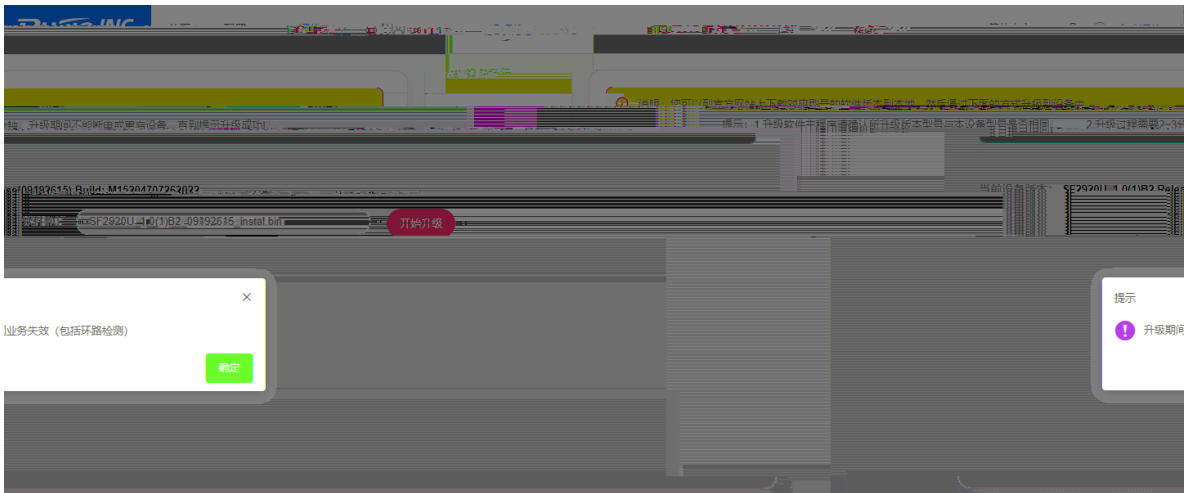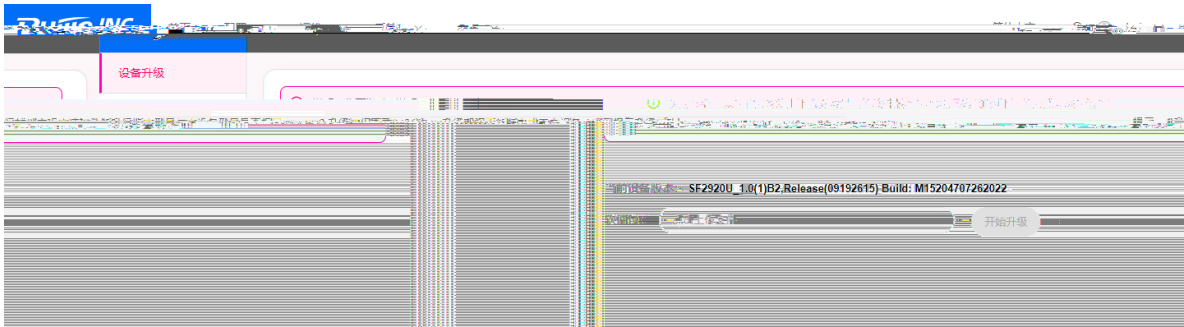

(3) Boot



Boot





<

>

(2)



!

2-3

<

>

config.json

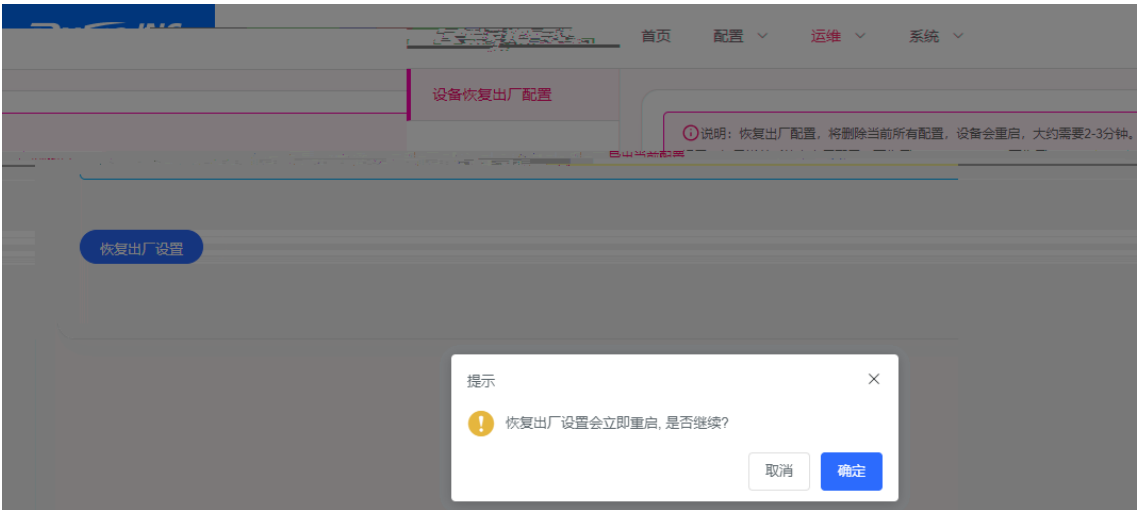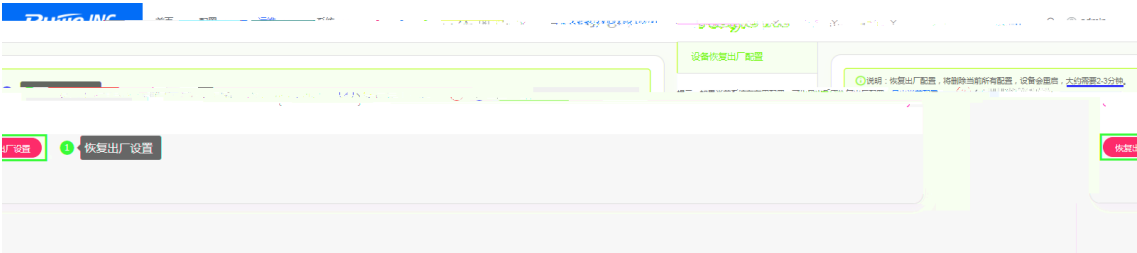

<

>

<

>

config.json

1.3.6

1.

(1)

[

]



**2-1 show\_sys\_info**

| System description      |      |
|-------------------------|------|
| System software version |      |
| System software number  |      |
| System boot version     | boot |
| System serial number    | SN   |
| System hardware version |      |
| System mac address      |      |

## 2.6 Ping

ping

**ping** *ip address*

---

