

copyright © 2025 i H ñ d5%4•|à] z "[-€o@€€DNM •`C €€s`bÔB@@ i•W•A@)-8L«-€o@€€yμUÖt€P<€€xÉ¥" £ G Ó ³ ¼G•wp

Ì ± ð Ãt%4•|à] z "[P6f zÆ 1 ±C } Æ P b± °Ðπ}<wÀ,Uã π i z^ Ó Å GÓÄ1 æ+óÇää?" + Ë\$ρ,ÅœHP6°à•ðày€€YS(A'ã±"

<https://www.ruijie.com.cn>

<https://www.ruijie.com.cn/fw/>

<https://wind.ruijie.com.cn/>

7*24h

<https://ocs.ruijie.com.cn>

7*24h

4008-111-000

--

<https://www.ruijie.com.cn/special/fw/tool/xryf/>






4008111000@ruijie.com.cn

doc@ruijie.com.cn



APP

1.





/

2.

1.2

RG-CT1120

1-2 RG-CT1120

- (1) LED
- (2) **USB 3.0** 4 USB3.0 USB3.0 U
USB2.0
- (3) 4
- (4)
- (5) **CMOS** CMOS CMOS
- (6) **USB 2.0** 2 USB2.0 USB2.0
- (7) 10M/100M/1000M
- (8) **HDMI** HDMI
- (9) 12V-4A
- (10) Kensington

1.3

1-2 RG-CT1120

	RG-CT1120
	VDI
	RG-CT1120
CPU	Intel jasper lake 4 4 2.0GHz

â

	1*32GB eMMC
	RG-CT1120
	1 DC 1 3.5mm 4 1 3.5mm 1 10M/100M/1000M 4 USB3.0 2 USB2.0 2 HDMI
Wi-Fi	Wi-Fi 802.11ax Wi-Fi 6
	Wi-Fi 5.2 802.11ax Wi-Fi 6
	RG-CT1120
x x	147mm×147mm×32.5mm
	0.6kg
	1.2kg
	Kensington
	RG-CT1120
	1
	DC 12V DC 4A
	10W
	RG-CT1120

0°C 40°C
-40°C 70°C
3000 ~5000

3

3.1


3.1.1



(1) " LOCK"

M4

3-1

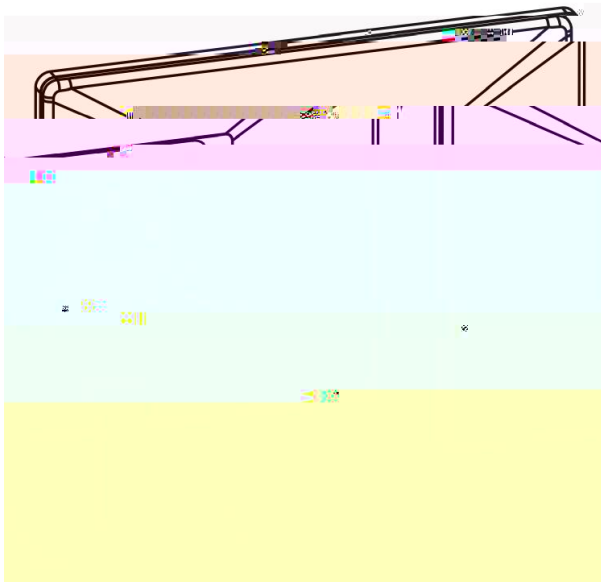


(2)

4

4

3-4

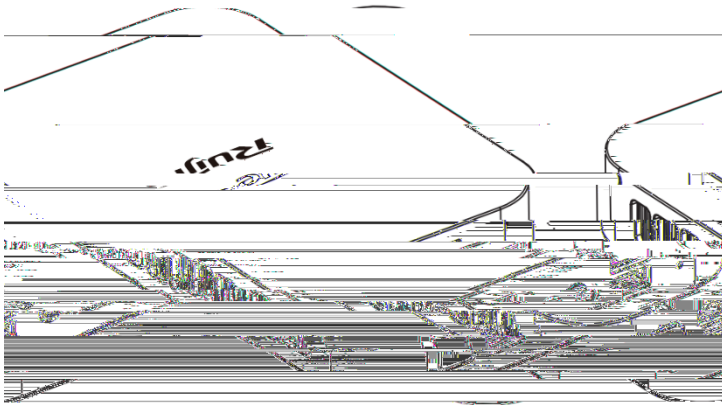


3.2


HDMI

3-5

HDMI

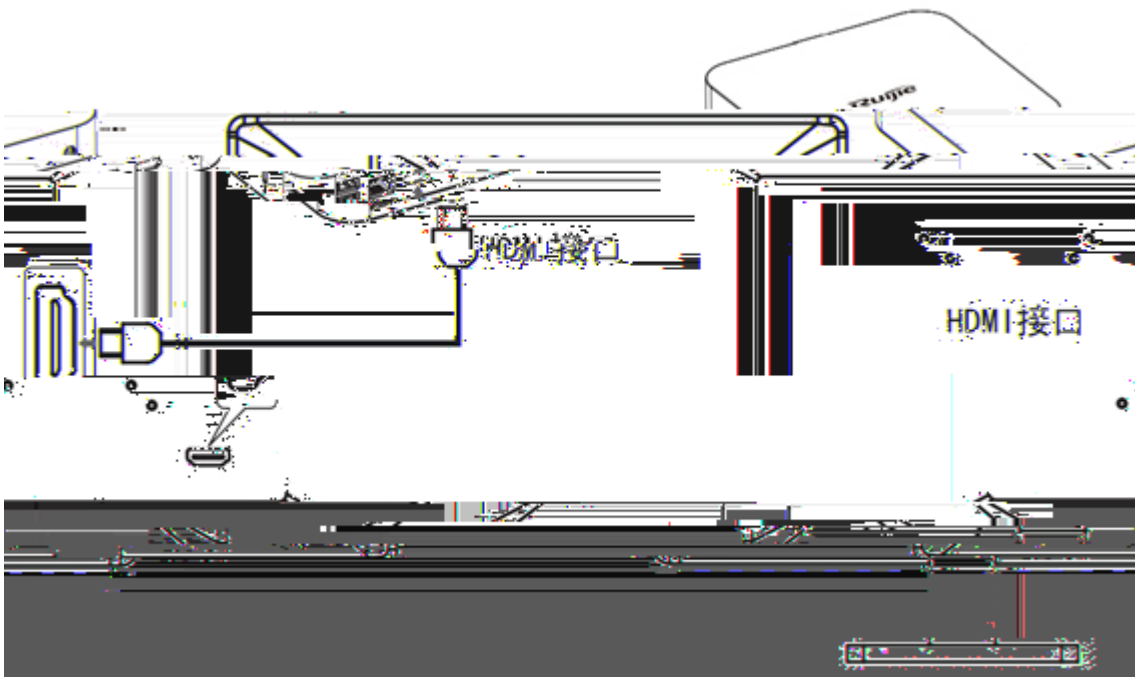


3-6

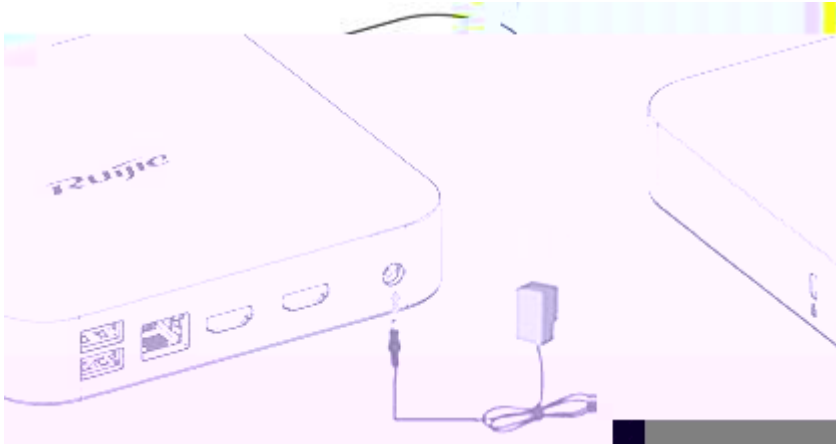

3.3

3-7

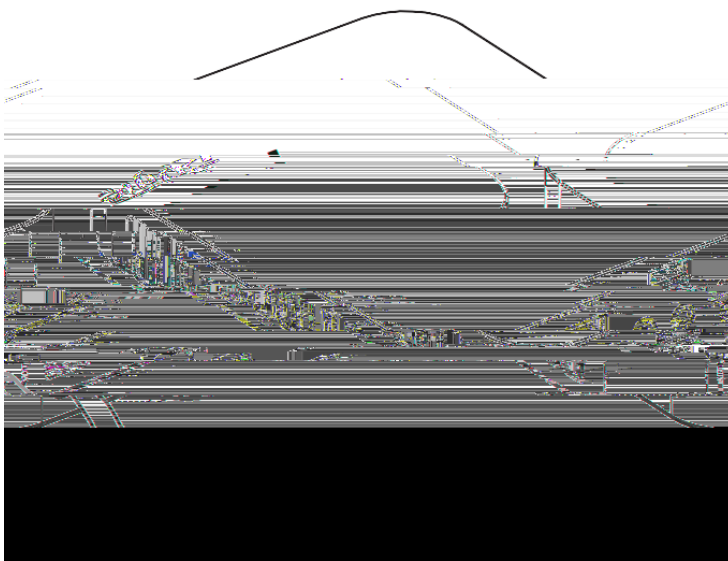

4

4.1

0 ~40

4.2

/

180V~240V

I

USB

Type-C

USB

15W

USB

4.3

4.4

4.5

4.6

9

24

120/240V 20A

	×					
"	×					
	×					
	×					
						¼