

RG-SF2920U

SF2920U_1.0(1)B6 WEB

V1.0

2024-04-29

copyright © 2024

copyright © 2024



-
-
-

-
-
-
-
-
-

<http://www.ruijie.com.cn>
<http://www.ruijie.com.cn/fw/>
<http://ocs.ruijie.com.cn>
4008-111-000
<http://www.ruijie.com.cn/special/fw/tool/xryf/>
4008111000@ruijie.com.cn

APP

1.

--	--	--

1

1



/


3.

1 WEB

1.1

ÑÑ WEB 63.67 <n-US n-US WEB



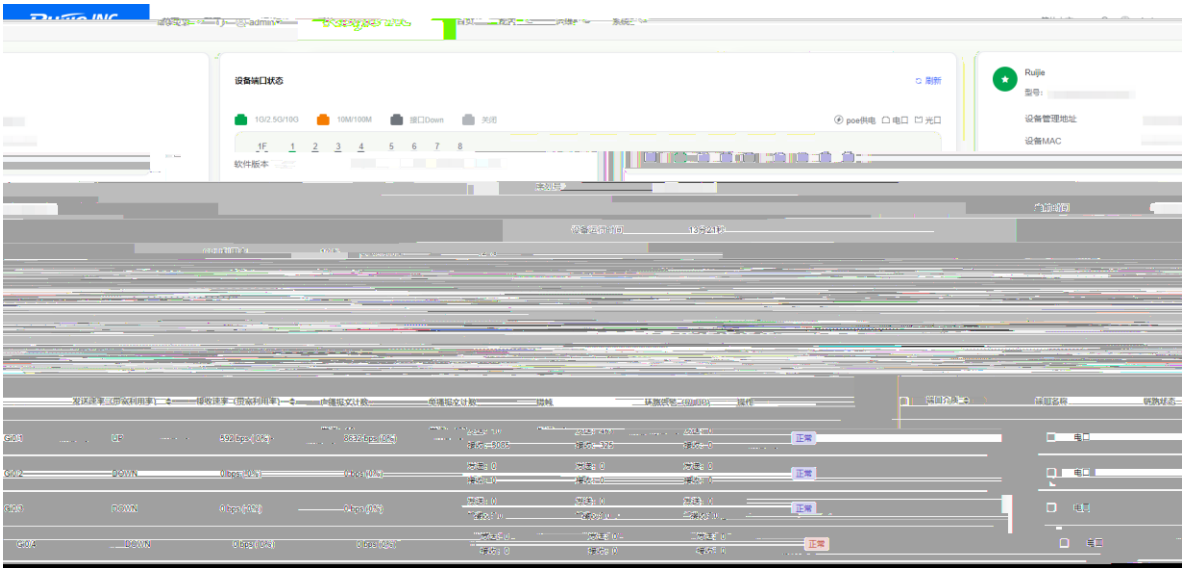

1.

WEB



2.

WEB

1.3.3

1.

/

/

MAC

PoE

/

•

[

]

<

>

— [REDACTED]

2.

•

3. POE /ARP

MAC地址	端口
0000.1822.3309	G0/0/2

总功率: 126 W 剩余功率: 126 W

端口	POE开关设置	供电状态	供电功率
G0/0/1	开启	关闭	0
G0/0/2	开启	关闭	0
G0/0/3	开启	关闭	0
G0/0/4	开启	关闭	0
G0/0/5	开启	关闭	0

共 9 条

IP地址
172.29.15.1

共 1 条

● POE

[POE] < > POE

POE POE POE

● ARP


[ARP] < > ARP


1.3.4

1.

(1)


a

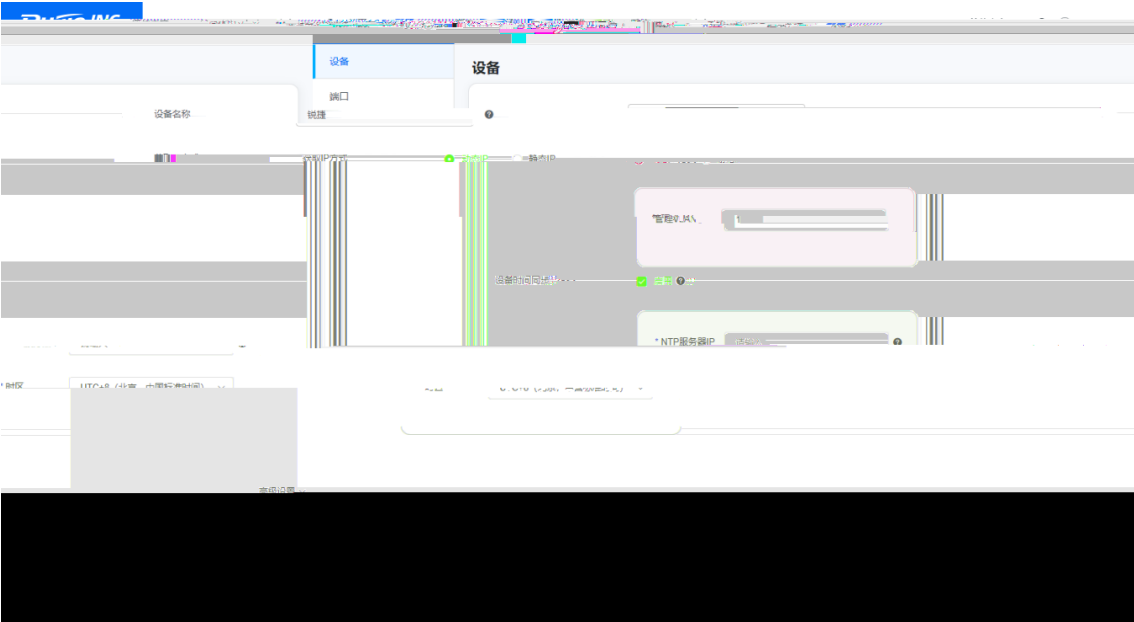

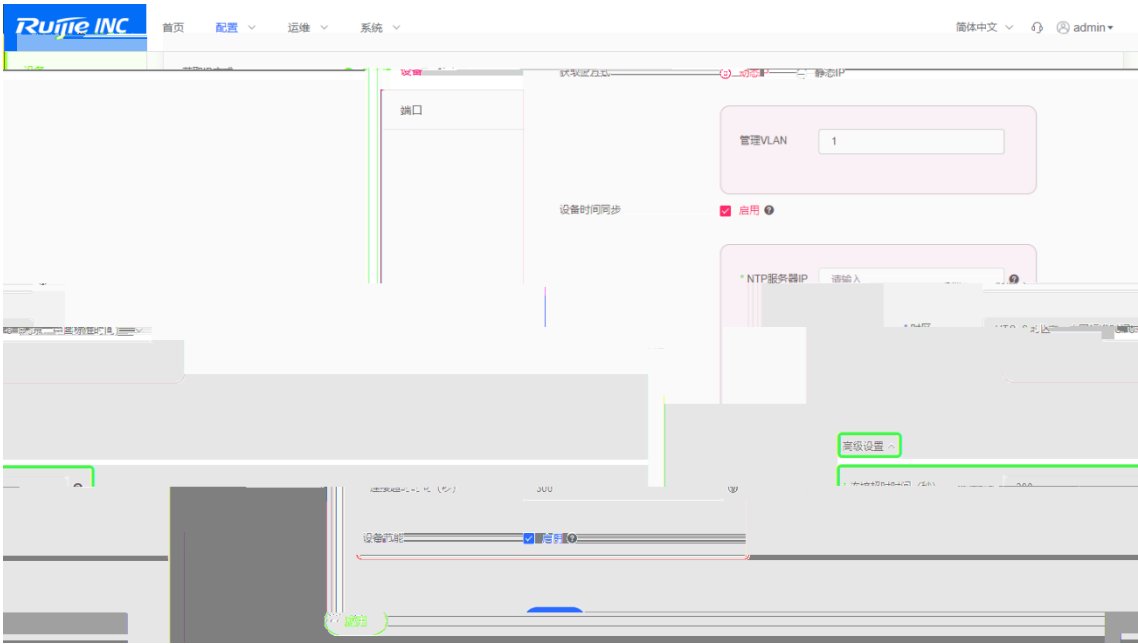


! IP IP IP DHCP IP

b

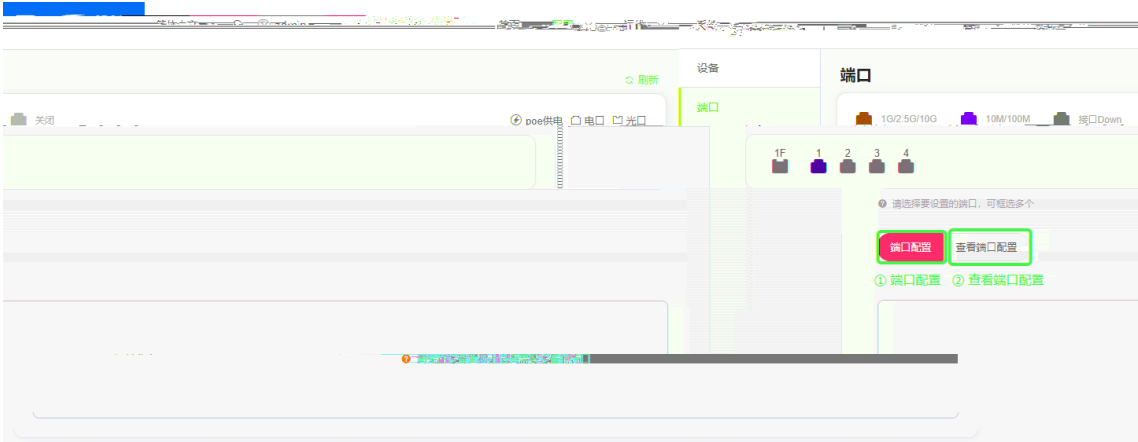



< >

< >

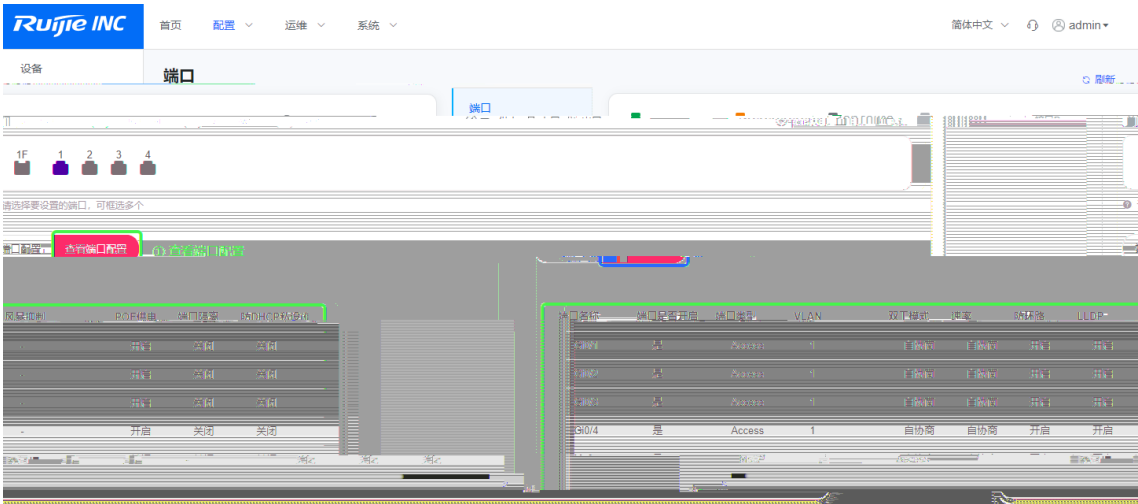

(2) IP



a

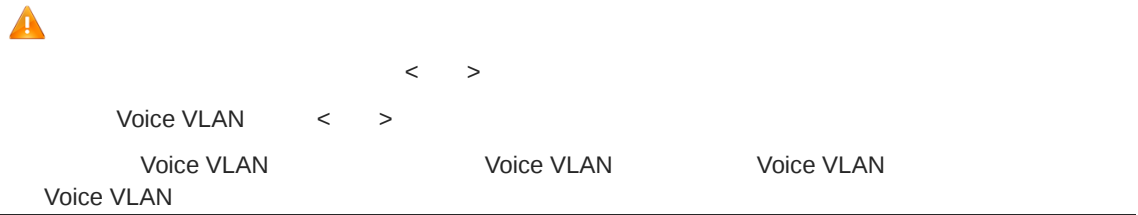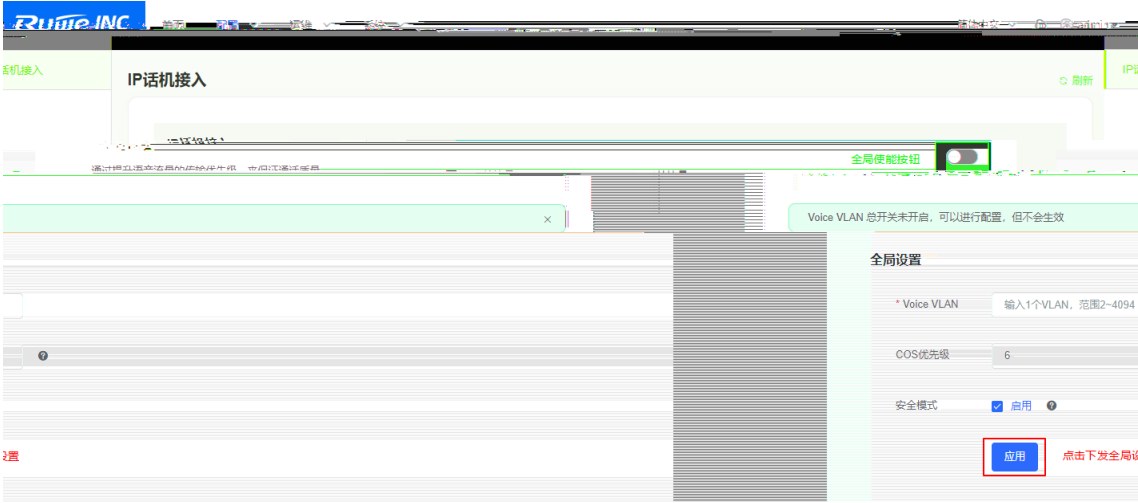

b OUI




C

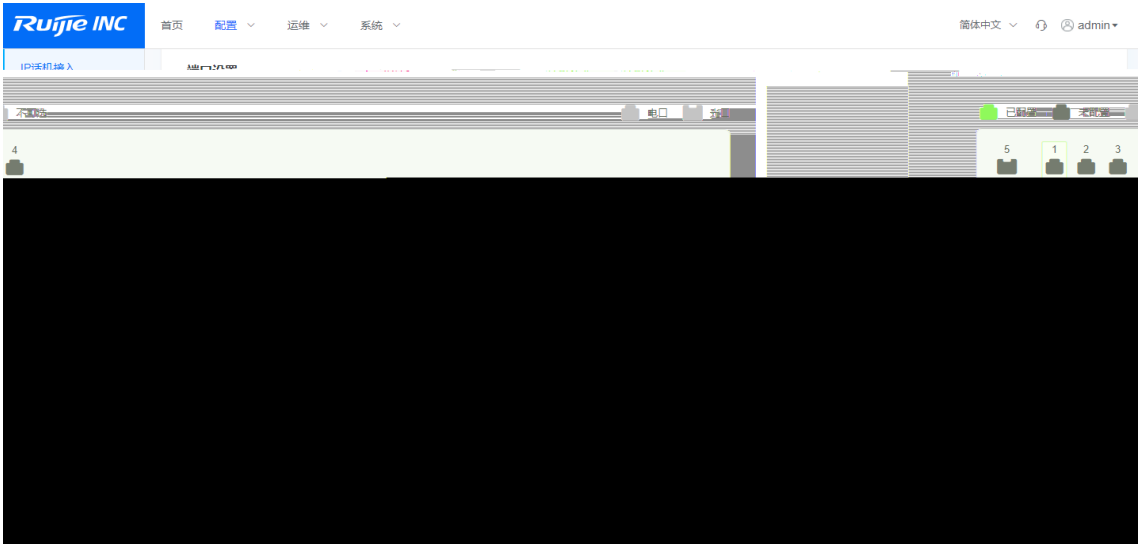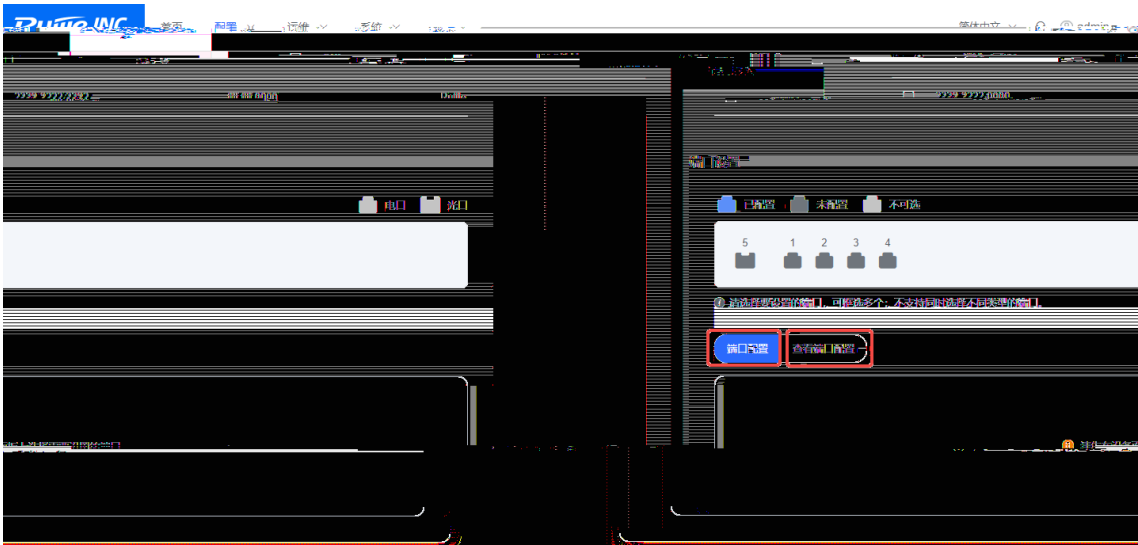

< >
< >

Voice VLAN LLDP-MED


< >

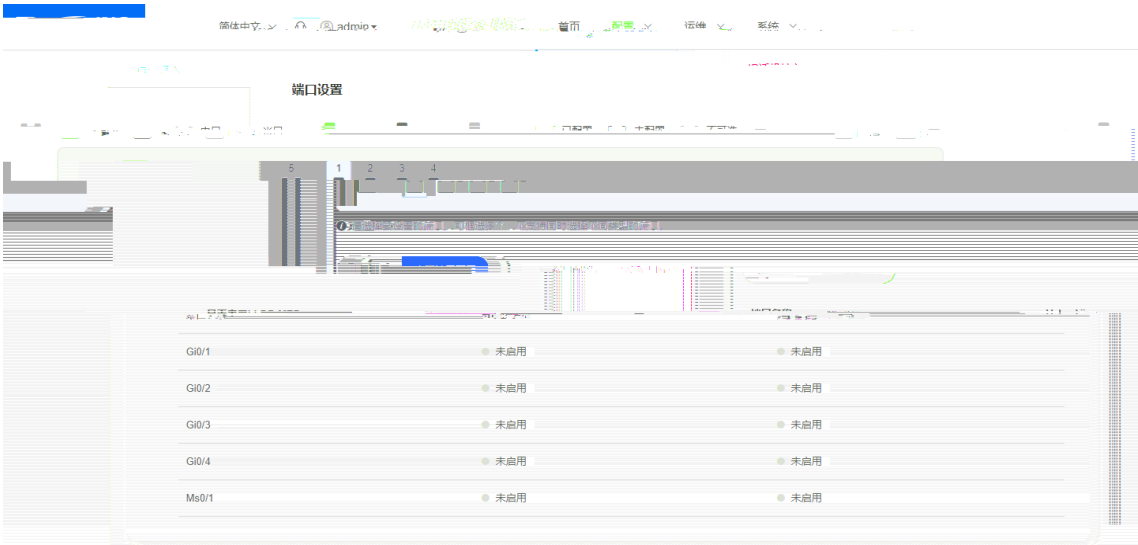

1.3.5


1.

(1) Ping

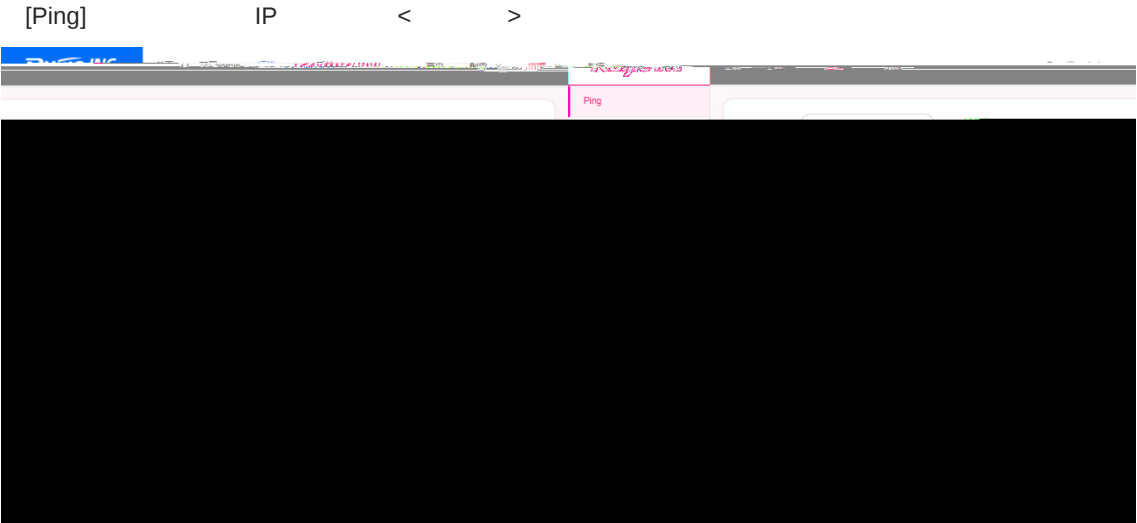


(2) Tracert



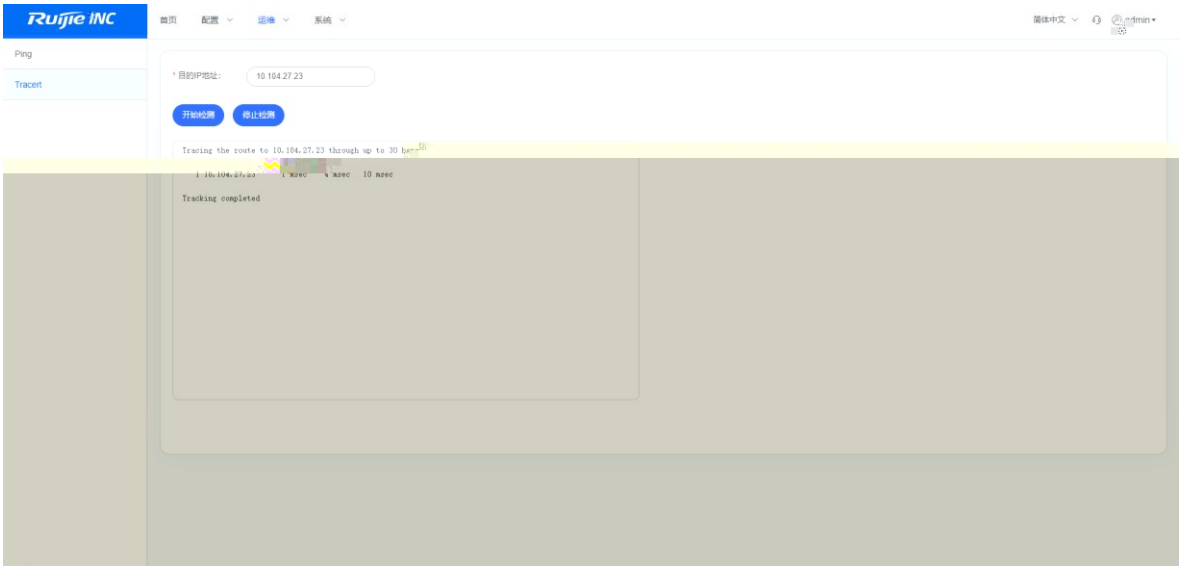

(3)

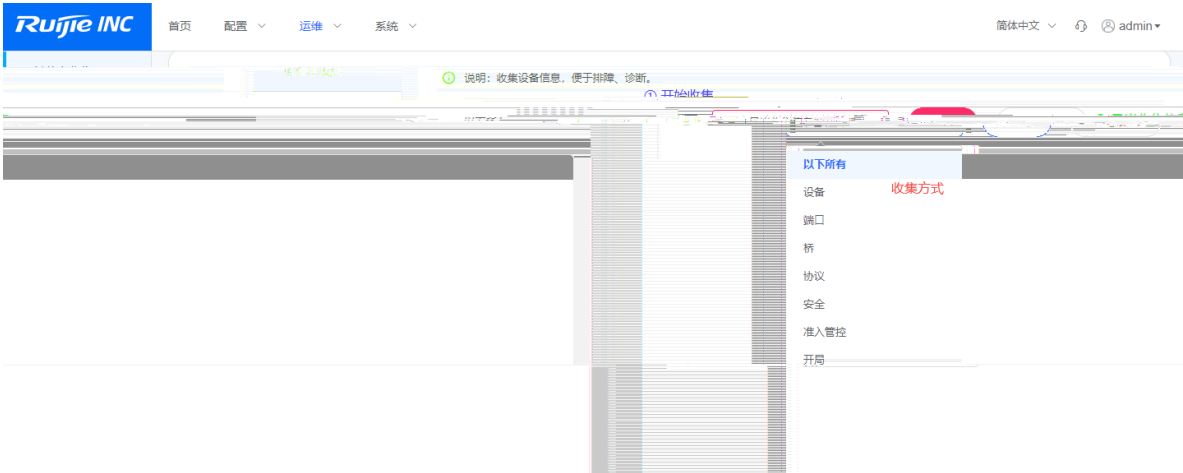

_20220118182247.txt

2.



(1)



(2)




2~3

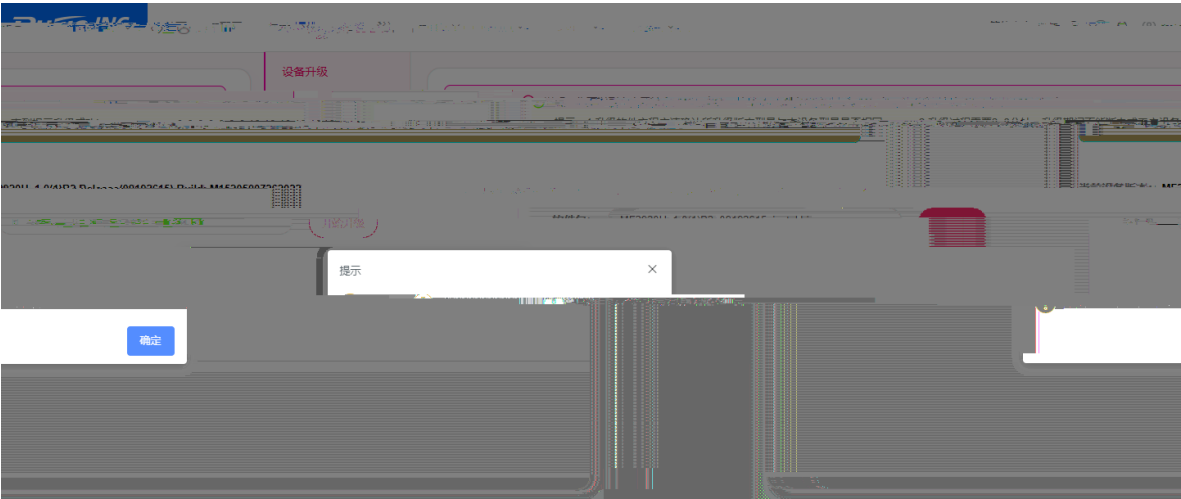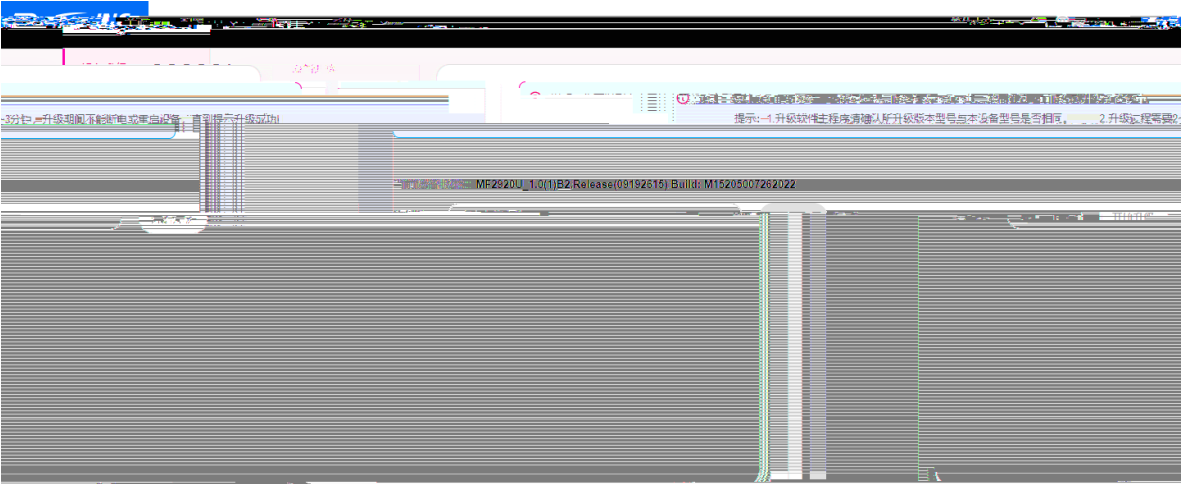

(3) Boot




Boot

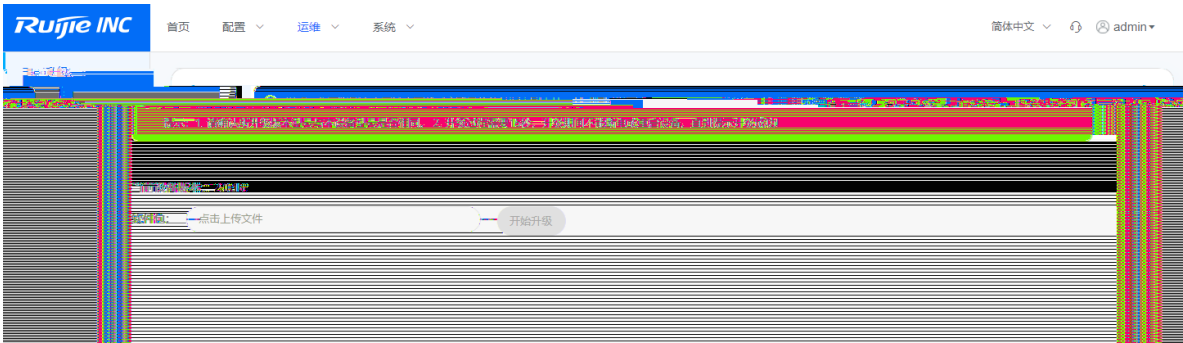

3.


(1)

a

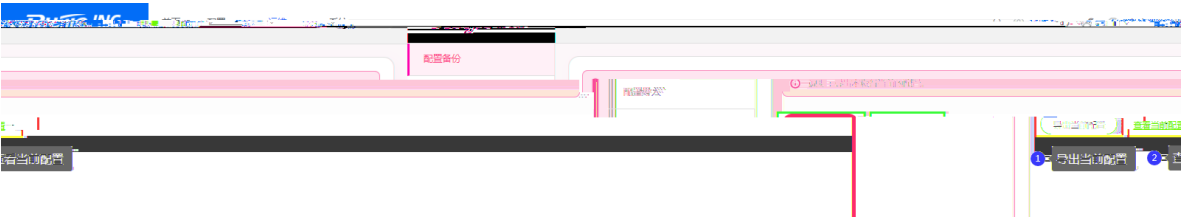

< > config.json

< >

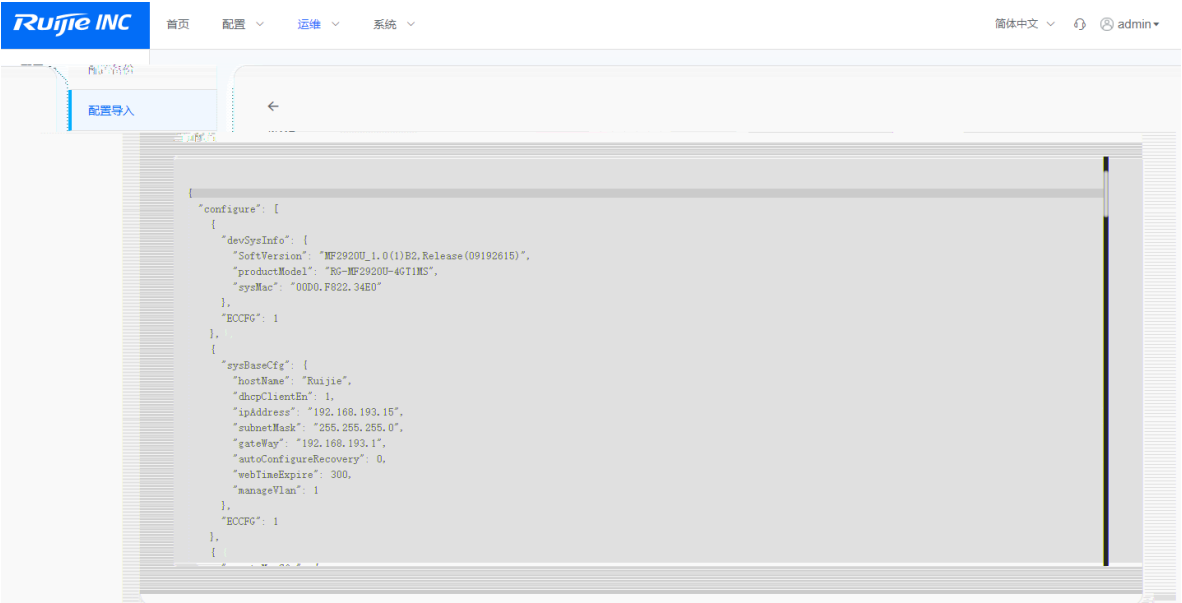

b

< > < >



< >

(2)
 Å _____

< >

•

< > config.json

1.3.6

1.

(1)

[]



2 CLI




CLI

2.1

Ruijie(diag)>

WEB

CLI



exit

2.2

CLI

reboot

2.3

show_sys_info

2-1 show_sys_info

System description	
System software version	
System software number	
System boot version	boot
System serial number	SN
System hardware version	
System mac address	mac

2.4 IP

IP ifconfig

2-2 ifconfig

--	--

Network Mask	IP
Gateway IP	
Manage vlan	VLAN

2.5

cat

write

```
Ruijie(diag)#cat 1:system/config.jsn
{"configure":{"devSysInfo":{"softVersion":"2920U_1.0(1)B1_09131915","productModel":"RG-SF2920U-8GT1MS","sysMac":"00D0.F822.34CE"},"ECCFG":
{"192.168.193.104","subnetMask":"255.255.255.0","gateway":"192.168.193.1","autoConfigureRecovery":0,"webTimeExpire":300,"manageVlan":1},"
...
Ruijie(diag)#write
```

2.6 Ping

ping

ping



ping ip

ping

```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```

2.7 Tracert

tracert

tracert



tracert ip

tracert

30

```
Ruijie(diag)#tracert 10.104.27.23
Tracing the route to 10.104.27.23 through up to
30 hops
  1 10.104.27.23      23 msec  100% success 100%
Ruijie(diag)#
```