



**RG-S3760**

**RGOS 10.3(5b1)**

©2000-2010



# RGOS®10.3(5b1)

- 
- 
- 

**1.**

5

---

---

Courier New

5

**2.**

Arial

[ ] [ ]

{x|y|...}

[x|y|...]

//

**3.**

r



1)

2)

3)

---

# 1 CLI

## 1.1 alias

alias

no

**alias** *mode command-alias original-command*  
**no alias** *mode [command-alias]*

*mode*  
*command-alias*  
*original-command*

EXEC

EXEC

<b>h</b>	<b>help</b>
<b>p</b>	<b>ping</b>
<b>s</b>	<b>show</b>
<b>u</b>	<b>undebug</b>
<b>un</b>	<b>undebug</b>

**no alias exec**

**alias ?**

Ruijie(config)# **alias ?**

---

```

aaa-gs          AAA server group mode
acl             acl configure mode
bgp            Configure bgp Protocol
config         globle configure mode

```

\*

*\*command-alias=original-command*

```

EXEC           "s"   "show"           "s?"
's'

```

Ruijie# **s?**

\*s=show show start-chat start-terminal-service

```

EXEC           "sv"   "show version"

```

Ruijie# **s?**

\*s=show \*sv="show version" show start-chat  
start-terminal-service

Ruijie# **s?**

show start-chat start-terminal-service

```

"ia"   "ip address"

```

Ruijie(config-if)# **ia ?**

A.B.C.D IP address

dhcp IP Address via DHCP

Ruijie(config-if)# **ip address**

```

"ip address"

```

### show aliases

```

"def-route"

```

```

"ip route 0.0.0.0 0.0.0.0 192.168.1.1"

```

Ruijie# **configure terminal**

Ruijie(config)# **alias config** def-route ip route 0.0.0.0  
0.0.0.0 192.168.1.1

Ruijie(config)# **def-route?**

\*def-route="ip route 0.0.0.0 0.0.0.0 192.168.1.1"

```
Ruijie(config)# def-route?
% Unrecognized command.
Ruijie(config)# end
Ruijie# show aliases config
globe configure mode alias:
def-route                ip route 0.0.0.0 0.0.0.0
192.168.1.1
```

<b>show aliases</b>	

## 1.2 privilege

**privilege** **no**

**privilege** *mode* [**all**] {**level** *level* | **reset**} *command-string*  
**no privilege** *mode* [**all**] [**level** *level*] *command-string*

*mode* CLI

[**all**]

**level** *level* 0-15

**reset**

*command-string*

**privilege** CLI

**privilege ?** CLI

<b>config</b>	

<b>exec</b>	
<b>interface</b>	
<b>ip-dhcp-pool</b>	DHCP
<b>keychain</b>	KeyChain
<b>keychain-key</b>	KeyChain-key
<b>time-range</b>	Time-Range

CLI 1 "test" reload

```
Ruijie(config)# enable secret level 1 0 test
Ruijie(config)# privilege exec level 1 reload
```

1 CLI reload

```
Ruijie> reload ?
<cr>
```

reload 1 all

```
Ruijie(config)# privilege exec all level 1 reload
```

1 CLI reload

```
Ruijie> reload ?
at reload at a specific time/date
cancel cancel pending reload scheme
in reload after a time interval
<cr>
```

<b>enable secret</b>	CLI

### 1.3 show aliases

EXEC

**show aliases**

**show aliases [mode]**

---

mode

EXEC

EXEC

Ruijie# **show aliases exec**

exec mode alias:

h	help
p	ping
s	show
u	undebug
un	undebug

<b>alias</b>	

---

# 2

## 2.1

CLI

- **disable**
- **enable**
- **enable password**
- **enable secret**
- **password**
- **login**
- **login local**
- **login authentication**
- **username**
- **lock**
- **lockable**
- **telnet**
- **ip telnet source-interface**
- **enable service**

### 2.1.1 disable

disable

**disable** [ *privilege-level* ]

*privilege-level*



---

**disable**

Ruijie# **disable** 10



---

r

EXEC

---

pw10

Ruijie(config)# **enable password** pw10

<b>enable secret</b>	

## 2.1.4 enable secret

**enable secret**

**no**

**enable secret** [level *level*] {*secret* | [0 | 5] *encrypted-secret*}

**no enable secret**

*Secret* EXEC  
*Level*  
**0|5** 0 5  
*encrypted-password*

password security password  
15 security 0 15  
password  
15 password  
security 15 password security  
password  
security

---

pw10

---

```
password          line
0|7              0      7
encrypted-password
```

```
line
```

```
line
```

```
line          red
```

```
Ruijie(config)# line vty 0
Ruijie(config-line)# password red
```

login	

## 2.1.7 login

```
AAA
```

```
login          no
```

```
login
```

```
no login
```

```
line
```

```
AAA
```

```
VTY console
```

```
VTY
```

```
Ruijie(config)# no aaa new-model
Ruijie(config)# line vty 0
Ruijie(config-line)# password 0 normatest
```

---

```
Ruijie(config-line)# login
```

<b>password</b>	line

## 2.1.8 login local

```
AAA
```

```
login local no
```

```
login local
```

```
no login local
```

```
line
```

```
AAA
```

```
username
```

```
VTY
```

```
Ruijie(config)# no aaa new-model
```

```
Ruijie(config)# username test password 0 test
```

```
Ruijie(config)# line vty 0
```

```
Ruijie(config-line)# login local
```

---

**default**

*list-name*

line

AAA

VTY

radius

```
Ruijie(config)# aaa new-model
Ruijie(config)# aaa authentication login default radius
Ruijie(config)# line vty 0
Ruijie(config-line)# login authentication default
```

<b>aaa new-model</b>	AAA
<b>aaa authentication login</b>	

## 2.1.10 username

username

**username** *name* {**nopassword** | **password** { *password* | [0|7]  
*encrypted-password* }}

**username** *name* **privilege** *privilege-level*

**no username** *name*

*name*

*password*

**0|7**

0

7

*encrypted-password*

*privilege-level*

---

r

7

7

7

15

Ruijie(config)# **username test privilege 15 password 0**  
*pw15*

---

line

**lockable**

line

```
Ruijie(config-line)# lockable
Ruijie(config-line)# end
Ruijie# lock
Password: <password>
Again: <password>
Locked
Password: <password>
Ruijie#
```

<b>lockable</b>	

## 2.1.12 lockable

**lock** G!5B6

lockable

```

Again: <password>
Locked
Password: <password>
Ruijie#

```

<b>lock</b>	

## 2.1.13 telnet

```

telnet EXEC
telnet
telnet host [port] [keyword]

```

```

Host IP
Port TCP 23
Keyword

```

<b>/source-interface</b>	telnet
<b>/vrf</b>	VRF

telnet

```

telnet 192.168.1.11
vlan 1 VRF vpn1
Ruijie# telnet 192.168.1.11 /source-interface vlan 1
/vrf vpn1

```

--	--

---

<b>Show session</b>	TTY
<b>exit</b>	

---

<b>telnet-server</b>	Telnet Server
<b>web-server</b>	Http Server
<b>snmp-agent</b>	Snmp Agent

**no enable service**

**enable service ssh-server,      SSH Server**

Ruijie(Config # **enable service ssh-server**



**show service**

---

**clock set**

**clock set** *hh:mm:ss month day year*

*hh:mm:ss*                            24            :            :  
*day*                                1-31  
*month*                              1-12  
*year*                                1993-2035

clock set

2003 3 17 10 20 30

Ruijie# **clock set** 10:20:30 3 17 2003

Ruijie# **show clock**

clock: 2003-3-17 10:20:32

show clock	

## 2.2.2 clock update-calendar

clock                                  clock                                  privileged EXEC                                  **clock**  
**update-calendar**                                  clock                                  clock  
**clock update-calendar**

---

calendar

clock

clock

Ruijie# **clock update-calendar**

<b>clock read-calendar</b>	

### 2.2.3 exec-timeout

LINE

**exec-timeout**

**no exec-timeout**

LINE

**exec-timeout** *minutes* [*seconds*]

**no exec-timeout**

*minutes*

*seconds*

10 min

LINE

LINE

line vty 0 5 30 :

Ruijie(config-line)# **exec-timeout 5 30**

### 2.2.4 hostname

---

---

---

```
line vty 0          5 30 :
Ruijie(config-line)# exec-timeout 5 30
```

## 2.2.6 show clock

**show clock**

**show clock [detail]**

**detail**

detail

**show clock**

```
Ruijie# show clock detail
clock: 2003-3-17 10:27:21
Clock read from calendar when system boot.
```

clock set	

## 2.2.7 show running-config

**show**

**running-config**

**show running-config**

## 2.2.8 show startup-config

---

NVRAM

**show startup-config**

**show startup-config**

NVRAM

startup-config

## 2.2.9 reload

**reload**

**reload** [ *text* | **in** *mmm* | *hhh:mm* [ *text* ] | **at** *hh:mm month day year*  
[ *text* ] | **cancel** ]

*text* 1-255

**in** *mmm* | *hhh:mm*

**at** *hh:mm month day year* 200

*month* 1 12

*day* 1

---

## show reload

```
Ruijie# show reload
Reload scheduled in 595 seconds.
At 2003-12-29 11:37:42
Reload reason: test.
```

## 2.2.11 prompt

```
                                prompt
                                no prompt
                                prompt string
                                string                                32
                                EXEC
                                rgos
Ruijie(config)# prompt rgos
Ruijie(config)# end
rgos
```

## 2.2.12 banner motd

---

**banner motd**

**no banner motd**

**banner motd** *c message c*

*c*

*message*

Ruijie(config)

Ruijie(config)# **banner motd** \$ *hello,world* \$

## 2.2.13 banner login

**banner login**

**no banner login**

**banner login** *c message c*

*c*

*message*

Ruijie(config)

---

Ruijie(config)# **banner login** \$ *enter your password* \$

## 2.2.14 speed

**speed** *speed*

**no speed**

**speed** *speed*

*Speed*

---

console

Ruijie# **show line console 0**

CON Type speed Overruns

stop rx CON times 0.7(45927)TT5 1 Tf01.9780 0 10.97800 7409.823 Tm0

---

x

## 3 LINE

### 3.1 LINE

#### 3.1.1 line

LINE

**line** [**console** | **vty**] *first-line* [*last-line*]

<b>console</b>	
<b>vty</b>	telnet/ssh
<i>First-line</i>	first-line
<i>Last-line</i>	last-line

LINE

LINE VTY 1 3 LINE

Ruijie(config)# **line vty** 1 3

#### 3.1.2 line vty

VTY VTY **no**

**line vty line-number**  
**no line vty line-number**

VTY 5 0--4

VTY

VTY 20 VTY 0--19

Ruijie(config)# **line vty 19**

VTY 10 VTY 0—9

Ruijie(config)# **line vty 10**

### 3.1.3 transport input

Line **transport input** Line  
**default transport input** LINE

**transport input {all | ssh | telnet | none}**

**default transport input**

<b>all</b>	Line
<b>ssh</b>	Line SSH
<b>telnet</b>	Line Telnet
<b>none</b>	Line

```

                VTY                                TTY
NONE
  default transport input

```

Line

```

                Line                                VTY
VTY                                show running    Line

```

```

r
                default transport input    no transport inp
ut                LINE                    transpo
rt input none

```

```

                line vty 0 4                telnet
Ruijie# configure terminal
Ruijie(config)# line vty 0 4
Ruijie(config-line)# transport input telnet

```

<b>show running</b>	

RGOS10.1

### 3.1.4 access-class

```

                Line            ACL            access-class acl-no
{ in | out }            Line            no access-class
access-list-number {in | out}            LINE    ACL
[no] access-class access-list-number {in | out}

```

--	--

<i>access-list-number</i>	access-list
<b>in</b>	
<b>out</b>	

Line

Line

Line

access list

Line

**access-class**

**show running**

line vty 0 4

access-list 10

Ruijie# **configure terminal**

Ruijie(config)# **line vty 0 4**

Ruijie(config-line)# **access-class 10 in**

<b>show running</b>	

RGOS10.1

---

# 4

## 4.1

- |          | CLI | COPY               |
|----------|-----|--------------------|
| • Xmodem |     | <b>copy xmodem</b> |
| • Tftp   |     | <b>copy tftp</b>   |

### 4.1.1 copy xmodem

xmodem

xmodem

**copy flash: filename xmodem**  
**copy xmodem flash: filename**

---

r

copy xmodeam flash:"filename"    copy flash:"filename" xmodeam

---

*filename*

Xmodem

Xmodem

:

xmodem  
xmodem

:

---

```
Ruijie# copy xmodem flash: config.text  
Ruijie# copy flash: config.text xmodem
```

---

# 5

## 5.1

---

```

IP
.
ping
ping
!
```

```
DNS
```

```
ping
```

```

Ruijie# ping 192.168.5.1
Sending 5, 100-byte ICMP Echoes to 192.168.5.1, timeout
is 2 seconds:
 < press Ctrl+C to break >
!!!!
Success rate is 100 percent (5/5), round-trip
min/avg/max = 1/2/10 ms
```

```
ping
```

```

Ruijie# ping 192.168.5.197 length 1500 ntimes 100
timeout 3 data ffff source 192.168.4.10
Sending 100, 1000-byte ICMP Echoes to 192.168.5.197,
timeout is 3 seconds:
 < press Ctrl+C to break >
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
Success rate is 100 percent (100/100), round-trip
min/avg/max = 2/2/3 ms
```

## 5.1.2 traceroute

```
traceroute
```

```

traceroute [vrf] [vrf-name] [ip ip-address][ip-address [probe number ]
[source source-address] [timeout seconds] [ttl minimum maximum]]
```

<i>vrf-name</i>	VRF
<i>ip-address</i>	IPv4

<i>number</i>	
<i>source-address</i>	IPV4
<i>seconds</i>	
<i>minimum maximum</i>	TTL

traceroute

DNS

traceroute

1 traceroute

Ruijie# **traceroute** 61.154.22.36

< press Ctrl+C to break >

Tracing the route to 61.154.22.36

```

1    192.168.12.1    0 msec  0 msec  0 msec
2    192.168.9.2    4 msec  4 msec  4 msec
3    192.168.9.1    8 msec  8 msec  4 msec
4    192.168.0.10   4 msec  28 msec 12 msec
5    202.101.143.130 4 msec  16 msec 8 msec
6    202.101.143.154 12 msec 8 msec 24 msec
7    61.154.22.36  12 msec 8 msec 22 msec

```

IP 61.154.22.36

1 6

2 traceroute

Ruijie# **traceroute** 202.108.37.42

< press Ctrl+C to break >

Tracing the route to 202.108.37.42

```

1    192.168.12.1    0 msec  0 msec  0 msec
2    192.168.9.2    0 msec  4 msec  4 msec
3    192.168.110.1  16 msec 12 msec 16 msec
4    * * *
5    61.154.8.129   12 msec 28 msec 12 msec
6    61.154.8.17    8 msec 12 msec 16 msec

```

---

```

7      61.154.8.250      12 msec  12 msec  12 msec
8      218.85.157.222   12 msec  12 msec  12 msec
9      218.85.157.130   16 msec  16 msec  16 msec
10     218.85.157.77    16 msec  48 msec  16 msec
11     202.97.40.65     76 msec  24 msec  24 msec
12     202.97.37.65     32 msec  24 msec  24 msec
13     202.97.38.162    52 msec  52 msec  224 msec
14     202.96.12.38     84 msec  52 msec  52 msec
15     202.106.192.226  88 msec  52 msec  52 msec
16     202.106.192.174  52 msec  52 msec  88 msec
17     210.74.176.158  100 msec 52 msec  84 msec
18     202.108.37.42    48 msec  48 msec  52 msec
Ruijie#

```

```

                                     IP
202.108.37.42                        1 17
4

```

```
Ruijie# traceroute www.ietf.org
```

```
Translating " www.ietf.org "...[OK]
```

```
< press Ctrl+C to break >
```

```
Tracing the route to 64.170.98.32
```

```

1      192.168.217.1      0 msec  0 msec  0 msec
2      10.10.25.1        0 msec  0 msec  0 msec
3      10.10.24.1        0 msec  0 msec  0 msec
4      10.10.30.1        10 msec 0 msec  0 msec
5      218.5.3.254       0 msec  0 msec  0 msec
6      61.154.8.49       10 msec 0 msec  0 msec
7      202.109.204.210   0 msec  0 msec  0 msec
8      202.97.41.69      20 msec 10 msec 20 msec
9      202.97.34.65      40 msec 40 msec 50 msec
10     202.97.57.222     50 msec 40 msec 40 msec
11     219.141.130.122   40 msec 50 msec 40 msec
12     219.142.11.10     40 msec 50 msec 30 msec
13     211.157.37.14     50 msec 40 msec 50 msec
14     222.35.65.1       40 msec 50 msec 40 msec
15     222.35.65.18     40 msec 40 msec 40 msec
16     222.35.15.109    50 msec 50 msec 50 msec
17     * * *
18     64.170.98.32     40 msec 40 msec 40 msec

```

---

# 6

## 6.1

- **interface aggregateport**
- **interface fastEthernet**
- **interface giagbitEthernet**
- **interface vlan**
- **medium-type**
- **descriptioin**
- **shutdown**
- **speed**
- **duplex**
- **flowcontrol**
- **mtu**
- **carrier-delay**
- **clear counters**
- **clear interface**
- **switchport**
- **switchport mode**
- **switchport access**
- **switchport trunk**
- **snmp trap link-status**

### 6.1.1 interface aggregateport

no

**interface aggregateport** *port-number*

*port-number* Aggregate port

---

```

port                                     aggregate port   aggregate
aggregate port                           show interfaces show
interfaces aggregateport

```

```

Ruijie(config)# interface aggregateport 3
Ruijie(config-if)#

```

<a href="#"><u>show interfaces</u></a>	

### 6.1.2 interface fastEthernet

```

interface fastEthernet mod-num/port-num

```

```

mod-num/port-num /

```

```

no                                     show interfaces
show interfaces fastEthernet

```

```

Ruijie(config)# interface fastEthernet 1/2
Ruijie(config-if)#

```

<b>show interfaces</b>	

### 6.1.3 interface giagbitEthernet

---

**interface gigabitEthernet** *mod-num/port-num*

*mod-num/port-num* /

---

<b>show interfaces</b>	

### 6.1.5 medium-type

**no**

**medium-type { fiber | copper }**

**no medium-type**

**fiber**

**copper**

Ap SVI

Ruijie(config)# **interface gigabitethernet 1/1**

Ruijie(config-if)# **medium-type copper**

<b>show interfaces</b>	

---

no

**description** *string*

**no description**

*string*

### show interfaces

```
Ruijie(config)# interface gigabitethernet 1/1
```

```
Ruijie(config-if)# description GBIC-1
```

show interfaces	

## 6.1.7 shutdown

no

**shutdown**

**no shutdown**

Ap

SVI

**show interfaces**

Ap 1

```
Ruijie(config)# interface aggregateport 1
```

---

Ruijie(config-if)# **shutdown**

Ap 1

Ruijie(config)# **interface aggregateport 1**

Ruijie(config-if)# **no shutdown**

<b>clear interface</b>	

---

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# speed 100
```

show interfaces	

### 6.1.9 duplex

no

**duplex {auto | full | half}**

**no duplex**

**auto**

**full**

**half**

**show interfaces**

```
Ruijie(config-if)# duplex full
```

show interfaces	

### 6.1.10 flowcontrol

---

no

**flowcontrol {auto | off | on}**

**no flowcontrol**

**auto**

**off**

**on**

**show interfaces**

1/1

Ruijie(config)# **interface gigabitethernet 1/1**

Ruijie(config-if)# **flowcontrol on**

<b>show interfaces</b>	

## 6.1.11 mtu

mtu

**Mtu num**

*num* 64 9216( 65536 )

1500



---

## 6.1.13 clear counters

**clear counters** [*interface-id*]

*interface-id*

**clear counters**                      **show interfaces**

Ruijie# **clear counters gigabitethernet 1/1**

<b>show interfaces</b>	

## 6.1.14 clear interface

**clear interface** *interface-id*

*interface-id*

Switch Port,L2 Aggregate port                      Routed port  
L3 Aggregate port  
**shutdown**    **no shutdown**

Ruijie# **clear interface gigabitethernet 1/1**

---

<b>shutdown</b>	

### 6.1.15 switchport

```

2
3
switchport
no switchport

```

2

switchport

2

3

2

Ruijie(config-if)# **switchport**

<b>show interfaces</b>	

### 6.1.16 switchport mode

```

access port      trunk port,      switch port      802.1Q      no

```

**switchport mode {access | trunk}**

**no switchport mode**

---

<b>access</b>	switch port    access port
<b>trunk</b>	switch port    trunk port

switch port                  access

switch port                  access                          VLAN

---

```

          VLAN ID          VLAN ID
        VLAN              VLAN
VLAN ID          VLAN
                    trunkport

```

```

Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport access vlan 2

```

<b>switchport mode</b>	switch port
<b>switchport trunk</b>	trunkport native VLAN Trunk VLAN

### 6.1.18 switchport trunk

```

trunkport native VLAN Trunk VLAN
no trunk
switchport trunk {allowed vlan {all | [add | remove | [Tc79Tw({}Tj]TT2 1 TfD

```

---

<b>native vlan</b> <i>vlan-id</i>	Native VLAN
--------------------------------------	-------------

VLAN all Native VLAN VLAN 1

### **Native VLAN**

```
Trunk                                native VLAN    native VLAN
                                     UNTAG             VLAN
VLAN  VLAN ID    VLAN ID  IEEE 802.1Q  PVID    native
Trunk  UNTAG      Trunk    Trunk        native VLAN
```

### **VLAN**

```
Trunk                                VLAN 1  4094
                                     Trunk    VLAN      VLAN
Trunk
```

### **show interfaces switchport**

VLAN 2 1/15

---

## 6.1.19 snmp trap link-status

```

no snmp trap link-status

```

snmp trap link-status

no snmp trap link-status

```

snmp trap link-status

```

```

snmp trap link-status

```

Link trap

```

Ruijie(config)# interface gigabitEthernet 1/1
Ruijie(config-if)# no snmp trap link-status

```

Link trap

```

Ruijie(config)# interface gigabitEthernet 1/1
Ruijie(config-if)# snmp trap link-status

```

Ruijie(config-if)# snmp trap link-status	link trap .
Ruijie(config-if)# no snmp trap link-status	link trap .

## 6.2

### 6.2.1 show interfaces

---

**show interfaces** [*interface-id*] [**counters | description | status | switchport | trunk** ]

*interface-id*                            aggregateport          SVI  
 loopback

**counters**

**description**                            link

**status**

**switchport**

**trunk**    trunking port                            Aggregate port

```
Ruijie# show interfacesgigabitEthernet 0/1 switchport
Interface Switchport ModeAccess Native Protected VLAN
lists
-----
GigabitEthernet 0/1 enabled Access 11 Disabled ALL
```



---

<b>shutdown</b>	
<b>speed</b>	
<b>switchport priority</b>	802.1q
<b>switchport protected</b>	

# 7 Aggregate Port

## 7.1

### 7.1.1 port-group

Aggregate Port no  
Aggregate Port

**port-group** *port-group-number*

**no port-group**

Aggregate Port

<b>src-dst-ip</b>	IP      IP IP——    IP IP——    IP

**src-dst-mac**

MAC      MAC  
MAC——    MAC  
            MAC——

MAC

MAC

<b>load-balance</b>	aggeregaye port
<b>summary</b>	aggregate port

aggregate port

aggregate port

```
Ruijie# show aggregateport 1 summary
AggregatePort  MaxPorts      SwitchPort Mode  Ports
-----
Ag1              8              Enabled  ACCESS
```

<b>aggregateport load-balance</b>	AP

# 8 LACP

## 8.1

### 8.1.1 lacp port-priority

LACP

no

**lacp port-priority** *port-priority*

**no lacp port-priority**

	<i>port-priority</i>	0-65535

32768

,

### 8.1.2 port-group mode

LACP ID no  
LACP

**port-group** *key* **mode** active | passive

**no port-group**

<i>Key</i>	ID, key
<b>active</b>	LACP
<b>passive</b>	LACP LACP LACP .

LACP

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# port-group 1 mode active
```

<b>lacp port-priority</b>	LACP

-	-

### 8.1.3 lacp port-priority

LACP no

**lacp port-priority** *port-priority*

**no lacp port-priority**

LACP

┌

┌

```
Ruijie(config)# lacp system-priority 4096
```

┌

<b>port-group</b> <i>key mode</i>	<b>active   passive</b>	LACP	ID
<b>port-group</b> <i>key mode</i>			
<b>lacp port-priority</b>		LACP	

┌

┌

-		-	

## 8.2

- show lacp summary

### 8.2.1 show lacp summary

LACP

**show lacp summary**

┌

-		-	

┌

┌

┌

┌

```
Ruijie# show LACP summary
```

```
Flags:S - Device is sending Slow LACPDUs  F - Device is sending fast LACPDUs.
```

```
A - Device is in active mode.  P - Device is in passive mode.
```

```
Aggregate port 3:
```





# 9 VLAN

## 9.1

### 9.1.1 vlan

```

VLAN
VLAN
vlan vlan-id
no vlan vlan-id
    
```

<i>vlan-id</i>	VLAN ID VLAN VLAN 1

```

end          Ctrl+C
exit
    
```

```

Ruijie(config)# vlan 1
Ruijie(config-vlan)#
    
```

<b>show vlan</b>	VLAN

### 9.1.2 name

```

VLAN          no
    
```

**name** *vlan-name*

**no name**

<i>vlan-name</i>	VLAN

VLAN

VLAN

**show vlan**            *vlan*

```
Ruijie(config)# vlan 10
Ruijie(config-vlan)# name vlan10
```

<b>show vlan</b>	VLAN

### 9.1.3 switchport mode

access port            trunk port,            switch port            802.1Q            no

**switchport mode** {**access** | **trunk**}

**no switchport mode**

<b>access</b>	switch port    access port
<b>trunk</b>	switch port    trunk port

switch port            access

VLAN

VLAN ID                          VLAN ID  
 VLAN                                  VLAN  
 VLAN ID                          VLAN  
                                       trunkport

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport access vlan 2
```

<b>switchport mode</b>	switch port
<b>switchport trunk</b>	trunkport                  native VLAN Trunk                        VLAN

### 9.1.5 switchport trunk

trunkport                  native VLAN                  Trunk                  VLAN  
                                       **no**                          trunk

```
switchport trunk {allowed vlan { all | [add | remove | except]
vlan-list }| native vlan vlan-id}
no switchport trunk {allowed vlan | native vlan }
```

	Trunk                  VLAN
	vlan-list                  VLAN
	VLAN

**allowed vlan** *vlan-list*

VLAN            all            Native VLAN    VLAN 1

**Native VLAN**

Trunk                    native VLAN            native VLAN  
                           UNTAG                    VLAN  
                           VLAN ID    IEEE 802.1Q    PVID    native  
 VLAN    VLAN ID            Trunk            native VLAN  
                           UNTAG

**VLAN**

Trunk                                    VLAN 1 4094  
                           Trunk            VLAN            VLAN  
                           Trunk

**show interfaces switchport**

VLAN 2            1/15

```
Ruijie(config)# interface fastethernet 1/15
Ruijie(config-if)# switchport trunk allowed vlan remove
2
Ruijie(config-if)# end
Ruijie# show interfaces fastethernet1/15 switchport
Switchport is enabled
Mode is trunk port
Access vlan is 1,Native vlan is 1
Protected is disabled
Vlan lists is
1,3-4094
```



## 9.2.1 show vlan

VLAN

**show vlan** [*id vlan-id*]

<i>vlan-id</i>	VLAN ID

**end**

**Ctrl+C**

**exit**

```
Ruijie# show vlan id 1
VLAN[1] "VLAN0001"
GigabitEthernet 3/1
GigabitEthernet 3/2
GigabitEthernet 3/3
GigabitEthernet 3/4
GigabitEthernet 3/5
GigabitEthernet 3/6
GigabitEthernet 3/7
GigabitEthernet 3/8
GigabitEthernet 3/9
GigabitEthernet 3/10
GigabitEthernet 3/11
GigabitEthernet 3/12
```

<b>name</b>	VLAN
<b>switchport access</b>	Vlan

# 10 Super-vlan

## 10.1

### 10.1.1 supervlan

VLAN      **supervlan**

<i>Vlan-id-list</i>	VLAN subvlan ID, vlan

VLAN

**no subvlan**      supevlan      subvlan

```
Ruijie(config)# vlan 3
Ruijie(config-vlan)# supervlan
Ruijie(config-vlan)# subvlan 5
Ruijie(config-vlan)# subvlan 7-19
```

```
Ruijie(config)# vlan 3
Ruijie(config-vlan)# subvlan-address-range
192.168.3.10 192.168.3.100
```

<b>show supervlan</b>	supervlan

### 10.1.4 proxy-arp

VLAN ARP

```
proxy-arp
no proxy-arp
```

VLAN

```
end                   Ctrl+C
exit
```

```
Ruijie(config)# vlan 3
Ruijie(config-vlan)# proxy-arp
```

<b>show supervlan</b>	supervlan

## 10.2

### 10.2.1 show supervlan

SuperVLAN      SubVLAN

**show supervlan**

**show supervlan id *vlan-id***

<i>vlan-id</i>	VLAN ID

Ruijie# **show supervlan**

```
supervlan id supervlan arp-proxy subvlan id subvlan
arp-proxy subvlan ip range
```

```
-----
```

3	ON	4	ON
		5	ON

# 11 Protocol VLAN

## 11.1

- **protocol-vlan profile** *num* **frame-type** [*type*] **ether-type** [*type*]
- **protocol-vlan profile** *num* **vlan id**

### 11.1.1 protocol-vlan profile num frame-type type ether-type

**type**

profile

*num* profile

*type*

```
Ruijie(config)# protocol-vlan profile 1 frame-type  
ETHERII ether-type aarp
```

**show protocol-vlan profile**

**show protocol-vlan profile** *num*

**no protocol-vlan profile**

**no protocol-vlan profile** *num*

RGOS10.1

### 11.1.2 protocol-vlan profile num vlan id

profile

*num* profile

*id* VLAN ID 1- VLAN

```
Ruijie(config-if)# protocol-vlan profile 1 vlan 101
```

**show protocol-vlan profile**

**show protocol-vlan profile** *num*

**no protocol-vlan profile**

**no protocol-vlan profile** *num*

RGOS10.1

## 11.2

- **show protocol-vlan**

### 11.2.1 show protocol-vlan

Protocol VLAN

**show vlan protocol-vlan**

```
Ruijie# show protocol-vlan
```

RGOS10.1

# 12 PrivateVLAN

## 12.1

- **private-vlan type**
- **private-vlan association**
- **private-vlan mapping**
- **switchport mode private-vlan**
- **switchport private-vlan host-association**
- **switchport private-vlan mapping**

### 12.1.1 private-vlan type

VLAN VLAN

**private-vlan** {*community* | *isolated* | *primary*}

**no private-vlan** {*community* | *isolated* | *primary*}

*community* community VLAN

*isolated* isolated VLAN

*primary* primary VLAN

*no* VLAN

VLAN

```
Ruijie(config)# vlan 22
```

```
Ruijie(config-vlan)# private-vlan primary
```

```
show vlan private-vlan
```

RGOS10.1

### 12.1.2 private-vlan association

secondary VLAN primary VLAN

**private-vlan association** {*svlist* | **add** *svlist* | **remove** *svlist*}  
**no private-vlan association**

*svlist* secondary VLAN list

**no** primary VLAN secondary VLAN

Primary VLAN

```
Ruijie(config)# vlan 22  
Ruijie(config-vlan)# private-vlan association add  
24-26
```

**show vlan private-vlan**

RGOS10.1

### 12.1.3 private-vlan mapping

secondary VLAN SVI

**private-vlan mapping** {*svlist* | **add** *svlist* | **remove** *svlist*}  
**no private-vlan mapping**

*svlist* secondary VLAN list

**no**

Primary VLAN

```
Ruijie(config)# interface vlan 22
```

```
Ruijie(config-if)# private-vlan mapping add 24-26
```

```
show vlan private-vlan
```

```
RGOS10.1
```

## 12.1.4 switchport mode private-vlan

private VLAN

```
switchport mode private-vlan{host|promiscuous}
```

```
no switchport mode
```

```
host          VLAN
```

```
promiscuous   VLAN
```

```
no            VLAN
```

```
Ruijie(config)# interface gigabitEthernet0/2
```

```
Ruijie(config-if)# switchport mode private-vlan host
```

```
show vlan private-vlan
```

```
RGOS10.1
```

## 12.1.5 switchport private-vlan host-association

private VLAN

primary VLAN

secondary VLAN

```
switchport private-vlan host-association p_vid s_vid
```

```
no switchport private-vlan host-association
```

*p\_vid*            primary VID  
*s\_vid*

## show vlan private-vlan

RGOS10.3(5)

### 12.1.7 switchport private-vlan mapping

private VLAN

secondary VLAN

**switchport private-vlan mapping** *p\_vid* {*svlist* | **add** *svist* | **remove** *svlist*}

**no switchport private-vlan mapping**

*p\_vid*

primary VID

*svlist*

secondary VLAN list

**no**

secondaryVLAN

VLAN

```
Ruijie(config)# interface gigabitEthernet 0/1
Ruijie(config-if)# switchport mode private-vlan
promiscuous
Ruijie(config-if)# switchport private-vlan mapping 22
add 23-25
```

**show vlan private-vlan**

RGOS10.1

Ö

private VLAN

**show vlan private-vlan [community | primary | isolated]**

<b>primary</b>	primary VLAN
<b>community</b>	community VLAN
<b>isolated</b>	isolated VLAN

```
Ruijie# show vlan private-vlan
```

RGOS10.1

## 12.3 Hybrid

- **switchport mode hybrid**
- **switchport hybrid native vlan**
- **switchport hybrid allowed vlan**

### 12.3.1 switchport mode hybrid

**switchport mode hybrid**

**no switchport mode**

hybrid

**no** hybrid

```
Ruijie(config-if)# switchport mode hybrid
```

RGOS10.1

```
Ruijie(config-if)# switchport hybrid allowed vlan add  
untagged 3-5
```

RGOS10.1

# 13 MAC

## 13.1

- **mac-address-table aging-time**
- **clear mac-address-table dynamic**
- **clear mac-address-table filtering**
- **clear mac-address-table static**
- **mac-address-table static**
- **mac-address-table filtering**
- **mac-address-table notification**
- **snmp trap mac-notification**
- **address-bind**
- **address-bind uplink**
- **address-bind install**
- **address-bind ipv6-mode**

### 13.1.1 mac-address-table aging-time

no

**mac-address-table aging-time** *seconds*

**no mac-address-table aging-time**

*seconds*

300

**show mac-address-table aging-time**

**show mac-address-table dynamic**

```
Ruijie(config)# mac-address-table aging-time 150
```

<b>show mac-address-table aging-time</b>	
<b>show mac-address-table dynamic</b>	

### 13.1.2 clear mac-address-table dynamic

```
clear mac-address-table dynamic[address mac-addr] [interface interface-id] [vlan vlan-id]
```

<b>dynamic</b>	
<b>address</b> <i>mac-addr</i>	
<b>interface</b> <i>interface-id</i>	
<b>vlan</b> <i>vlan-id</i>	VLAN

**show mac-address-table dynamic**

```
Ruijie# clear mac-address-table dynamic
```

<b>show mac-address-table dynamic</b>	

### 13.1.3 clear mac-address-table filtering

MAC

<b>address</b> <i>mac-addr</i>	
<b>interface</b> <i>interface-id</i>	
<b>vlan</b> <i>vlan-id</i>	VLAN

### show mac-address-table static

MAC 00d0.f800.073c

```
Ruijie# clear mac-address-table static address
00d0.f800.073c
```

<b>mac-address-table static</b>	
<b>show mac-address-table static</b>	

## 13.1.5 mac-address-table static

**no**

**mac-address-table static** *mac-addr* **vlan** *vlan-id* **interface** *interface-id*

**no mac-address-table static** *mac-addr* **vlan** *vlan-id* **interface** *interface-id*

<i>mac-addr</i>	MAC
<i>vlan-id</i>	VLAN
<i>interface-id</i>	( AggregatePort)

```

ss-table static
ble static

```

```

show mac-address-table static
clear mac-address-table static

```

```

00d0.f800.073c VLAN 4

```

```

gigabitethernet 1/1

```

```

Ruijie(config)# mac-address-table static
00d0.f800.073c vlan 4 interface gigabitethernet 1/1

```

<b>show mac-address-table static</b>	
<b>clear mac-address-table static</b>	

### 13.1.6 mac-address-table filtering

```

no

```

```

mac-address-table filtering mac-address vlan vlan-id

```

```

no mac-address-table filtering mac-address vlan vlan-id

```

<i>mac-address</i>	
<b>vlan</b> <i>vlan-id</i>	VLAN ID

**show mac-address-table filtering**

```
Ruijie(config)# mac-address-table filtering  
00d0f8000000 vlan 1
```

<b>clear mac-address-table filtering</b>	
<b>show mac-address-table filtering</b>	

**13.1.7 mac-address-table notification**

MAC

no

**mac-address-table notification [interval *value* |**

```
Ruijie(config)# mac-address-table notification
Ruijie(config)# mac-address-table notification
interval 40
Ruijie(config)# mac-address-table notification
history-size 100
```

<b>snmp-server enable traps</b>	trap
<b>show mac-address-table notification</b>	MAC
<b>snmp trap mac-notification</b>	MAC

### 13.1.8 snmp trap mac-notification

MAC no

```
snmp trap mac-notification {added | removed}
no snmp trap mac-notification {added | removed}
```

<b>added</b>	
<b>removed</b>	

**show mac-address-table notification** *interface*

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# snmp trap mac-notification added
```

--	--

<b>mac-address-table notification</b>	MAC
<b>show mac-address-table notification</b>	MAC

### 13.1.9 address-bind

ip mac .

**address-bind** *ip-address mac-address*

**no address-bind** *ip-address*

<i>ip-address</i>	IP
<i>mac-address</i>	mac

MAC IP MAC IP  
 IP MAC IP  
 MAC N 1

MAC

---

<i>intf-id</i>	

IP                    IP                    MAC                    IP  
IP                    IP                    MAC                    IP  
MAC

```
Ruijie(config)# address-bind uplink fa0/1
Ruijie(config)# address-bind install
```

<b>show address-bind uplink</b>	

RGOS10.1

### 13.1.12 address-bind ipv6-mode

ip IP

**address-bind ipv6-mode compatible**

**address-bind ipv6-mode loose**

**address-bind ipv6-mode strict**

	ipv 4	IPV 6
--	----------	----------

		I F V 4 + M A C	i p v 6
		I F V 4 + M A C	I P V 6

			M A C
		I P V 4 + M A C	M A C
			I P V 6

IP 192.168.5.2 00d0.f822.33aa  
IPV6

```
Ruijie# configure t  
Enter configuration commands, one per line. End with  
CNTL/Z.  
Ruijie(config)# address-bind 00d0.f822.33aa ip  
192.168.5.2  
Ruijie(config)# address-bind ipv6-mode compatible
```

## 13.2

- **show mac-address-table address**

- **show mac-address-table aging-time**
- **show mac-address-table count**
- **show mac-address-table dynamic**
- **show mac-address-table filtering**
- **show mac-address-table interface**
- **show mac-address-table notification**
- **show mac-address-table static**
- **show mac-address-table vlan**
- **show address-bind**

### 13.2.1 show mac-address-table address

MAC

**show mac-address-table** [**address** *mac-addr*] [**interface** *interface-id*]  
[**vlan** *vlan-id*]

<b>address</b> <i>mac-addr</i>	MAC
<b>interface</b> <i>interface-id</i>	
<b>vlan</b> <i>vlan-id</i>	VLAN

```
Ruijie# show mac-address-table address 00d0.f800.1001
Vlan      MAC Address      Type      Interface
-----  -
1         00d0.f800.1001  STATIC   Gi1/1
```

<b>show mac-address-table static</b>	
<b>show mac-address-table filtering</b>	
<b>show mac-address-table dynamic</b>	

<b>show mac-address-table interface</b>	
<b>show mac-address-table vlan</b>	VLAN
<b>show mac-address-table count</b>	
<b>show mac-address-table static</b>	
<b>show mac-address-table filtering</b>	

### 13.2.2 show mac-address-table aging-time

**show mac-address-table aging-time**

```
Ruijie# show mac-address-table aging-time
```

```
Aging time      : 300
```

<b>mac-address-table aging-time</b>	

### 13.2.3 show mac-address-table count

**show mac-address-table count**

```
Ruijie# show mac-address-table count
```

```
Dynamic Address Count : 51
```

```
Static Address Count  : 0
```

```
Filter Address Count  : 0
```

```
Total Mac Addresses   : 51
```

```
Total Mac Address Space Available: 8139
```

<b>show mac-address-table static</b>	
<b>show mac-address-table filtering</b>	
<b>show mac-address-table dynamic</b>	
<b>show mac-address-table address</b>	

**show mac-address-table interface**

```

1      0007.95c7.dff9      DYNAMIC  gigabitethernet 1/1
1      0007.95cf.eee0      DYNAMIC  gigabitethernet 1/1
1      0007.95cf.f41f      DYNAMIC  gigabitethernet 1/1
1      0009.b715.d400      DYNAMIC  gigabitethernet 1/1
1      0050.bade.63c4      DYNAMIC  gigabitethernet 1/1

```

<b>clear mac-address-table dynamic</b>	

### 13.2.5 show mac-address-table filtering

**show mac-address-table static [addr *mac-addr*] [vlan *vlan-id*]**

<i>mac-addr</i>	MAC
<i>vlan-id</i>	VLAN

Ruijie# **show mac-address-table filtering**

```

Vlan      MAC Address      Type      Interface
-----
1         0000.2222.2222    FILTER   Not available

```

<b>clear mac-address-table filtering</b>	
<b>mac-address-table filtering</b>	

<i>interface-id</i>	( AggregatePort)
<i>vlan-id</i>	VLAN

```
Ruijie# show mac-address-table interface
gigabitethernet 1/1
```

```
Vlan      MAC Address      Type      Interface
-----
1         00d0.f800.1001  STATIC   gigabitethernet 1/1
1         00d0.f800.1002  STATIC   gigabitethernet 1/1
1         00d0.f800.1003  STATIC   gigabitethernet 1/1
1         00d0.f800.1004  STATIC   gigabitethernet 1/1
```

<b>show mac-address-table static</b>	
<b>show mac-address-table filtering</b>	
<b>show mac-address-table dynamic</b>	
<b>show mac-address-table address</b>	
<b>show mac-address-table vlan</b>	VLAN

**show mac-address-table count**

MAC

---

<b>interface</b> <i>interface-id</i>	MAC
history	MAC

MAC

MAC

---

*mac-addr*

MAC

```

1      00d0.f800.1002   STATIC  gigabitethernet 1/1
1      00d0.f800.1003   STATIC  gigabitethernet 1/1
    
```

<b>show mac-address-table static</b>	
<b>show mac-address-table filtering</b>	
<b>show mac-address-table dynamic</b>	
<b>show mac-address-table address</b>	
<b>show mac-address-table interface</b>	
<b>show mac-address-table count</b>	

### 13.2.10 show address-bind

**show address-bind**

```

Ruijie# show address-bind
IP Address      Binding MAC Addr
-----
3.3.3.3         00d0.f811.1112
3.3.3.4         00d0.f811.1117
    
```

<b>address-bind</b>	

# 14 DHCP Snooping

## 14.1 DHCP snooping

DHCP snooping

- **ip dhcp snooping**
- **ip dhcp snooping vlan**
- **ip dhcp snooping bootp-bind**
- **ip dhcp snooping ver7ty mac-address**
- **ip dhcp snooping information option**
- **ip dhcp snooping database write-delay**
- **ip dhcp snooping database write-to-flash**

### 14.1.1 ip dhcp snooping

```
DHCP Snooping
no
DHCP Snooping
[no] ip dhcp snooping
```

```
DHCP Snooping
DHCP snooping
show ip dhcp snooping
```

---

```
r
DHCP Snooping Private VLAN
```

---

```
DHCP snooping
Ruijie# configure terminal
```

DHCP Snooping

```
Ruijie(config)# end
```

<b>ip dhcp snooping</b>	DHCP Snooping

### 14.1.3 ip dhcp snooping bootp-bind

```
DHCP Snooping      Bootp
no                  DHCP snooping      Bootp
```

```
[no] ip dhcp snooping bootp-bind
```

ü

<b>show ip dhcp snooping</b>	DHCP snooping

### 14.1.4 ip dhcp snooping verify mac-address

MAC  
no                      MAC

**[no] ip dhcp snooping verify mac-address**

MAC                      DHCP CLIENT  
MAC                      DHCP                      CLIENT MAC  
MAC

DHCP                      MAC

```
Ruijie# configure terminal
Ruijie(config)# ip dhcp snooping verify mac-address
Ruijie(config)# end
Ruijie# show ip dhcp snooping
Switch DHCP snooping status    ENABLE
Verification of hwaddr field status    ENABLE
DHCP snooping database write-delay time: 0 seconds
DHCP snooping option 82 status: ENABLE
DHCP snooping Support Bootp bind status: ENABLE
Interface                                      Trusted                      Rate limit (pps)
-----
```

<b>show ip dhcp snooping</b>	DHCP snooping

### 14.1.5 ip dhcp snooping information option





## DHCP Snooping

FLASH

DHCP

flash

```
Ruijie# configure terminal  
Ruijie(config)# ip dhcp snooping database  
write-to-flash  
Ruijie(config)# end
```

## 14.2 DHCP snooping

DHCP snooping

- **ip dhcp snooping suppression**
- **ip dhcp snooping trust**
- **ip dhcp snooping limit rate**

### 14.2.1 ip dhcp snooping suppression

suppression

no

no suppression

**[no] ip dhcp snooping suppression**

DHCP

DHCP

**fastethernet 0/2** suppression

```

Ruijie# configure terminal
Ruijie(config)# interface fastethernet 0/2
Ruijie(config-if)# ip dhcp snooping suppression
Ruijie(config-if)# end

```

## 14.2.2 ip dhcp snooping trust

```

DHCP snooping          TRUST
                        no          UNTRUST

```

```
[no] ip dhcp snooping trust
```

UNTRUST

```

TRUST          DHCP          TRUST
DHCP          DHCP          UNTRUST

```

**fastethernet 0/1** TRUST

```

Ruijie# configure terminal
Ruijie(config)# interface fastEthernet 0/1
Ruijie(config-if)# ip dhcp snooping trust
Ruijie(config-if)# end
Ruijie# show ip dhcp snooping
Switch DHCP snooping status  ENABLE
Verification of hwaddr field status  DISABLE
DHCP snooping database write-delay time: 0 seconds

```

```
DHCP snooping option 82 status: ENABLE
DHCP snooping Support Bootp bind status: ENABLE
Interface                Trusted    Rate limit (pps)
-----                -
FastEthernet0/1         YES      unlimited
```

<b>show ip dhcp snooping</b>	DHCP snooping

```

DHCP snooping database write-delay time: 0 seconds
DHCP snooping option 82 status: ENABLE
DHCP snooping Support Bootp bind status: ENABLE
Interface                Trusted    Rate limit (pps)
-----
FastEthernet0/1          NO        100
    
```

<b>show ip dhcp snooping</b>	DHCP snooping

## 14.3 DHCP snooping

- **show ip dhcp snooping**
- **show ip dhcp snooping binding**

### 14.3.1 show ip dhcp snooping

DHCP Snooping

**show ip dhcp snooping**

DHCP Snooping

DHCP Snooping

```

Ruijie# show ip dhcp snooping
Switch DHCP snooping status  ENABLE
Verification of hwaddr field status  DISABLE
DHCP snooping database write-delay time: 0 seconds
DHCP snooping option 82 status: ENABLE
DHCP snooping Support Bootp bind status: ENABLE
Interface                Trusted    Rate limit (pps)
    
```

-----



**ip dhcp snooping**

<b>ip dhcp snooping binding</b>	DHCP snooping
<b>clear ip dhcp snooping binding</b>	DHCP snooping

## 14.4 DHCP snooping

DHCP Snooping

- **clear ip dhcp snooping binding**
- **debug ip dhcp snooping**

### 14.4.1 clear ip dhcp snooping binding

DHCP Snooping

**clear ip dhcp snooping binding**

DHCP snooping

DHCP snooping

```
Ruijie# clear ip dhcp snooping binding
Ruijie# show ip dhcp snooping binding
Total number of bindings: 0
MacAddress IpAddress Lease(sec) Type VLAN Interface
-----
```

<b>show ip dhcp snooping binding</b>	DHCP snooping

## 14.4.2 debug ip dhcp snooping

DHCP Snooping

**debug ip dhcp snooping {event | packet}**

DHCP snooping

DHCP snooping

```
Ruijie# debug ip dhcp snooping event
```

```
Ruijie# debug ip dhcp snooping packet
```

# 15 IGMP Snooping

## 15.1

IGMP Snooping profile

Profile

- range
- deny
- permit
  
- ip igmp profile
- ip igmp snooping ivgl
- ip igmp snooping svgl
- ip igmp snooping svgl profile
- ip igmp snooping ivgl-svgl
- ip igmp snooping dyn-mr-aging-time
- ip igmp snooping query-max-response-time
-

<i>profile-number</i>	profile 1-65535

IGMP Profiles

SVGL

IGMP Filtering

profile

profile

1 profile profile

Ruijie(config)# **ip igmp profile 1**

Ruijie(config-profile)#

<b>range</b>	profile

### 15.1.2 range

profile  
range

profile

profile

no

**range** *low-ip-address* [*high-ip-address*]

**no range** *low-ip-address* [*high-ip-address*]

<i>low-ip-address</i>	
<i>high-ip-address</i>	

profile

low-ip-address                      high-ip-address  
    profile                      deny

233.3.3.3    234.4.4.4                      profile                      :

```
Ruijie(config)# ip igmp profile 1
Ruijie(config-profile)# range 233.3.3.3 234.4.4.4
```

<b>ip igmp profile</b>		profile
<b>deny</b>	profile	deny
<b>permit</b>	profile	permit

### 15.1.3 deny

profile    profile  
 deny  
**deny**

profile                      deny

profile

profile                      range

233.3.3.3    profile                      :

```
Ruijie(config)# ip igmp profile 1
Ruijie(config-profile)# range 233.3.3.3
Ruijie(config-profile)# deny
```

<b>ip igmp profile</b>	profile
<b>range</b>	

### 15.1.4 permit

profile

```

        igmp snooping          ivgl          ip
igmp snooping ivgl      no ip igmp snooping      igmp snooping

ip igmp snooping ivgl
no ip igmp snooping
    
```

disable

```

                VLAN
            VLAN
        VLAN          VLAN
    
```

```

                igmp snooping      ivgl
Ruijie(config)# ip igmp snooping ivgl
    
```

<b>ip igmp snooping svgl</b>	igmp snooping svgl
<b>ip igmp snooping ivgl-svgl</b>	igmp snooping

### 15.1.6 ip igmp snooping svgl

```

        igmp snooping          SVGL          ip
igmp snooping svgl      no ip igmp snooping      igmp snooping

ip igmp snooping svgl
no ip igmp snooping
    
```

disable

VLAN ~~24~~



---

---

**ip igmp snooping dyn-mr-aging-time**  
**no ip igmp snooping dyn-mr-aging-time**

**ip igmp snooping dyn-mr-aging-time** *num*  
**no ip igmp snooping dyn-mr-aging-time**

<i>num</i>	1-3600

300s

PIM Hello IGMP

500s

Ruijie(config)# **ip igmp snooping dyn-mr-aging-time 500**

### 15.1.10 ip igmp snooping query-max-response-time

**ip igmp snooping query-max-response-time** IGMP  
**!**

```

IGMP
0
IGMP
Snooping
IGMP
0
IGMP Snooping
IGMPv3
IGMP
15s
Ruijie(config)# ip igmp snooping
query-max-response-time 15
    
```

### 15.1.11 ip igmp snooping vlan mrouter learn pim-dvmrp

```

IGMP Query      DVMRP Probe
PIM              ip igmp
snooping vlan mrouter learn pim-dvmrp      no

ip igmp snooping vlan vid mrouter learn pim-dvmrp
no ip igmp snooping vlan vid mrouter learn pim-dvmrp
    
```

<i>vid</i>	VLAN IGMP Snooping VLAN ID

VLAN  
 VLAN no

snooping igmp

Ruijie(config)# **ip igmp snooping vlan 1 mrouter learn pim-dvmrp**

<b>ip igmp snooping vlan mrouter interface</b>	

### 15.1.12 ip igmp snooping vlan mrouter interface

**ip igmp snooping vlan mrouter interface** no  
**ip igmp snooping vlan vid mrouter interface interface-id**  
**no ip igmp snooping vlan vid mrouter interface interface-id**

<i>vid</i>	vlan id
<i>interface-id</i>	

IP



<b>ip igmp snooping vlan mrouter interface</b>	

### 15.1.14 ip igmp snooping fast-leave enable

```

        igmp snooping fast-leave
snooping fast-leave enable          no          ip igmp
fast-leave                               igmp snooping
    
```

```

ip igmp snooping fast-leave enable
no ip igmp snooping fast-leave enable
    
```

QSa@@ 'VÄ' DE

**no ip igmp snooping suppression enable**

disable

IGMP  
Report                      vlan                      IGMP Report                      IGMP  
ë

IP

```
Ruijie(config)# ip igmp snooping limit-ipmc vlan 1
address 233.3.3.3 server 1.1.1.2
```

ip igmp snooping source-check default-server	IP IP

### 15.1.17 ip igmp snooping filter

profile            no            profile

0/1 profile 1

```
Ruijie(config)# interface fastEthernet 0/1
Ruijie(config-if)# ip igmp snooping filter 1
```

ip igmp profile	profile

### 15.1.18 ip igmp snooping max-groups

```
ip igmp snooping max-groups no ip
ip igmp snooping max-groups number
no ip igmp snooping max-groups
```

Number: 0 – 1024

bèL\$ Ä

y ´r T õaN0 @

## 15.2

### 15.2.1 show ip igmp snooping

igmp snooping

**Show ip igmp snooping [gda-table | interfaces | mrouter/ statistics [vlan *vlan-id* ]**

	igmp snooping
<b>gda-table</b>	
<b>interfaces</b>	filter max-group
<b>mrouter</b>	
<b>statistics</b>	snooping

EXEC

```

                                fa0/1          100
Ruijie(config-if)# ip igmp snooping gda-table
Abbr:M - mrouter
      D - dynamic
      S - static
VLAN   Address                Member ports
-----
1      233.3.3.3                Gi0/2(S)
2      234.4.4.4                Gi0/11(S)
1      233.4.4.4                Ag2(S)
    
```

## 15.2.2 show ip igmp profile

profile

**show ip igmp profile**

**show ip igmp profile** *profile-number*

	profile
<i>profile-number</i>	profile

EXEC

profile

fa0/1 100

Ruijie(config-if)#**show ip igmp profile**

Profile 1

Permit

range 224.0.1.0, 239.255.255.255

EXEC

Ruijie# **clear ip igmp snooping gda-table**

### 15.2.4 debug igmp-snp

igmp no

- debug igmp-snp**
- debug igmp-snp event**
- debug igmp-snp packet**
- debug igmp-snp msf**
- debug igmp-snp warning**
- undebug igmp-snp**
- undebug igmp-snp event**
- undebug igmp-snp packet**
- undebug igmp-snp msf**
- undebug igmp-snp warning**

	IGMP Snooping
<b>event</b>	IGMP Snooping
<b>packet</b>	IGMP Snooping
<b>msf</b>	IGMP Snooping

<b>warning</b>	IGMP Snooping
----------------	---------------

EXEC

# 16 MSTP

## 16.1

### 16.1.1 spanning-tree

MSTP	no	MSTP	MSTP
		spanning-tree	no

```
show spanning-tree      STP
spanning-tree mst cost  STP      PathCost
spanning-tree tx-hold-count STP      TxHoldCount
```

### 16.1.2 spanning-tree bpdupfilter

```
disabled          BPDU filter          enabled
spanning-tree bpdupfilter [enabled | disabled]

enabled          BPDU filter
Disabled        BPDU filter
```

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# spanning-tree bpdupfilter enable
```

```
show spanning-tree interface      STP
```

### 16.1.3 spanning-tree bpduguard

```
disabled          BPDU Guard          enabled
spanning-tree bpduguard [enabled | disabled]

enabled          BPDU Guard
disabled        BPDU Guard
```

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# spanning-tree bpduguard enable
```

```
show spanning-tree interface STP
```

### 16.1.4 spanning-tree link-type

“ ” no

```
spanning-tree link-type [point-to-point | shared]
```

```
no spanning-tree link-type
```

```
point-to-point point-to-point.
```

```
Shared
```

**spanning-tree max-hops** *hop-count*

**no spanning-tree max-hops**

*hop-count* BPDU 1 40

*hop-count* 20

.

Ruijie(config)# **spanning-tree mode stp**

**show spanning-tree**

**revision** *version*

MST

0 65535

Instance no

**spanning-tree [mst instance-id] cost cost**

**no spanning-tree [mst instance-id] cost**

*instance-id* Instance 0 64

*cost* 1 200 000 000

Instance-ID 0

Interface

- 1000 Mbps—20000
- 100 Mbps—200000
- 10 Mbps—2000000

cost

Instance 3 400

Ruijie(config)# **interface gigabitethernet 1/1**

Ruijie(config-if)# **spanning-tree mst 3 cost 400**

**show spanning-tree mst interface interface-id**

**show spanning-tree mst** MSTP

**spanning-tree mst port-priority**

**spanning-tree** [**mst** *instance-id*] **port-priority** *priority*

**no spanning-tree** [**mst** *instance-id*] **port-priority**

*Instance-id* Instance 0 64

*priority*

<i>instance-id</i>	Instance	0
--------------------	----------	---

## 16.1.12 spanning-tree tx-hold-count

STP	TxHoldCount	BPDU
	no	

**spanning-tree tx-hold-count** *tx-hold-count*

**no spanning-tree tx-hold-count**

**show spanning-tree interface** STP

### 16.1.14 spanning-tree portfast

```
Portfast disabled
Portfast
spanning-tree portfast [disabled]
disabled Portfast
```

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# spanning-tree portfast
```

**show spanning-tree interface** STP

### 16.1.15 spanning-tree portfast bpduguard default

```
BPDU guard no BPDU
guard
spanning-tree portfast bpduguard default
no spanning-tree portfast bpduguard default
```

BPDU Guard.

---

BPDU guard	BPDU	error-disabled
------------	------	----------------

**show spanning-tree**

```
Ruijie(config)# spanning-tree portfast bpduguard  
default
```

**show spanning-tree interface** STP

### 16.1.16 spanning-tree portfast bpduguard default

BPDU filter	no	BPDU
-------------	----	------

filter

**spanning-tree portfast bpduguard default**

**no spanning-tree portfast bpduguard default**

BPDU filter

BPDU Filter	BPDU	<b>show</b>
-------------	------	-------------

**spanning-tree**

```
Ruijie(config)# spanning-tree portfast bpduguard  
default
```

**show spanning-tree interface** STP

### 16.1.17 spanning-tree portfast default

Portfast	no
----------	----

Portfast

**spanning-tree portfast default**

**no spanning-tree portfast default**

Portfast

Ruijie(config)# **spanning-tree portfast default**

tc-guard

```
Ruijie(config)# spanning-tree tc-protection tc-guard
```

### 16.1.20 spanning-tree tc-guard

```
tc-guard no tc-guard
tc-guard tc
```

**spanning-tree tc-guard**

**no spanning-tree tc-guard**

tc-guard

```
Ruijie(config-if)# spanning-tree tc-guard
```

### 16.1.21 spanning-tree guard root

```
root guard no root guard
root guard
```

**spanning-tree guard root**

**no spanning-tree guard root**

MSTP

loop guard

```
Ruijie(config-if)# spanning-tree guard loop
```

### 16.1.24 spanning-tree guard none

guard

no

guard

```
spanning-tree guard none
```

```
no spanning-tree guard none
```

guard

```
Ruijie(config-if)# spanning-tree guard none
```

### 16.1.25 spanning-tree autoedge

Autoedge

disabled

Autoedge

```
spanning-tree autoedge [disabled]
```

disabled

Autoedge

```
Ruijie(config)# interface gigabitethernet 1/1  
Ruijie(config-if)# spanning-tree autoedge disabled
```

```
show spanning-tree interface          STP
```

## **16.1.26 bpdu src-mac-check**

```
bpdu   TJ3[m8
```



```
Ruijie(config-if)#logging event status
```

## 16.2

### 16.2.1 show spanning-tree

```
show spanning-tree [summary | forward-time | hello-time | max-age  
| inconsistentports| tx-hold-count | pathcost method | max_hops]
```

```
summary          MSTP      instance  
Inconsistentports                block  
forward-time      BridgeForwardDelay  
hello-time        BridgeHelloTime  
max-age           BridgeMaxAge  
max-hops          instance  
tx-hold-count     TxHoldCount  
pathcost method
```

```
Ruijie# show spanning-tree hello-time
```

```
spanningtree pathcost method  
spanning-tree forward-time      BridgeForwardDelay  
spanning-tree hello-time        BridgeHelloTime  
spanning-tree max-age           BridgeMaxAge  
spanning-tree max-hops          instance  
spanning-tree tx-hold-count     TxHoldCount
```

## 16.2.2 show spanning-tree interface

STP

**show spanning-tree interface** *interface-id* [{**bpdufilter** | **portfast** |

Ruijie# **show spanning-tree mst configuration**

<b>spanning-tree mst configuration</b>	MST region
<b>spanning-tree mst cost</b>	instance
<b>spanning-tree mst max-hops</b>	instance
<b>spanning-tree mst priority</b>	instance
<b>spanning-tree mst port-priority</b>	instance



**show monitor**

SPAN

SPAN

1.

1

1

8

```

Ruijie(config)# no monitor session 1
Ruijie(config)# monitor session 1 source interface
gigabitEthernet 1/1 both
Ruijie(config)# monitor session 1 destination interface
gigabitEthernet 1/8

```

r

S3760

<b>show monitor</b>	SPAN

## 17.2 show monitor

SPAN

**show monitor** [session *session\_number*]

SPAN

**session** *session\_number* SPAN**show monitor**

SPAN

1

```
Ruijie# show monitor session 1
sess-num: 1
src-intf:
GigabitEthernet 3/1 frame-type Both
dest-intf:
GigabitEthernet 3/8
```

<b>monitor session</b>	SPAN

# 18 RSPAN

## 18.1

### 18.1.1 monitor session

RSPAN

**monitor session** *session\_num* {**remote-destination** | **remote-source**}

**monitor session** *session-num* **destination remote vlan** *vlan-id*  
**[reflector-port] interface** *interface-name* [

<b>show monitor</b>	

## 18.1.2 remote-span

### RSPAN VLAN

[no] **remote-span**

Vlan

**end**

Ctrl+C

**exit**

Ruijie(config)# **vlan 5**

Ruijie(config)# **remote-span**

--	--

# 19 IP

## 19.1

- **ip address**
- **ip unnumbered**


### 19.1.1 ip address

IP                      no                      IP

**ip address** *ip-address network-mask* [ **secondary** ]

**no ip address** *ip-address network-mask* [ **secondary** ]



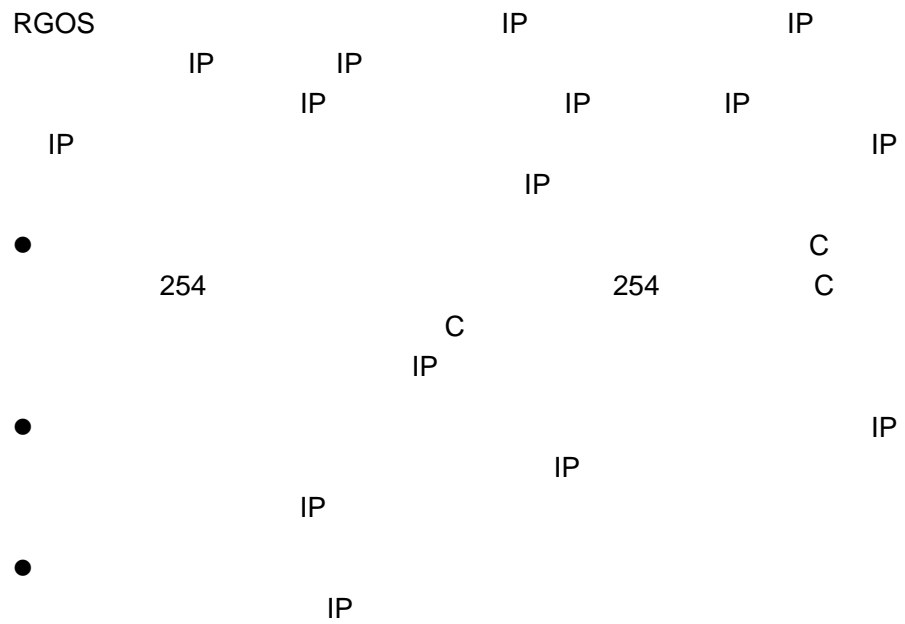

```

255.255.255.0
ip address 10.10.10.1 255.255.255.0

```

<b>show interface</b>	

secondary IP

### 19.1.2 ip unnumbered

IP IP no

```

ip unnumbered interface-type interface-number
no ip unnumbered interface-type interface-number

```

<i>interface-type</i>	
<i>interface-number</i>	

IP IP IP IP IP IP IP IP

- 
- SLIP HDLC PPP LAPB Frame-relay
- X.25
- IP ping SNMP
- 

FastEthernet 0/1

IP

`ip unnumbered fastEthernet 0/1`

<b>show interface</b>	

## 19.2

- arp
- arp retry interval
- arp retry times
- arp trusted NUM
- arp trusted aging
- arp unresolve
- arp gratuitous-send interval
- arp timeout
- ip proxy-arp
- service trustedarp

## 19.2.1 arp

```

no ARP IP MAC
no ARP MAC
arp ip-address MAC-address type [ alias ]
no arp ip-address MAC-address type [ alias ]

```

<i>ip-address</i>	MAC	IP	
<i>MAC-address</i>		48	
<i>type</i>	ARP		arpa
<b>alias</b>		RGOS	IP

ARP  
**clear arp-cache**

ARP  
 ARP

ARP

arp 1.1.1.1 4e54.3800.0002 arpa

<b>clear arp-cache</b>	ARP

### 19.2.2 arp retry interval

arp IP  
 2 ARP no  
 1 ARP

**arp retry interval** *seconds*

**no arp retry interval**

<i>seconds</i>	<1-3600>,ARP 1 ---3600 1


ARP 1

ARP ARP ARP

ARP 30s

arp retry interval 30

IP



ÀÀÀ PG C1A5Hm14

ARP

no

**arp trusted** *number***no arp trusted**

<i>number</i>	ARP <10-4096>

ARP

ARP  
ARP

1000

ARP

arp trusted 1000

<b>service trustedarp</b>	ARP

**19.2.5 arp trusted aging**

ARP

no


**arp trusted aging****no arp trusted aging**

GSN    ARP

ARP

**arp timeout**

ARP

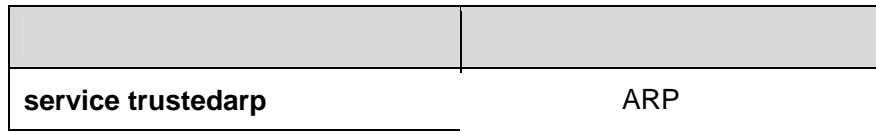

## 19.2.7 arp gratuitous-send interval

arp no

**arp gratuitous-send interval** *seconds*

**no arp gratuitous-send**

<i>seconds</i>	ARP <1-3600>

ARP

ARP

SVI 1

ARP

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# arp gratuitous-send interval 1
```

SVI 1

ARP

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# no arp gratuitous-send
```

## 19.2.8 arp timeout

IP

---

ARP

IP

---

10.2(3)

ARP

IP  
ARP  
ARP

ARP

3) tc

service trustedarp

config  
service trustedarp

s32

## 19.3

- ip broadcast-addresss
- ip directed-broadcast

### 19.3.1 ip broadcast-addresss

**ip broadcast-addresss**

no

**ip broadcast-addresss** *ip-address*

**no ip broadcast-addresss** *ip-address*

<i>ip-address</i>	IP

IP 255.255.255.255

IP 1 255.255.255.255  
RGOS IP  
1

IP 0.0.0.0

IP


---

```
ip broadcast-address 0.0.0.0
```

### 19.3.2 ip directed-broadcast

IP

ip

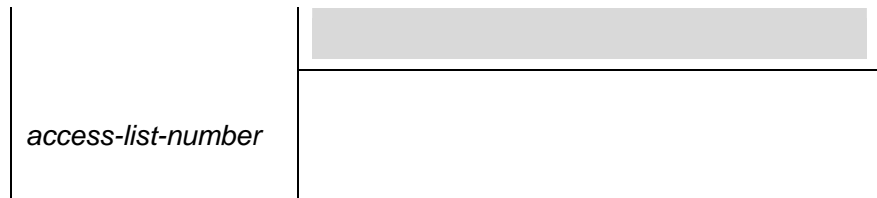

1-199 1300 -

IP

IP

IP

172.16.16.255



## FastEthernet 0/1

```
interface fastEthernet 0/1
ip directed-broadcast
```

## 19.4 IP

## IP

- clear arp-cache
- show arp
- show arp counter
- show arp timeout
- clear ip route
- show ip arp
- show ip interface
- show ip redirects

### 19.4.1 clear arp-cache

```
ARP ARP IP
clear arp-cache
```

```
clear arp-cache [A.B.C.D] | interface interface-name]
```

## ARP

r

```
clear arp mac ( IP ) ARP
clear arp 1s
ARP
```

ARP

clear arp-cache

ARP 1.1.1.1

clear arp-cache 1.1.1.1

SVI1 ARP

clear arp-cache interface Vlan 1

```

Internet 192.168.195.68 0 0013.20a5.7a5f
arpa VLAN 1
Internet 192.168.195.67 0 001a.a0b5.378d
arpa VLAN 1
Internet 192.168.195.65 0 0018.8b7b.713e
arpa VLAN 1
Internet 192.168.195.64 0 0018.8b7b.9106
arpa VLAN 1
Internet 192.168.195.63 0 001a.a0b5.3990
arpa VLAN 1
Internet 192.168.195.62 0 001a.a0b5.0b25
arpa VLAN 1
Internet 192.168.195.5 -- 00d0.f822.33b1
arpa VLAN 1

```

## ARP

Protocol	Internet
Address	IP
Age (min)	ARP “_”
Hardware	IP
Type	ARPA
Interface	IP

```
show arp 192.168.195.68
```

```

Ruijie# show arp 192.168.195.68
Protocol Address Age(min) Hardware Type
Interface
Internet 192.168.195.68 1 0013.20a5.7a5f arpa
VLAN 1

```

```
show arp 192.168.195.0 255.255.255.0
```

```

Ruijie# show arp 192.168.195.0 255.255.255.0
Protocol Address Age(min) Hardware Type
Interface
Internet 192.168.195.64 0 0018.8b7b.9106 arpa
VLAN 1
Internet 192.168.195.2 1 00d0.f8ff.f00e arpa
VLAN 1
Internet 192.168.195.5 -- 00d0.f822.33b1 arpa
VLAN 1

```

---

```
Internet 192.168.195.1 0 00d0.f8a6.5af7 arpa
VLAN 1
Internet 192.168.195.51 1 0018.8b82.8691 arpa
VLAN 1
```

#### **show arp 001a.a0b5.378d**

```
Ruijie# show arp 001a.a0b5.378d
Protocol Address Age(min) Hardware Type
Interface
Internet 192.168.195.67 4 001a.a0b5.378d arpa
VLAN 1
```

### 19.4.3 show arp counter

```
ARP arp
```

#### **show arp counter**

#### **show arp counter**

```
Ruijie# show arp counter
The Arp Entry counter:0
The Unresolve Arp Entry:0
```

```
ARP
```

### 19.4.4 show arp detail

```
ARP
```

#### **show arp detail**

```
show arp detail interface-type interface-number
```

**show arp detail [vrf vrfname] [ip [mask] | mac-address | static | complete | incomplete]**

**show arp detail trusted [ip [mask]]**

	ARP		
<i>interface-type interface-number</i>			
<b>vrf vrfname</b>			
<i>ip</i>	ip	ip	ARP
<i>ip mask</i>	ip mask		ARP
<i>mac-address</i>	mac		ARP
<b>static</b>	arp		
<b>complete</b>	arp		
<b>incomplete</b>	arp		
<b>trusted</b>	ARP		

ARP

ARP

### show arp detail

Ruijie# **show arp detail**

IP Address	MAC Address	Type	Age(min)	Interface	Port
20.1.1.1	000f.e200.0001	Static	-- --	--	
20.1.1.1	000f.e200.0001	Static	-- VI3	--	
20.1.1.1	000f.e200.0001	Static	-- VI3	Gi2/0/1	
193.1.1.70	00e0.fe50.6503	Dynamic	1 VI3	Gi2/0/1	
192.168.0.1	0012.a990.2241	Dynamic	10 Gi2/0/3	Gi2/0/3	
192.168.0.1	0012.a990.2241	Dynamic	20 Ag1	Ag1	
192.168.0.1	0012.a990.2241	Dynamic	30 VI2	Ag2	
192.168.0.39	0012.a990.2241	Local	-- VI3	--	
192.168.0.39	0012.a990.2241	Local	-- Gi2/0/3	--	
192.168.0.1	0012.a990.2241	Local	-- VI3	--	



-----  
VLAN 1

3600

ARP

## ARP

**show ip arp****show ip arp**

```

Ruijie# show ip arp
Protocol Address      Age(min)Hardware      Type
Interface
Internet 192.168.7.233    23      0007.e9d9.0488    ARPA
FastEthernet 0/0
Internet 192.168.7.112   10      0050.eb08.6617    ARPA
FastEthernet 0/0
Internet 192.168.7.79    12      00d0.f808.3d5c    ARPA
FastEthernet 0/0
Internet 192.168.7.1     50      00d0.f84e.1c7f    ARPA
FastEthernet 0/0
Internet 192.168.7.215   36      00d0.f80d.1090    ARPA
FastEthernet 0/0
Internet 192.168.7.127   0       0060.97bd.ebee    ARPA
FastEthernet 0/0
Internet 192.168.7.195   57      0060.97bd.ef2d    ARPA
FastEthernet 0/0
Internet 192.168.7.183  --      00d0.f8fb.108b    ARPA
FastEthernet 0/0

```

## ARP

Protocol	Internet
Address	IP
Age (min)	ARP “_”
Hardware	IP
Type	ARPA
Interface	IP

## 19.4.8 show ip interface

IP

**show ip interface** [ *interface-type interface-number* ]

<i>Interface-type</i>	
<i>Interface-number</i>	

RGOS

RGOS

RGOS

UP

UP

### show ip interface

```
Ruijie# show ip interface FastEthernet 0/1
IP interface state is: UP
IP interface type is: BROADCAST
IP interface metric is: 0
IP interface MTU is: 1500
IP address is:
192.168.5.133/24 (primary)
IP address negotiate is: OFF
Forward direct-boardcast is: ON
ICMP mask reply is: ON
Send ICMP redirect is: ON
Send ICMP unreachable is: ON
```

DHCP relay is: OFF  
Fast switch is: ON  
Route horizontal-split is: ON  
Help address is: 0.0.0.0  
Proxy ARP is: ON  
Outgoing access list is not set.  
Inbound access list is not set.

**show ip redirects**



## 20.1.2 ip mask-reply

```
RGOS      ICMP
ip mask-reply      no      ICMP
no ip mask-reply
```

```
ICMP
```

```
ICMP
```

```
ICMP
```

```
FastEthernet 0/1
```

```
ICMP
```

```
interface fastEthernet 0/1
ip mask-reply
```

## 20.1.3 ip mtu

```
IP      MTU      ip mtu
no
ip mtu bytes
no ip mtu
```





ICMP

RGOS

ICMP

FastEthernet 0/1

ICMP

```
interface fastEthernet 0/1
no ip redirects
```

### 20.1.5 ip source-route

RGOS

IP

ip

**source-route** no

**ip source-route**

**no ip source-route**

RGOS

IP

IP

IP

RFC 791

ICMP

RGOS

IP

IP

no ip source-route

## 20.1.6 ip unreachable

RGOS  
unreachables

ICMP

ip

RGOS 6.0 R6 (2008-04-15) IP unreachable (R6) !sRP"dl Qs0600

# 21 DHCP

## 21.1 DHCP

### 21.1.1 bootfile

DHCP

**bootfile**                      **no**

**bootfile** *file-name*

**no bootfile**

<i>file-name</i>	

DHCP

DHCP

DHCP

TFTP

DHCP

**next-server**

router.conf

bootfile router.conf

<b>ip dhcp pool</b>	DHCP                      DHCP

<b>next-server</b>	DHCP IP
--------------------	------------

### 21.1.2 client-identifier

DHCP

**client-identifier**

**no**

DHCP

**client-identifier** *unique-identifier*

**no client-identifier**

--	--

<b>hardware-address</b>	DHCP
<b>host</b>	IP DHCP
<b>ip dhcp pool</b>	DHCP DHCP

### 21.1.3 client-name

```

DHCP                               DHCP           client-name
no                                DHCP

```

**client-name** *client-name*

**no client-name**

<i>client-name</i>	DHCP ASCII river DHCP river.i-net.com.cn

DHCP

DHCP

DHCP

river

client-name river

<b>host</b>	IP DHCP

<b>ip dhcp pool</b>	DHCP DHCP
---------------------	--------------

### 21.1.4 default-router

DHCP  
**default-router**                    **no**                    DHCP  
**default-router** *ip-address* [ *ip-address2...ip-address8* ]  
**no default-router**

<i>ip-address</i>	IP
<i>ip-address2...ip-address8</i>	8

DHCP

DHCP                    DHCP                    DHCP  
 DHCP                    IP

192.168.12.1

default-router 192.168.12.1

**dns-server** { *ip-address* [ *ip-address2...ip-address8* ] |  
**use-dhcp-client** *interface-type interface-number* }  
**no dns-server**

<i>ip-address</i>	DNS IP
<i>ip-address2...ip-address8</i>	8 DNS
<b>use-dhcp-client</b> <i>interface-type</i> <i>interface-number</i>	RGOS DHCP DNS DHCP DNS

DNS

DHCP

DNS DHCP  
 DNS DNS  
 RGOS DHCP DNS  
 DHCP DHCP  
 DHCP DNS 192.168.12.3  
 dns-server 192.168.12.3

<b>domain-name</b>	DHCP
<b>ip address dhcp</b>	DHCP IP
<b>ip dhcp pool</b>	DHCP DHCP

### 21.1.6 domain-name

DHCP  
no

DHCP

domain-name

domain-name *domain-name*

no domain-name

<i>domain-name</i>	DHCP

DHCP

DHCP

DHCP

i-net.com.cn

domain-name i-net.com.cn

<b>dns-server</b>	DHCP      DNS
<b>ip dhcp pool</b>	DHCP                  DHCP

### 21.1.7 hardware-address

DHCP

DHCP

**hardware-address**                  **no**

**hardware-address** *hardware-ad9(JjET1cdd09e0>5.7<1e0b09e2>5.7<34d40db309e1>5.7*

<i>type</i>	DHCP
	✧ ethernet
	✧ ieee802
	✧ 1 10M ethernet
	✧ 6 IEEE 802

ethernet

DHCP

DHCP

ethernet MAC 00d0.f838.bf3d

hardware-address 00d0.f838.bf3d

<b>client-identifier</b>	DHCP
<b>host</b>	IP DHCP

**ip dhcp pool** DHCP 1 T Tm8 2 <1

<i>ip-address</i>	DHCP IP
<i>netmask</i>	DHCP

IP

DHCP

DHCP IP

A 255.0.0.0 B 255.255.0

C 255.255.255.0

DHCP

IP 192.168.12.91

255.255.255.240

host 192.168.12.91 255.255.255.240

<b>client-identifier</b>	DHCP
<b>hardware-address</b>	DHCP
<b>ip dhcp pool</b>	DHCP DHCP

### 21.1.9 ip address dhcp

PPP HDLC FR DHCP IP

**ip address dhcp no**

**ip address dhcp**

**no ip address dhcp**

DHCP IP

```

RGOS          DHCP          IP          DHCP
              1 DHCP      1          2 DHCP
              3          3 DHCP      6 DNS
4 DHCP      15          DHCP      44 WINS
RGOS          PPP FR HDLC          dhcp
    
```

FastEthernet 0 IP

```

interface fastEthernet 0
ip address dhcp
    
```

<b>dns-server</b>	DHCP DNS
<b>ip dhcp pool</b>	DHCP DHCP ê

cpD

IP DHCP IP DHCP  
 DHCP IP DHCP

DHCP 192.168.12.100~150  
 IP

```
ip dhcp excluded-address 192.168.12.100 192.168.12.150
```

<b>ip dhcp pool</b>	DHCP DHCP
<b>network DHCP</b>	DHCP

### 21.1.11 ip dhcp force-send-nak

DHCP NAK  
 no NAK

```
ip dhcp force-send-nak
no ip dhcp force-send-nak
```

RFC2131 DHCP Request  
 NAK IP IP Request

```

DHCP          NAK          DHCP          DHCP
                    DHCP
                    NAK    DHCP          Request
                    IP     IP             DHCP

                    DHCP
                    NAK          IP

                    DHCP          NAK          DHCP

                    DHCP          NAK

ip dhcp force-send-nak
    
```

<b>ip dhcp pool</b>	DHCP DHCP
<b>service dhcp</b>	DHCP

### 21.1.12 ip dhcp ping packet

```

DHCP          ping
ip dhcp ping packet      no

ip dhcp ping packet [ number ]
no ip dhcp ping packet
    
```

<i>number</i>	ping      0 10 0 ping              ping

```
ping      2
```

```

DHCP          DHCP          IP          ping
DHCP          Ping
10
ping          3
ip dhcp ping packets 3
    
```

<b>clear ip dhcp conflict</b>	DHCP
<b>ip dhcp ping timeout</b>	DHCP ping ping
<b>show ip dhcp conflict</b>	DHCP

### 21.1.13 ip dhcp ping timeout

```

DHCP ping
ip dhcp ping timeout no
    
```

```

ip dhcp ping timeout milli-seconds
no ip dhcp ping timeout
    
```

<i>milli-seconds</i>	DHCP ping 100 10000

500

ping

ping

600ms

mypool0 DHCP

ip dhcp pool mypool0

<b>host</b>	IP DHCP
<b>ip dhcp excluded-address</b>	DHCP IP
<b>network DHCP</b>	DHCP

### 21.1.15 lease

DHCP

DHCP

**lease no****lease { days [ hours ] [ minutes ] | infinite }****no lease**

<i>days</i>	
<i>hours</i>	
<i>minutes</i>	
<b>infinite</b>	

DHCP

DHCP

DHCP

DHCP

1

```
lease 0 1
```

```
                DHCP      1
```

```
lease 0 0 1
```

<b>ip dhcp pool</b>	DHCP	DHCP

### 21.1.16 netbios-name-server

```
                DHCP      NETBIOS  WINS      DHCP
netbios-name-server          no      WINS
```

```
netbios-name-server ip-address [ ip-res2...(padv)4.3d(es8s)T/JT2 1 Tf121.44 0 TD0.002
```

<b>ip address dhcp</b>	DHCP	IP
<b>ip dhcp pool</b>	DHCP	DHCP

### 21.1.17 netbios-node-type

DHCP                      NetBIOS                      DHCP  
**netbios-node-type**                      **no**                      NetBIOS

**netbios-node-type** *type*

**no netbios-node-type**

	NetBIOS 0~FF
<i>type</i>	<ul style="list-style-type: none"> <li>◇ 1      b-node</li> <li>◇ 2      p-node</li> <li>◇ 4      m-node</li> <li>◇ 8      h-node</li>   <li>◇ b-node</li> <li>◇ p-node</li> <li>◇ m-node</li> <li>◇ h-node</li> </ul>

NetBIOS


DHCP

DHCP	NetBIOS	1 Broadcast
	NetBIOS	2 Peer-to-peer
	WINS	3 Mixed
		WINS
	4 Hybrid	WINS
NetBIOS		NetBIOS



**show ip dhcp binding**  
**show ip dhcp conflict**

```
                DHCP                192.168.12.0  
255.255.255.240  
network 192.168.12.0 255.255.255.240
```



**ip dhcp excluded-address**                      DHCP

```
next-server 192.168.12.4
```

<b>bootfile</b>	DHCP
<b>ip dhcp pool</b>	DHCP                      DHCP
<b>ip help-address</b>	Helper
<b>option</b>	RGOS      DHCP

### 21.1.20 option

```

DHCP                      DHCP                      option
no                      option
option code { ascii string | hex string | ip ip-address }
no option

```



```

          19
          IP      0      IP      1      DHCP
          DHCP
option 19 hex 1

          33
          DHCP      DHCP
172.16.12.0      192.168.12.12 2      172.16.16.0
192.168.12.16
option 33 ip 172.16.12.0 192.168.12.12 172.16.16.0
192.168.12.16
    
```

<b>ip dhcp pool</b>	DHCP DHCP

### 21.1.21 service dhcp

```

          DHCP
dhcp      no      DHCP      service
service dhcp
no service dhcp
    
```

DHCP

```

DHCP      IP      DNS
          DHCP      DHCP
          DHCP      DHCP      DHCP
          DHCP
    
```

## DHCP

```
service dhcp
```

<b>show ip dhcp server statistics</b>	DHCP

## 21.2

- **clear ip dhcp binding**
- **clear ip dhcp conflict**
- **clear ip dhcp server statistics**
- **debug ip dhcp client**
- **debug ip dhcp server**
- **show dhcp lease**
- **show ip dhcp binding**
- **show ip dhcp conflict**
- **show ip dhcp server statistics**

### 21.2.1 clear ip dhcp binding

DHCP

clear ip dhcp binding

```
clear ip dhcp binding { * | ip-address }
```

*	DHCP
<i>ip-address</i>	IP

```
dhcp pool
```

DHCP

DHCP

no ip

IP 192.168.12.100 DHCP

```
clear ip dhcp binding 192.168.12.100
```

<b>show ip dhcp binding</b>	DHCP

## 21.2.2 clear ip dhcp conflict

DHCP

**clear ip dhcp conflict**

```
clear ip dhcp conflict { * | ip-address }
```

*	DHCP
<i>ip-address</i>	IP

DHCP

ping

DHCP

ARP

**clear ip dhcp conflict**

```
clear ip dhcp conflict *
```

<b>ip dhcp ping packets</b>	DHCP ping
<b>show ip dhcp conflict</b>	DHCP

### 21.2.3 clear ip dhcp server statistics

```
DHCP server statistics
clear ip dhcp server statistics
```

```
DHCP ip dhcp server statistics
DHCP DHCP clear
```

```
DHCP
clear ip dhcp server statistics
```

show ip dhcp server statistics	DHCP

### 21.2.4 debug ip dhcp client

```
DHCP Client debug ip dhcp client
debug ip dhcp client
no debug ip dhcp client
```

dhcp client

dhcp

debug ip dhcp client

## 21.2.5 debug ip dhcp server

DHCP Server

**debug ip dhcp server**

**debug ip dhcp server**

**no debug ip dhcp server**

dhcp server

dhcp

debug ip dhcp server

## 21.2.6 show dhcp lease

DHCP

EXEC

**show dhcp lease**

**show dhcp lease**

IP IP  
IP IP

**show dhcp lease**

```
Ruijie# show dhcp lease  
Temp IP addr: 192.168.5.71 for peer on Interface:  
FastEthernet0/0  
Temp sub net mask: 255.255.255.0
```

IP  
IP

IP

### show ip dhcp binding

Ruijie# **show ip dhcp binding**

```

IP address      Client-Id/      Lease expiration  Type
                Hardware address
192.168.1.2    00d0.f866.4777  IDLE              Manual
  
```

	DHCP	IP
IP address		
Client-Id/ Hardware address	DHCP	client identifier
Lease expiration	IDLE	Infinite DHCP
Type	Manual	Automatic

<b>clear ip dhcp binding</b>	DHCP
------------------------------	------

### 21.2.8 show ip dhcp conflict

DHCP

EXEC

**show ip dhcp conflict**

**show ip dhcp conflict**

DHCP

**show ip dhcp conflict**

```
Ruijie# show ip dhcp conflict
IP address      Detection Method
192.168.12.1    Ping
```

```
dhcpd excluded ipaddress
192.168.12.100
```

IP address	DHCP IP
Detection Method	
dhcpd excluded ipaddress	

clear ip dhcp confict	DHCP

**21.2.9 show ip dhcp server statistics**

DHCP

EXEC

**show ip dhcp**




# 22 DHCP Relay

## 22.1 DHCP Relay

DHCP

- **service dhcp**
- **ip helper-address**

### 22.1.1 service dhcp

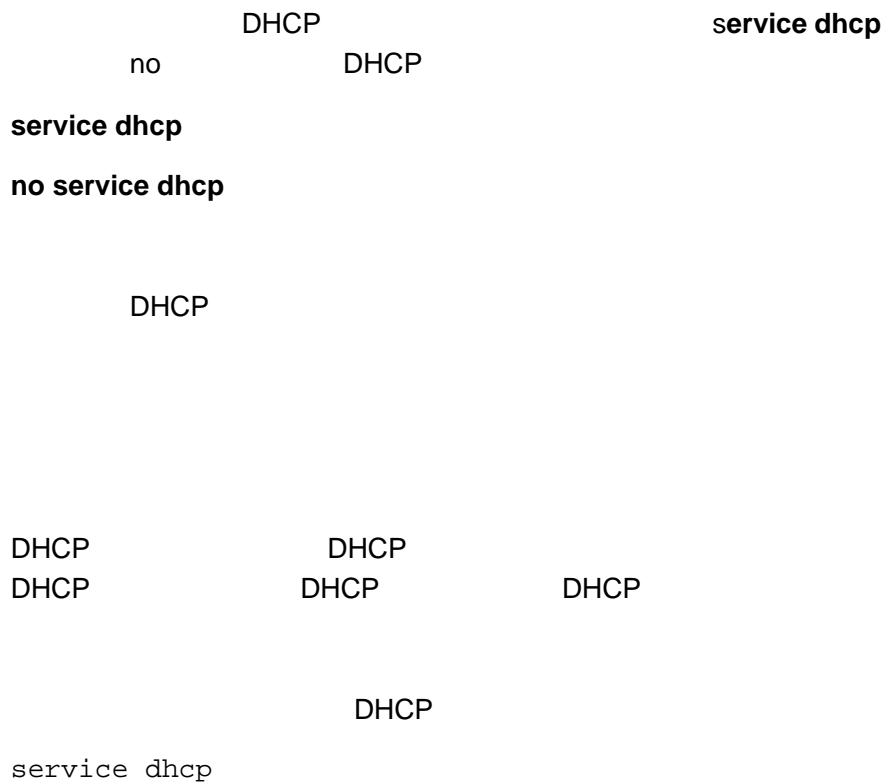

<b>ip helper-address [vrf] A.B.C.D</b>	DHCP server

### 22.1.2 ip helper-address

DHCP no

DHCP

/

```

        dhcp
    vrf
vrf
        vrf
        vrf
        vrf
61.154.26.49    vrf    local    vrf    192.168.197.1
ip helper-address 61.154.26.49
ip helper-address vrf local 192.168.197.1
    
```

<b>service dhcp</b>	DHCP

### 22.1.3 ip dhcp relay information option dot1x

```

        dhcp option dot1x
    dhcp option dot1x
        no
    
```

DHCP relay 802.1x



server-id option                      DHCP REQUEST  
server

Ip dhcp relay check server-id

<b>Service dhcp</b>	DHCP

<b>service dhcp</b>	DHCP
---------------------	------

# 23 DNS

## 23.1

### 23.1.1 ip domain-lookup

DNS

no

DNS

**ip domain-lookup**

**no ip domain-lookup**

DNS

DNS

DNS

**no ip name-server** [*ip-address*]

<i>ip-address</i>	IP

DNS Server IP DNS  
Server Server  
Server DNS  
6 DNS Server ip-address  
DNS

Ruijie(config)# **ip name-server** 192.168.5.134

<b>show hosts</b>	DNS

RGOS10.1

### 23.1.3 ip host

IP no

**ip host** *host-name ip-address*

**no ip host** *host-name ip-address*

<i>host-name</i>	



---

<b>show hosts</b>	

RGOS10.1

### 23.1.5 show hosts

DNS

**show hosts**

DNS

```
Ruijie# show hosts
Name servers are:
static
host          type          address
switch        static         192.168.5.243
www.ruijie.com dynamic        192.168.5.123
```

<b>ip host</b>	IP
<b>ip name-server</b>	DNS

RGOS10.1

## 24 SNTP

### 24.1

- **sntp enable**
- **sntp server**
- **sntp interval**

#### 24.1.1 sntp enable

SNTP **no**  
 —Disable

**[no] sntp enable**

SNTP Disable

**show sntp** SNTP

Ruijie(config)# **sntp enable**

<b>show sntp</b>	SNTP
<b>clock update-calendar</b>	
<b>clock set</b>	

RGOS10.0

## 24.1.2 sntp server

SNTP Server                  SNTP                  NTP  
 Server                          internet                  NTP Server

**sntp server A.B.C.D**  
**no sntp server**

A.B.C.D    NTP/SNTP                  IP

NTP/SNTP

**show sntp**                  SNTP

Ruijie(config)# **sntp server 192.168.4.12**

<b>show sntp</b>	SNTP
<b>sntp enable</b>	SNTP

RGOS10.0

## 24.1.3 sntp interval

SNTP Client                  NTP/SNTP Server

**sntp interval seconds**  
**no sntp interval**

*seconds*    60    --65535

1800s

**show sntp**          SNTP

Ruijie(config)# **sntp interval 3600**

<b>sntp enable</b>	SNTP
<b>show sntp</b>	SNTP
<b>clock update-calendar</b>	

RGOS10.0

r

sntp enable

## 24.2

:

- **show sntp**


### 24.2.1 show sntp

SNTP

**show sntp**          SNTP

```
Ruijie# show sntp
SNTP state           : Enable
SNTP server          : 192.168.4.12
SNTP sync interval  : 60
Time zone            : +8
```

---



# 25 NTP

## 25.1 NTP

NTP

- **no ntp**
- **ntp access-group**
- **ntp authenticate**
- **ntp authentication-key**
- **ntp disable**
- **ntp master**
- **ntp server**
- **ntp trusted-key**
- **ntp update-calendar**

### 25.1.1 no ntp

ntp  
**no ntp**

ntp

NTP

NTP  
NTP

NTP

NTP

NTP

**no ntp**

<b>ntp server</b>	NTP

### 25.1.2 ntp access-group

NTP

no

**ntp access-group** {peer|serve|serve-only|query-only}  
*access-list-number* | *access-list-name*

**no ntp access-group** {peer|serve|serve-only|query-only}  
*access-list-number* | *access-list-name*

<b>peer</b>	NTP
<b>serve</b>	NTP
<b>serve-only</b>	NTP
<b>query-only</b>	NTP
<i>access-list-number</i>	IP 1 99 1300 1999
<i>access-list-name</i>	IP

NTP

NTP

NTP

NTP

peer

serve serve-only query-only

---

r

---

1

2

Ruijie(config)# ntp access-group peer 1

Ruijie(config)# ntp access-group serve-only 2

ip access-list	IP

### 25.1.3 ntp authenticate

NTP

NTP

**ntp authenticate**

**no ntp authenticate**

NTP



md5 key-id  
**ntp trusted-key** key-id

1024

ID 6

ntp authentication-key 6 md5 woooooop

<b>ntp authenticate</b>	
<b>ntp trusted-key</b>	
<b>ntp server</b>	NTP

### 25.1.5 ntp disable

NTP

**ntp disable**

NTP

NTP

NTP

---

r

IP

---

NTP

no ntp

### 25.1.6 ntp master

NTP

no

NTP

**ntp master** [*stratum*]

**no ntp master**

<i>stratum</i>	15	8 <sup>1</sup>

NTP

---

r

---

```
Ruijie(config)# ntp master 12
```

## 25.1.7 ntp server

```
                NTP          NTP
ntp server
```

NTP  
IP                      NTP

NTP server

IPv4            Ruijie(config)# ntp server 192.168.210.222

no ntp	NTP

### 25.1.8 ntp trusted-key

ID

**ntp trusted-key** *key-id*

**no ntp trusted-key** *key-id*

<i>key-id</i>	ID

NTP

ID

```
ntp authentication-key 6 md5 woooooop
ntp trusted-key 6
ntp server 192.168.210.222 key 6
```

--	--

<b>ntp authenticate</b>	
<b>ntp authentication-key</b>	NTP
<b>ntp server</b>	NTP

### **25.1.9 ntp update-calendar**

NTP



NTP

---

NTP

NTP

NTP

show ntp status

## 26 UDP-Helper

### 26.1

#### 26.1.1 udp-helper enable

```

udp-helper enable          UDP          no
udp-helper enable          UDP
                           UDP
udp-helper enable
no udp-helper enable

```

UDP

```

UDP-Helper                69,53,37,137,138,49
UDP

```

UDP :

```
Ruijie(config)# udp-helper enable
```

ip forward-protocol	UDP

RGOS10.1

#### 26.1.2 ip helper-address

UDP

no

UDP

**ip helper-address** *address*  
**no ip helper-address** *address*

<i>address</i>	IDD &\$

UDP

20

UDP-Helper

UDP

**no ip helper-address**

UDP

Ruijie(config-if)# **ip helper-address** 192.168.100.1

<b>ip forward-protocol</b>	UDP

RGOS10.1

### 26.1.3 ip forward-protocol

UDP

no

UDP

```
ip forward-protocol udp [port | tftp | domain | time | netbios-ns |  
netbios-dgm | tacacs]
```

```
no ip forward-protocol udp [port | tftp | domain | time | netbios-ns |  
netbios-dgm | tacacs]
```

<b>udp-helper enable</b>	UDP
<b>ip forward-protocol</b>	UDP

RGOS10.1

## 27 SNMP

### 27.1

SNMP

- **no snmp-server**
- **snmp-server chassis-id**
- **snmp-server community**
- **snmp-server contact**
- **snmp-server enable traps**
- **snmp-server host**
- **snmp-server location**
- **snmp-server packetsize**
- **snmp-server queue-length**
- **snmp-server system-shutdown**
- **snmp-server trap-source**
- **snmp-server trap-timeout**
- **snmp-server user**
- **snmp-server group**
- **snmp-server view**
- **snmp-server if-index persist**

#### 27.1.1 no snmp-server

SNMP

**no snmp-server**

**no snmp-server**

SNMP

SNMP

SNMP

Ruijie(config)# **no snmp-server**

## 27.1.2 snmp-server chassis-id

```

SNMP
chassis-id no
snmp-server chassis-id text
no snmp-server chassis-id

```

*text*

60FF60

SNMP

**show snmp**

SNMP 123456:

Ruijie(config)# **snmp-server chassis-id 123456**

show snmp	SNMP

## 27.1.3 snmp-server community

```

SNMP
community no SNMP
snmp-server community string [view view-name] [[ro | rw] [host
ipaddr] [ number ]
no snmp-server community string

```

*string* NMS SNMP

*view-name*



SNMP

i-net800@i-net.com.cn

```
Ruijie(config)# snmp-server contact i-net800@i-net.com.cn
```

show snmp-server	SNMP
no snmp-server	SNMP

### 27.1.5 snmp-server enable traps

SNMP NMS Trap

**snmp-server enable traps**


no SNMP NMS Trap

**snmp-server enable traps [snmp ]****no snmp-server enable traps****snmp SNMP****snmp-server**

SNMP

```
Ruijie(config)# snmp-server enable traps snmp
```

```
Ruijie(config)# snmp-server host 192.168.12.219 public snmp
```



SNMP

SNMP

```
Ruijie(config)# snmp-server host 192.168.12.219 public
snmp
```

snmp-server enable traps	

### 27.1.7 snmp-server location

SNMP

snmp-server

```
location no SNMP
```

```
snmp-server location text
```

```
no snmp-server location
```

```
text
```

```
Ruijie(config)# snmp-server location start-technology
-city 4F of A Buliding
```

snmp-sever contact	SNMP

### 27.1.8 snmp-server packetsize

SNMP

snmp-sever

```
packetsize no
```

```
snmp-server packetsize byte-count
```

```
no snmp-server packetsize
```

*byte-count*

484

17876

1500

<b>snmp-server packetsize</b>	SNMP

### 27.1.10 snmp-server system-shutdown

```
SNMP
system-shutdown no snmp-server
snmp-server system-shutdown
no snmp-server system-shutdown
```

SNMP

SNMP

RGOS

SNMP

IP

IP

SNMP

0 IP      SNMP

Ruijie(config)# **snmp-server trap-source fastethernet 0**

<b>snmp-server enable traps</b>	
<b>snmp-server enable host</b>	NMS

### 27.1.12 snmp-server trap-timeout

**snmp-server**

**trap-timeout**      no

**snmp-server trap-timeout** *seconds*

**no snmp-server trap-timeout**

*seconds*

30

60

Ruijie(config)# **snmp-server trap-timeout 60**

<b>snmp-server queue-length</b>	
<b>snmp-server enable host</b>	NMS

### 27.1.13 snmp-server user

```

SNMP
snmp-server user
no
snmp-server user username groupname {v1 | v2 | v3 [encrypted]
[auth {md5 | sha} auth-password ] [priv des56 priv-password]}
[access {num | name}]
no snmp-server user username groupname {v1 | v2c | v3 }

username
groupname
v1 | v2 | v3      SNMP      v3
encrypted
                MD5      16      SHA
                20
auth            md5      MD5      sha
                SHA
auth-password:                32

priv            des56      56      DES
priv-password                32

```

```

snmpV3      md5      DES
Ruijie(config)# snmp-server user user-2 mib2user v3 auth
md5 authpassstr priv des56 despassstr

```


show snmp user	SNMP

## 27.1.14 snmp-server group

---

SNMP	snmp-server group
no	
<b>snmp-server group</b> <i>groupname</i> { <b>v1</b>   <b>v2c</b>   <b>v3</b> { <b>auth</b>   <b>noauth</b>   <b>priv</b> }}	
[ <b>read</b> <i>readview</i> ][ <b>write</b> <i>writeview</i> ] [ <b>access</b> { <i>num</i>   <i>name</i> }]	
<b>no snmp-server group</b> <i>groupname</i> { <b>v1</b>   <b>v2c</b>   <b>v3</b> }	
<b>v1</b>   <b>v2c</b>   <b>v3</b>	SNMP
<b>auth</b>	v3
<b>noauth</b>	v3
<b>priv</b>	v3
<i>readview</i>	
<i>writeview</i>	

```
Ruijie(config)# snmp-server group mib2user v3 priv read  
mib2
```





<b>show run</b>	

## 27.2

### 27.2.1 show snmp

SNMP

**show snmp**

**show snmp [mib | user | view | group]**

## SNMP

---

0 Trap PDUs  
SNMP global trap: disabled  
SNMP logging: disabled  
SNMP agent: enabled

<b>snmp-server</b> <i>chassis-id</i>	SNMP

## 28 RMON

### 28.1

RMON

- **rmon collection stats** *index* [**owner** *owner-string*]
- **rmon collection history** *index* [**owner** *owner-string*] [**buckets** *bucket-number*] [**interval** *seconds*]
- **rmon alarm** *number variable interval* {**absolute** | **delta** } **rising-threshold** *value* [*event-number*] **falling-threshold** *value* [*event-number*] [**owner** *ownername*]
- **rmon event** *number* [**log**] [**trap** *community*] [*description-string*]
- **show rmon statistics**
- **show rmon history**
- **show rmon events**
- **show rmon alarms**

#### 28.1.1 rmon collection stats

no

**rmon collection stats** *index* [**owner** *owner-string*]

**no rmon collection stats** *index*

1

```
Ruijie(config)# interface fast-Ethernet 0/1  
Ruijie(config-if)# rmon collection stats 1 zhansan
```

<b>rmon collection history</b> <i>index</i> [ <b>owner</b> <i>owner-name</i> ] <b>buckets</b> <i>bucket-number</i> <b>interval</b> <i>seconds</i>	

## 28.1.2 rmon collection history

**no**

**rmon collection history** *index* [**owner** *ownername*] [**buckets** *bucket-number*] [**interval** *seconds*]

**no rmon collection history** *index*

RGOS

owner buckets interval

1

```
Ruijie(config)# interface fast-Ethernet 0/1
Ruijie(config-if)# rmon collection history 1 zhansan
buckets 10 interval 10
```

--	--

**rmon alarm** *number variable interval {absolute | delta }  
 rising-threshold value [event-number] falling-threshold value  
 [event-number] [owner ownername]  
 no rmon alarm number*

RGOS

variable interval absolute/delta owner interval  
 rising-threadhold/falling-threadhold event

MIB ifInNUcastPkts.6

```
Ruijie(config)# rmon alarm 10 1.3.6.1.2.1.2.2.1.12.6 30
delta rising-threshold 20 1 falling-threshold 10 1 owner
zhangsan
```

<b>rmon event</b> <i>number [log] [trap community] [description-string]</i>	

### 28.1.4 rmon event

**no**

**rmon event** *number [log] [trap community] [description-string]  
 no rmon alarm number*

trap

```
Ruijie(config)# rmon event 1 log trap rmon description
"ifInNUcastPkts is too much " owner zhangsan
```

<b>rmon alarm</b> <i>number variable interval</i> { <b>absolute</b>   <b>delta</b> } <b>rising-threshold</b> <i>value</i> [ <i>event-number</i> ] <b>falling-threshold</b> <i>value</i> [ <i>event-number</i> ] [ <b>owner</b> <i>ownername</i> ]	

## 28.2

### 28.2.1 show rmon statistics

**show rmon statistics**

```
Ruijie# show rmon statistics
Statistics : 1
Data source : Gi1/1
DropEvents : 0
Octets : 1884085
Pkts : 3096
BroadcastPkts : 161
MulticastPkts : 97
CRCAlignErrors : 0
UndersizePkts : 0
OversizePkts : 1200
```

```

Fragments : 0
Jabbers : 0
Collisions : 0
Pkts64Octets : 128
Pkts65to127Octets : 336
Pkts128to255Octets : 229
Pkts256to511Octets : 3
Pkts512to1023Octets : 0
Pkts1024to1518Octets : 1200
Owner : zhangsan
    
```

<b>rmon collection stats</b> <i>index</i> [owner owner-string]	


## 28.2.2 show rmon history

**show rmon history**

```

Ruijie# show rmon history
Entry : 1
Data source : Gil/1
Buckets requested : 65535
Buckets granted : 10
Interval : 1
Owner : zhangsan
Sample : 198
Interval start : 0d:0h:15m:0s
DropEvents : 0
Octets : 67988
    
```

Pkts : 726  
BroadcastPkts : 502  
MulticastPkts : 189  
CRCAlignErrors : 0  
UndersizePkts : 0  
OversizePkts : 0  
Fragments : 0  
Jabbers : 0  
Collisions : 0  
Utilization : 0



Log : 2  
Log time : 0d:0h:38m:56s  
Log description : ipttl



<b>rmon event</b> <i>number</i> [ <b>log</b> ] [ <b>trap</b> <i>community</i> ] [ <i>description-string</i> ]	
--	--

## 29 VRF

### 29.1 VRF

VRF

- **show ip route vrf**
- **clear ip route vrf**
- **ip vrf**
- **ip vrf forwarding**
- **show ip vrf**

#### 29.1.1 show ip route vrf

VRF

**show ip route vrf** *vrf-name* [*network* [*mask*]]

<i>vrf-name</i>	VRF
<i>network</i>	
<i>mask</i>	

VRF

VRF

Ruijie# **show ip route vrf redvrf**

<b>clear ip route vrf</b>	VRF

RGOS10.1

#### 29.1.2 clear ip route vrf

## VRF

**clear ip route vrf** *vrf-name* { \* | *network* [*mask*]

<i>vrf-name</i>	VRF
*	VRF
<i>network</i>	
<i>mask</i>	

```
Ruijie# clear ip route vrf redvrf *
```

**show ip route vrf**

RGOS10.1

### 29.1.3 ip vrf

VRF                      VRF                      no

**ip vrf** *vrf-name*

**no ip vrf** *vrf-name*

*vrf-name*                      VRF

VRF

```
Ruijie(config)# ip vrf redvrf
```

RGOS10.1

### 29.1.4 rd

**rd rd\_value**

vrf rd VRF VRF VRF  
rd VRF

rd\_value

1) rd\_value as\_num nn

an\_num nn

2) rd\_value ip\_addr:nn

ip\_addr IP nn

rd vrf rd

vrf

vrf RD RD RD  
RD vrf RD

vrf RD RD

Ruijie(config)# **ip vrf vrf1**

Ruijie (config-vrf)# **rd 100:1**

```

import    vrf    import
export    vrf    export
both      vrf          import    export

rt_value

● rt_value    as_num    nn
as_num                ,nn
● rt_value    ip_addr:nn
ip_addr                IP    ,nn
    
```

### Route-Target

```

vrf

vrf          route-target.import    vrf          export
vrf
    
```

```

Ruijie(config)# ip vrf vrf1
Ruijie(config-vrf)# route-target import 100:1
Ruijie(config-vrf)# route-target export 100:2
Ruijie(config-vrf)# route-target both 100:4
    
```

ip vrf	vrf

RGOS10.3(3)

## 29.1.6 ip vrf forwarding

```

VRF;          VRF          no

ip vrf forwarding vrf-name
no ip vrf forwarding vrf-name
    
```

---

*vrf-name* VRF

VRF

VRF

Ruijie(config-if)# **ip vrf forwarding redvrf**

RGOS10.1

### 29.1.7 show ip vrf

VRF

**show ip vrf [ brief | detail | interfaces ] [ *vrf-name* ]**

**brief** VRF

**detail** VRF

**interfaces** VRF

*vrf-name* ( ) VRF

VRF

VRF

- brief

- detail

VRF

interfaces

Ruijie# **show ip vrf redvrf**

RGOS10.1

# 30 RIP

## 30.1

### 30.1.1 address-family RIP

RIP

**address-family****no****address-family ipv4 vrf** *vrf-name***no address-family ipv4 vrf** *vrf-name*

<b>vrf</b> <i>vrf-name</i>	VRF

RIP

**address-family**

(config-router-af)#

VRF RIP

VRF

RIP

VRF RIP

**exit-address-family** **exit**

vpn1 VRF

vrf

RIP

Ruijie(config)# **ip vrf vpn1**Ruijie(config-vrf)# **exit**Ruijie(config)# **interface FastEthernet 1/0**Ruijie(config-if)# **ip vrf forwarding vpn1**Ruijie(config-if)# **ip address 192.168.1.1**  
255.255.255.0

```

Ruijie(config)# router rip
Ruijie(config-router)# address-family ipv4 vrf vpn1
Ruijie(config-router-af)# network 192.168.1.0
Ruijie(config-router)# exit-address-family

```

<b>exit-address-family</b>	
<b>ip vrf</b>	VRF

### 30.1.2 auto-summary (RIP)

```

RIP
no
auto-summary
no auto-summary
auto-summary

```

```

RIP
RIPv1 RIPv2
RIP

```

- RIP
  - RIP
  -
- RIPv1
- RIPv2

RIPv2

```
Ruijie(config)# router rip  
Ruijie(config-router)# version 2  
Ruijie(config-router)# no auto-summary
```

```
Ruijie(config-router)# default-metric 3
Ruijie(config-router)# redistribute ospf 100
```

<b>redistribute</b>	

### 30.1.4 default-information originate(RIP)

RIP

```
default-information originate no
```

```
default-information originate [always] [metric metric-value]
[route-map map-name]
```

```
no default-information originate [always] [metric] [route-map
map-name]
```

<b>always</b>	RIP
<b>metric</b> <i>metric-value</i>	<i>metric-value</i> 1-15
<b>route-map</b> <i>map-name</i>	route-map , route-map

```
metric 1
```

RIP

```
default-information originate
```

```
always RIP
```

```
show ip rip database RIP
```

```

RIP
set metric
metric
route-map set metric metric
RIP
    
```

```

r
RIP
ip default-network
default-information originate RIP
    
```

RIP

```

Ruijie(config-router)# default-information originate
always
    
```

<b>ip rip default-information</b>	
<b>redistribute</b>	RIP

### 30.1.5 distance

```

RIP
no
distance distance [ ip-address wildcard ]
no distance [ distance ip-address wildcard ]
    
```

<i>distance</i>	RIP <1-255>
<i>ip-address</i>	IP
<i>wildcard</i>	IP

120

RIP

RIP

RIP

RIP                    160,                    192.168.12.1  
123

```
Ruijie(config)# router rip
Ruijie(config-router)# distance 160
Ruijie(config-router)# distance 123 192.168.12.1
0.0.0.0
```

### 30.1.6 distribute-list in RIP

**distribute-list in**                    **no**

**distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*  
[**gateway** *prefix-list-name*]} in [*interface-type interface-number*]

**no distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*  
[**gateway** *prefix-list-name*]} in [*interface-type interface-number*]

<i>access-list-number</i>	
<b>prefix</b> <i>prefix-list-name</i>	
<b>gateway</b> <i>prefix-list-name</i>	
<i>interface-type interface-number</i>	(    )

RIP Fastethernet 0/0  
172.16

```
Ruijie(config)# router rip
Ruijie(config-router)# network 200.168.23.0
Ruijie(config-router)# distribute-list 10 in
fastethernet 0/0
Ruijie(config-router)# no auto-summary
Ruijie(config)#access-list 10 permit 172.16.0.0
0.0.255.255
```

access-list	
prefix-list	

### 30.1.7 distribute-list out RIP

**distribute-list out no**

**distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*}  
**out** [*interface* | *protocol* [*process-id* | *process-name*]]

**no distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*}  
**out** [*interface* | *protocol* [*process-id* | *process-name*]]

<i>access-list-number</i>	
<b>prefix</b> <i>prefix-list-name</i>	
<i>interface</i>	( )

<i>protocol</i>	( )
<i>process-id</i>	( ) <i>protocol</i> OSPF OSPF id
<i>process-name</i>	( ) <i>protocol</i> ISIS ISIS

RIP

192.168.12.0/24

```

Ruijie(config)# router rip
Ruijie(config-router)# network 200.4.4.0
Ruijie(config-router)# network 192.168.12.0
Ruijie(config-router)# distribute-list 10 out
Ruijie(config-router)# version 2
Ruijie(config)# access-list 10 permit 192.168.12.0
0.0.0.255

```

<b>access-list</b>	
<b>prefix-list</b>	
<b>redistribute</b>	

### 30.1.8 exit-address-family

**exit-address-family**

**exit-address-family**

**no**

**exit**

Ruijie(config-router)# **address-family ipv4 vrf vpn1**

RIPv1                  RIP                                  RIPv2

                                 Serial 0                  RIP                                  ripchain

```
Ruijie(config)# interface serial 0/0
Ruijie(config-if)# ip rip authentication key-chain
ripchain
```

<b>ip rip authentication mode</b>	RIP
<b>ip rip authentication text-password</b>	RIP
<b>key chain</b>	

### 30.1.10 ip rip authentication mode

RIP                                  ip rip authentication

mode                  no                  RIP

**ip rip authentication mode {text | md5}**

**no ip rip authentication mode**

<b>text</b>	RIP
<b>md5</b>	RIP                  MD5

RIP                  RIP                                  RIP

RIPv1                  RIP                                  RIPv2

Serial 0      RIP      MD5

```
Ruijie(config)# interface serial 0/0
Ruijie(config-if)# ip rip authentication mode md5
```

<b>ip rip authentication key-chain</b>	RIP RIPv2	RIP RIP
<b>ip rip authentication text-password</b>	RIP	

### 30.1.11 ip rip authentication text-password

RIP      ip rip authentication  
text-password      no

**ip rip authentication text-password** *password-string*  
**no ip rip authentication text-password**

<i>password-string</i>	1 16

RIP

RIPv1      RIP      RIPv2

Serial 0      RIP

ruijie

```
Ruijie(config)# interface serial 0/0
Ruijie(config-if)# ip rip authentication text-password
ruijie
```

<b>ip rip authentication mode</b>	RIP				
<b>ip rip authentication key-chain</b>	<table> <tr> <td>RIP</td> <td>RIP</td> </tr> <tr> <td>RIPv2</td> <td>RIP</td> </tr> </table>	RIP	RIP	RIPv2	RIP
RIP	RIP				
RIPv2	RIP				

**30.1.12 ip rip default-information**

**default-information**          RIP          **ip rip**  
    **no**

**ip rip default-information only originate** [*metric metric-value*]  
**no ip rip default-information**

<b>only</b>	
<b>originate</b>	
<b>metric</b> <i>metric-value</i>	1-15 <b>m e t r i c</b>

ethernet0/0

```
Ruijie(config)# interface ethernet 0/0
Ruijie(config-if)# ip rip default-information only
```

default-information originate	RIP

### 30.1.13 ip rip receive enable

```
RIP
receive enable      no      RIP      ip rip
                   RIP      RIP      RIP
```

```
ip rip receive enable
no ip rip receive enable
```

RIP

```
no
default            RIP
                  RIP
```

Fastethernet 0/0 RIP

```
Ruijie(config)# interface fastethernet 0/0
Ruijie(config-if)# no ip rip receive enable
```

ip rip send enable	RIP
passive-interface	RIP

### 30.1.14 ip rip receive version

```

RIP
ip rip receive version
no
RIP
ip rip receive version [1] [2]
no ip rip receive version

```

1	RIPv1
2	RIPv2

**version**

```

RIP
vesion
RIPv1 RIPv2
version

```

```

Fastethernet 0/0
RIPv1 RIPv2

```

```

Ruijie(config)# interface fastethernet 0/0
Ruijie(config-if)# ip rip receive version 1 2

```

version	RIP

### 30.1.15 ip rip send enable

```

RIP
send enable
no
RIP
RIP
ip rip
RIP

```

```

ip rip send enable

```

---

**no ip rip send enable**

RIP

RIP  
 no  
 default RIP  
 Fastethernet 0/0 RIP  
 Ruijie(config)# **interface fastethernet 0/0**  
 Ruijie(config-if)# **no ip rip send enable**

<b>ip rip receive enable</b>	RIP
<b>passive-interface</b>	RIP

### 30.1.16 ip rip send version

RIP RIP  
**ip rip receive version no**  
**ip rip send version [1] [2]**  
**no ip rip send version**

<b>1</b>	RIPv1
<b>2</b>	RIPv2

**version**

```

RIP
    version
        RIPv1  RIPv2
        version
Fastethernet 0/0
        RIPv1  RIPv2

```

```

Ruijie(config)# interface fastethernet 0/0
Ruijie(config-if)# ip rip send version 1 2

```

version	RIP

### 30.1.17 ip rip v2-broadcast

```

RIP version 2
    ip rip v2-broadcast
        no

```

```

ip rip v2-broadcast
no ip rip v2-broadcast

```

```

version

```

```

RIP
    version

```

```
Ruijie(config)# interface fastethernet 0/0  
Ruijie(config-if)# ip rip v2-broadcast
```

version	RIP

### 30.1.18 ip split-horizon (RIP)

RIP

ip split-horizon p ) " €



<b>auto-summary</b>	RIP

### 30.1.20 network (RIP)

```

RIP
network          no
network network-number [wildcard]
no network network-number [wildcard]

```

<i>network-number</i>	IP RIP
<i>wildcard</i>	IP                    0                    1

```

network-number wildcard
RIP
wildcard            RGOS                    RIP
RIP                                            RIP
RIP
RIP
RIP
192.168.12.0/24    172.16.0.0/24                    RIP
Ruijie(config)# router rip
Ruijie(config-router)# network 192.168.12.0
Ruijie(config-router)# network 172.16.0.0 0.0.0.255

```

### 30.1.21 neighbor (RIP)

RIP IP  
no

neighbor

neighbor ip-address

no neighbor



ip-address

IP

S • î,ý-ÓKÂ5% p! <F¼-Ñ€'!,&, Ä< y Ê ,ýôr μ

<i>interface-number</i>	
-------------------------	--

offset

```

RIP
offset-list
acl 7
RIP
metric 7
Ruijie(config-router)# offset-list 7 out 7
fastEthernet1/0
acl 8
RIP
metric 7
Ruijie(config-router)# offset-list 7 in 7
Ruijie(config-router)# offset-list 8 in 7 fastEthernet
1/0

```

### 30.1.23 output-delay

```

RIP
output-delay no
output-delay delay
no output-delay

```

--	--

*delay*

RIP 512 25  
25

**output-delay**

RIP 30

```
Ruijie(config)# router rip
Ruijie(config-router)# output-delay 30
```

### 30.1.24 passive-interface

**passive-interface** **no**

**passive-interface** {**default** | *interface-type interface-num*}  
**no passive-interface** {**default** | *interface-type interface-num*}

<b>default</b>	passive
<i>interface-type interface-num</i>	

passive

```

passive-interface default passive
no passive-interface intface-type interface-num
passive
ip rip send enable ip rip receive enable
RIP
passive RIP RIP
enable ip rip send enable ip rip receive

```

```

passive
passive ethernet0/0
Ruijie(config-router)# passive-interface default
Ruijie(config-router)# no passive-interface ethernet
0/0

```

<b>ip rip receive enable</b>	RIP
<b>ip rip send enable</b>	RIP

### 30.1.25 redistribute RIP

```

redistribute
no
redistribute {bgp | isis [process-name] | ospf <1-65535> | connec
ted | static}[metric value ] [route-map route-map-name ][ match i
nternal | external type | nssa-external type ]
no redistribute {bgp | isis [process-name] | ospf <1-65535> |
connected | static}[metric value ] [route-map route-map-name ]
[ match internal | external type | nssa-external type ]

```

<b>bgp   isis   ospf   connected   static</b>	
<b>metric</b>	metric
<b>route-map</b>	
<b>match</b>	ospf
<i>process-name</i>	ISIS
<1-65535>	OSPF

```
OSPF
ISIS          level-2
              metric 1
route-map
```

RIP

RIP

OSPF

```
isis          level level-2
              level  level
              level 1, level 2
level-1-2
ospf          match
ospf          match
match        match
            no
```

RIP

```
Ruijie(config-router)# redistribute static
```



RIP

RIP

**async default routing**

RIP

Ruijie(config)# **router rip**

<b>network (RIP)</b>	RIP

### 30.1.27 timers basic

RIP

**timers basic**

no

**timers basic** *update invalid flush***no timers basic**

<i>update</i>	<i>update</i> 30 <i>invalid Flush</i>
<i>invalid</i>	<i>invalid</i> <i>invalid invalid</i> <i>Invalid 180</i>

<i>flush</i>	<i>flush</i> <i>Flush</i>	RIP <i>invalid</i> 120	<i>invalid</i>
--------------	------------------------------	------------------------------	----------------

30 180 120

RIP RIP

RIP **show ip rip**

RIP 10 30  
invalid 90

```
Ruijie(config)# router rip
Ruijie(config-router)# timers basic 10 30 90
```

---

r

2Mbps

---

### 30.1.28 validate-update-source

RIP  
**validate-update-source no**

**validate-update-source**  
**no validate-update-source**

RIP

---

RIP  
RIP

IP

IPcc81b[3d403fe>



---

```
                RIP
                rip      rip      metric  distance
                VRF      VRF      VRF-id
```

## RIP

```
Ruijie# show ip rip
Routing Protocol is "rip"
Sending updates every 10 seconds, next due in 4 seconds
Invalid after 20 seconds, flushed after 10 seconds
Outgoing update filter list for all interface is: not
set
Incoming update filter list for all interface is: not
set
Default redistribution metric is 2
Redistributing: connected
Default version control: send version 2, receive version
2
Interface          Send  Recv
FastEthernet 1/1    2     2
FastEthernet 1/0    2     2
Routing for Networks:
192.168.26.0 255.255.255.0
192.168.64.0 255.255.255.0
Distance: (default is 50)
```

## vrf RIP

```
Ruijie(config-router)# sh ip rip vrf 1
VRF 1 VRF-id:1
Routing Protocol is "rip"
Sending updates every 30 seconds, next due in 4 seconds
Invalid after 180 seconds, flushed after 120 seconds
Outgoing update filter list for all interface is: not
set
Incoming update filter list for all interface is: not
set
Default redistribution metric is 1
Redistributing:
Default version control: send version 1, receive any
version
Routing for Networks:
Distance: (default is 120)
```

## 30.2.2 show ip rip database

RIP

**show ip rip database**
**show ip rip database** [**vrf** *vrf-name*] [*network-number* {*network-mask*}]

<b>vrf</b> <i>vrf-name</i>	VRF RIP
<i>network-number</i>	
<i>network-mask</i>	

RIP

RIP

```
Ruijie# show ip rip database
192.168.1.0/24 auto-summary
192.168.1.0/30 directly connected, Loopback 3
192.168.1.8/30 directly connected, FastEthernet 0/0
192.168.121.0/24 auto-summary
192.168.121.0/24 redistributed
[1] via 192.168.2.22, FastEthernet 0/1
```

RIP

192.168.121.0/24

```
Ruijie# show ip rip database 192.168.121.0 255.255.255.0
192.168.121.0/24 redistributed
[1] via 192.168.2.22, FastEthernet 0/1
```

--	--

---

show ip rip	
-------------	--

### 30.2.3 show ip rip external

RIP

show ip rip external

```
show ip rip external [bgp | connected | isis [process-name] | ospf  
<1-65535> | static] [vrf vrf-name]
```

bgp   connected   isis   ospf   static	

vrf vrf-name

VRF RIP

<b>show ip rip</b>	

### 30.2.4 show ip rip interface

RIP

**show ip rip interface****show ip rip interface [vrf *vrf-name*]**

<b>vrf <i>vrf-name</i></b>	VRF RIP

RIP

```

Ruijie# show ip rip interface
FastEthernet 1/1 is down, line protocol is down
  RIP is not enabled on this interface
FastEthernet 1/0 is up, line protocol is up
  Routing Protocol: RIP
  Receive RIPv2 packets only
  Send RIPv2 packets only
  Passive interface: Disabled
  Split horizon: Enabled
  V2 Broadcast: Disabled
  Multicast register: Registered
  Interface Summary Rip:
    Not Configured
  Authentication mode: Text
  Authentication key-chain: ripk1
  Authentication text-password: ruijie
  Default-information: only, metric 5
  IP interface address:
    192.168.64.100/24

```

```

RIP BFD ,
:
Ruijie#show ip rip interface
VLAN 1 is up, line protocol is up
Routing Protocol: RIP
  Receive RIPv1 and RIPv2 packets
  Send RIPv1 packets only
  Receive RIP packet: Enabled
  Send RIP packet: Enabled
  Send RIP supernet routes: Enabled
  Passive interface: Disabled
  Split horizon: Enabled
  BFD: Enabled
  V2 Broadcast: Disabled
  Multicast registe: Registered
  Interface Summary Rip:
    Not Configured
  IP interface address:
2.2.2.111/24

```

<b>show ip rip</b>	

### 30.2.5 show ip rip peer

```

RIP      RIP      (RIP      )
      RIP      show ip rip peer
show ip rip peer [ip-address] [vrf vrf-name]

```

<i>ip-address</i>	RIP
<b>vrf vrf-name</b>	VRF RIP

## RIP

Ruijie# **show ip rip peer**

Peer 192.168.3.2:

Local address: 192.168.3.1

Input interface: GigabitEthernet 0/2

Peer version: RIPv1

Received bad packets: 3

Received bad routes: 0

BFD session state up

<b>show ip rip</b>	

# 31 OSPF

## 31.1

### 31.1.1 area

**no** OSPF

**area** area-id

**no area** area-id

area-id	OSPF IP

OSPF

**no** OSPF

**area authentication area default-cost area filter-list**

**area nssa**

OSPF

1.

2.

**network area**

OSPF 2

Ruijie(config)# **router ospf 2**

Ruijie(config)# **no area 2**

<b>network area</b>	OSPF OSPF

### 31.1.2 area authentication

OSPF

**area authentication**

**no**

OSPF

**area *area-id* authentication [message-digest]**

**no area**

OSPF                      0                      MD5  
backbone

```
Ruijie(config)# interface FastEthernet 0/0
Ruijie(config-if)# ip address 192.168.12.1
255.255.255.0
Ruijie(config-if)# ip ospf message-digest-key 1 md5
backbone

#      OSPF

Ruijie(config)# router ospf 1
Ruijie(config-router)# network 192.168.12.0
0.0.0.255 area 0
Ruijie(config-router)# area 0 authentication
message-digest
```

<b>ip ospf authentication-key</b>	OSPF
<b>ip ospf message-digest-key</b>	OSPF MD5
<b>area virtual-link</b>	

### 31.1.3 area default-cost

STUB                      NSSA                      OSPF  
**area default-cost**                      **no**

```
area area-id default-cost cost
no area area-id default-cost
```

<i>area-id</i>	STUB      NSSA
<i>cost</i>	STUB      NSSA

```

                                ABR
                                STUB
                                NSSA
                                ABR
                                ABR

    OSPF          STUB      NSSA          area
stub area nssa area default-cost          STUB
                                area stub          NSSA          area
nssa          area default-cost          ABR
    
```

50

```

Ruijie(config)# router ospf 1
Ruijie(config-router)# network 172.16.0.0 0.0.255.255
area 0
Ruijie(config-router)# network 192.168.12.0 0.0.0.255
area 1
Ruijie(config-router)# area 1 stub
Ruijie(config-router)# area 1 default-cost 50
    
```

<b>area stub</b>	OSPF
<b>area nssa</b>	OSPF      NSSA

### 31.1.4 area filter-list

```

ABR          intra-area

area area-id filter-list [access acl-name | prefix prefix-name] [in | out]
no area area-id filter-list [access acl-name | prefix prefix-name] [in |
out]
    
```



<b>area-id</b>	NSSA
<b>no-redistribution</b>	ABR nssa nssa
<b>default-information-originate</b>	nssa ABR ASBR 7 LSA NSSA
<b>no-summary</b>	(ABR) nssa nssa LSA

NSSA

```

default-information-originate           Type-7 LSA
nssa  ABR  ASBR                          ABR
                                           ASBR (
ABR)                                       Type-7 LSA

no-redistribution  ASBR  OSPF  redistribute
                    NSSA                    NSSA
                    ASBR  ABR                    nssa

                    NSSA                      LSA
ABR  no-s mmary  ABR  NSSA
summary LSAs  Type-3 LSA

area default-cost           NSSA           ABR
                               NSSA
                               NSSA           1

1

Ruijie(config)# router ospf 1

```

```
Ruijie(config-router)# network 172.16.0.0 0.0.255.255
area 0
Ruijie(config-router)# network 192.168.12.0 0.0.0.255
area 1
Ruijie(config-router)# area 1 nssa
```

area default-cost	OSPF NSSA

### 31.1.6 area range

```
OSPF
range no no area cost
area area-id range ip-address net-mask [advertise | not-advertise]
[cost cost]
no area area-id range ip-address net-mask [cost]
```

area-id	OSPF IP
ip-address	
advertise   not-advertise	
cost cost	

```
RFC1583
RFC1583
cost
cost
```

ABR

advertise not-advertise

OSPF

172.16.16.0/20

```
Ruijie(config)# router ospf 1  
Ruijie(config-router)# network
```

```

OSPF
(LSA) 1 1 area stub ABR
LSA 3 3 LSA LSA 2 2
OSPF ABR
OSPF
ABR area stub
no-summary
ABR
OSPF area stub area
default-cost area stub
area default-cost ABR area default-cost

```

1

```

Ruijie(config)# router ospf 1
Ruijie(config-router)# network 172.16.0.0 0.0.255.255
area 0
Ruijie(config-router)# network 192.168.12.0 0.0.0.255
area 1
Ruijie(config-router)# area 1 stub

```

**mit-interval** *seconds*] [**transmit-delay** *seconds*] [[**authentication-key** *key*] | [**message-digest-key** *key-id md5 key*]]  
**no area** *area-id virtual-link router-id*

<i>area-id</i>	OSPF IP
<i>router-id</i>	show ip ospf
<b>dead-interval</b> <i>seconds</i>	40
<b>hello-interval</b> <i>seconds</i>	OSPF Hello 10
<b>retransmit-interval</b> <i>seconds</i>	OSPF LSA 5
<b>transmit-delay</b> <i>seconds</i>	OSPF LSA LSA 1 LSA LSA
<b>authentication-key</b> <i>key</i>	OSPF service password-encryption
<b>message-digest-key</b> <i>key-id md5 key</i>	OSPF MD5 MD5 service password-encryption
<b>authentication</b>	

**retransmit-interval** 5

**transmit-delay** 1

;

<b>area authentication</b>	OSPF
<b>show ip ospf</b>	OSPF

### 31.1.9 auto-cost

**no**

**auto-cost [reference-bandwidth *ref-bw*]**

**no auto-cost [reference-bandwidth]**



*ref-bw*

Mbps

```
Ruijie(config-router)# auto-cost reference-bandwidth
10
```

<b>show ip ospf</b>	ospf

### 31.1.10 clear ip ospf process

OSPF

**clear ip ospf (*process-id*) process**

<i>process-id</i>	OSPF
	OSPF

RFC2328

OSPF

OSPF 1

```
Ruijie# clear ip ospf 1 process
```

### 31.1.11 compatible rfc1583

AS  
 RFC1583 RFC2328

**commpatible rfc1583**  
**no commpatible rfc1583**


RFC1583

rfc 2328

```
Ruijie(config)# router ospf 1
Ruijie(config-router)# no commpatible rfc1583
```

<b>show ip ospf</b>	ospf

<b>always</b>	OSPF
<b>metric</b> <i>metric</i>	1
<b>metric-type</b> <i>type</i>	OSPF 1 2 1 2 2
<b>route-map</b> <i>map-name</i>	route-map , route-map

**redistribute** ASBR OSPF  
**default-information** ASBR  
**default-information originate** ASBR

always OSPF

**show ip ospf database** OSPF  
 0.0.0.0 OSPF

**show ip route**

**default-information originate**  
**default-metric**

OSPF 1 2

1 1 2 **show ip route**  
 1

STUB

OSPF OSPF  
 1 50

Ruijie(config)# **router ospf 1**

```
Ruijie(config-router)# network 172.16.24.0 0.0.0.255
area 0
Ruijie(config-router)# default-information originate
always metric 50 metric-type 1
```

show ip ospf database	OSPF
show ip route	IP

### 31.1.13 default-metric

```
OSPF
default-metric no
default-metric metric
no default-metric
```

<i>metric</i>	OSPF

20

```
default-metric redistribute
default-metric OSPF default-information originate
OSPF
OSPF 50
Ruijie(config)# router rip
```

```
Ruijie(config-router)# network 192.168.12.0
Ruijie(config-router)# version 2
Ruijie(config-router)# exit
Ruijie(config)# router ospf
Ruijie(config-router)# network 172.16.10.0 0.0.0.255
area 0
Ruijie(config-router)# default-metric 50
Ruijie(config-router)# redistribute rip subnets
```

<b>redistribute</b>	
<b>show ip ospf</b>	ospf

### 31.1.14 distance ospf

OSPF

```
distance ospf {intra-area <1-255> | inter-area <1-255> | external
<1-255>}
no distance ospf
```

<b>intra-area &lt;1-255&gt;</b>	110
<b>inter-area &lt;1-255&gt;</b>	110
<b>external &lt;1-255&gt;</b>	110

110

OSPF

OSPF

```
Ruijie(config)# router ospf 1
Ruijie(config-router)# distance ospf external 160
```

### 31.1.15 distribute-list in

LSA

```
distribute-list {listname | gateway plist-name | prefix plist-name }
in [interface-type num]
no distribute-list {listname | gateway plist-name | prefix plist-name }
in [interface-type num]
```

<i>listname</i>	acl
<b>gateway</b> <i>plist-name</i>	gateway
<b>prefix</b> <i>plist-name</i>	prefix-list
<b>interface-type</b> <i>num</i>	LSA

LSA

SPF

OSPF

ABR

ASBR

```
Ruijie(config)# access-list 3 permit 172.16.0.0
0.0.127.255
Ruijie(config)# router ospf 25
Ruijie(config-router)# redistribute rip metric 100
```

```
Ruijie(config-router)# distribute-list 3 in ethernet
1/0
Ruijie(config-router)# distribute-list 3 in ethernet
1/1
```

### 31.1.16 distribute-list out

#### redistribute

**distribute-list** {*listname* | **gateway** *plist-name* | **prefix** *plist-name*} **out**  
**[bgp | connected | isis** *area-tag* | **ospf** *process-id* | **rip | static]**

**no distribute-list** {*listname* | **gateway** *plist-name* | **prefix** *plist-name* }  
**out [bgp | connected | isis** *area-tag* | **ospf** *process-id* | **rip | static]**

<i>listname</i>	acl
<b>gateway</b> <i>plist-name</i>	gateway
<b>prefix</b> <i>plist-name</i>	prefix-list
<b>[bgp   connected   isis</b> <i>area-tag</i>   <b>ospf</b> <i>process-id</i>   <b>rip   static]</b>	

<b>distribute-list out</b>	<b>redistribute route-map</b>
OSPF	
<b>redistribute</b>	ACL
,	prefix-list
prefix-list	ACL
	,

```
Ruijie(config)# router ospf 1
Ruijie(config)# redistribute static subnets
Ruijie(config-router)# distribute-list 22 out static
Ruijie(config-router)# distribute-list prefix jjj
outstatic
% There already has filter configured. Please
re-configure.
```

### **31.1.17 enable mib-binding**

<b>show ip ospf</b>	OSPF
<b>enable traps</b>	OSPF TRAP

error traps  
error traps  
**ifauthfailure**  
**ifconfigerror**

**error**

<b>lsa</b>	lsa traps lsa traps <b>lsdbapproach overflow</b>  <b>lsdboverflow</b>  <b>maxagelsa originatelsa</b>
	31-23

L

<b>retransmit</b>	retransmit traps retransmit traps <b>iftxretransmit</b> <b>virtiftxretransmit</b>
-------------------	--

<p><b>state-change</b></p>	<p>state-change traps  state-change traps  <b>ifstatechange</b>  <b>nbrstatechange</b>  <b>virtifstatechange</b>  <b>virtnbrstatechange</b></p>
----------------------------	---

TRAP

**snmp-server**  
**enable traps ospf**

MIB

**snmp-server**

TRAP

OSPFv2 100 TRAP

```
Ruijie(config)# router ospf 100
Ruijie(config)# enable traps
```

<b>show ip ospf</b>	OSPF
<b>enable mib-binding</b>	OSPFv2 MIB

ī,ī •A¼

```

                                GR Help
      Grace-LSA
      Grace-LSA
disable                          GR Helper
                                GR
                                GR
GR
strict-lsa-checking             internal-lsa-checking
                                LSA(types 1-5,7)
                                LSA(types 1-3)
                                LSA
                                GR
                                GR Help
                                GR
                                AS
                                GR

```

OSPF 1 GR

```

Ruijie(config)# router ospf 1
Ruijie(config-router)# graceful-restart helper disable
Ruijie(config-router)# no graceful-restart helper
disable
Ruijie(config-router)# graceful-restart helper
strict-lsa-checking

```

<b>graceful-restart</b>	OSPF

RGOS10.3(5b1),

### 31.1.20 ip ospf authentication

no

```

ip ospf authentication [message-digest | null]
no ip ospf authentication

```

--	--

<b>message-digest</b>	MD5
<b>null</b>	

**no**

**null**

FastEthernet 0/0      OSPF      MD5

```
Ruijie(config)# interface fastethernet 0/0
Ruijie(config-if)# ip address 172.16.10.0
255.255.255.0
Ruijie(config-if)# ip ospf authentication
message-digest
```

<b>area authentication</b>	OSPF
<b>ip ospf authentication-key</b>	OSPF
<b>ip ospf message-digest-key</b>	OSPF MD5

### 31.1.21 ip ospf authentication-key

OSPF      **ip ospf**  
**authentication-key**      **no**

```
ip ospf authentication-key key  
no ip ospf authentication-key
```



### 31.1.23 ip ospf database-filter all out

```

, LSA LSA
no
ip ospf database-filter all out
no ip ospf database-filter

```


```

, LSA

LSA ,

LSA serial 1/0
Ruijie(config)# interface serial 1/0
Ruijie(config-if)# ip address 172.16.10.1
255.255.255.0
Ruijie(config-if)# encapsulation ppp
Ruijie(config-if)# ip ospf database-filter all out

```

### 31.1.24 ip ospf dead-interval

```

OSPF ip
ospf dead-interval no
ip ospf dead-interval seconds

```

**no ip ospf dead-interval**

<i>seconds</i>	

**ip ospf hello-interval**

OSPF                      Hello                      OSPF  
                             Hello  
                             hello                      4                      hello

OSPF

- hello
- 

                            serial 1/0                      OSPF  
 30  
 Ruijie(config)# **interface serial 1/0**  
 Ruijie(config-if)# **ip address 172.16.10.1**  
 255.255.255.0  
 Ruijie(config-if)# **encapsulation ppp**  
 Ruijie(config-if)# **ip ospf dead-interval 30**

<b>ip ospf hello-interval</b>	OSPF      Hello

**31.1.25 ip ospf disable all**

ospf

**ip ospf disable all**

**no ip ospf disable all**

**network area**

network                      ospf  
 OSPF                              OSPF

```
Ruijie(config)# interface serial 1/0
Ruijie(config-if)# ip address 172.16.10.1
255.255.255.0
Ruijie(config-if)# ip ospf disable all
```

### 31.1.26 ip ospf hello-interval

OSPF      Hello                      ip ospf  
**hello-interval                      no**  
**ip ospf hello-interval seconds**  
**no ip ospf hello-interval**

seconds	OSPF      hello

- 10
- PPP    HDLC                      10

- 10
- .25 30

hello hello OSPF

hello  
hello

serial 1/0 OSPF Hello

15

```
Ruijie(config)# interface serial 1/0
Ruijie(config-if)# ip address 172.16.10.1
255.255.255.0
Ruijie(config-if)# encapsulation ppp
Ruijie(config-if)# ip ospf hello-interval 15
```

<b>ip ospf dead-interval</b>	OSPF

### 31.1.27 ip ospf message-digest-key

OSPF MD5 ip ospf

MD5

**ip ospf message-digest-key**

OSPF  
OSPF

OSPF  
**authentication**

**area**

**ip ospf authentication**

RGOS

MD5

OSPF MD5

OSPF

FastEthernet 0/0

OSPF

hello5

```
Ruijie(config)# interface Serial 1/0
Ruijie(config-if)# ip address 172.16.24.2
255.255.255.0
Ruijie(config-if)# ip ospf authentication
message-digest
Ruijie(config-if)# ip ospf message-digest-key 10 md5
hello10
Ruijie(config-if)# ip ospf message-digest-key 5 md5
hello5
```

```
Ruijie(config)# interface Serial1/0
Ruijie(config-if)# no ip ospf message-digest-key 10 md5
hello10
```



<b>area authentication</b>	OSPF
----------------------------	------

**ip ospf authentication**

OSPF

ip ospf network

no

ip ospf network broadcast non-broadcast point-to-multipoint [ non-broadcast ] point-to-point

no ip ospf network broadcast non-broadcast point-to-multipoint [ non-broadcast ] point-to-point

<b>broadcast</b>	OSPF
<b>non-broadcast</b>	OSPF NBMA
<b>point-to-multipoint [non-broadcast]</b>	OSPF , non-broadcast
<b>point-to-point</b>	OSPF

- PPP SLIP X.25
- NBMA X.25
- 
- 

OSPF

- FDDI
- X.25
- HDLC PPP SLIP

OSPF

- (NBMA) NBMA SVC  
X.25 PVC  
OSPF NBMA  
Designated Router NBMA

- OSPF
  - OSPF
  - X.25
  - OSPF
  - X.25 map
  - frame-relay map X.25
  - OSPF X.25
  - OSPF
- 
- - X.25
  - IP
  - broadcast

```
Ruijie(config)# interface Serial1/0
Ruijie(config-if)# ip address 172.16.24.4
255.255.255.0
Ruijie(config-if)# encapsulation frame-relay
Ruijie(config-if)# ip ospf network broadcast
```

```
Ruijie(config)# interface Serial1/0
Ruijie(config-if)# ip address 172.16.24.4
255.255.255.0
Ruijie(config-if)# encapsulation frame-relay
Ruijie(config-if)# ip ospf network point-to-multipoint
```

DR/RDR

DR/BDR

```
Ruijie(config)# interface Serial1/0
Ruijie(config-if)# ip address 172.16.24.4 255.255.255.0
Ruijie(config-if)# encapsulation frame-relay
Ruijie(config-if)# ip ospf network broadcast
Ruijie(config-if)# ip ospf priority 0
```

<b>dialer map ip</b>	IP	
<b>frame-relay map</b>	IP	DLCI
<b>neighbor OSPF</b>	IP	NBMA
<b>X25 map</b>	IP	X.25

### 31.1.30 ip ospf priority

```

                OSPF
            no
ip ospf priority priority
no ip ospf priority
    
```

<i>Priority</i>	OSPF

```

OSPF                hello                OSPF
DR/BDR
                DR    BDR
                DR    BDR
                BDR    OSPF broadcast    non-broadcast    DR
    
```

---

r :

DR BDR  
DR BDR .

fastethernet 0/0 0

Ruijie(config)# **interface fastethernet**

```

virtual-link          retransmit-interval          LSU          area

```

```

serial 1/0          LSU          10

```

```

Ruijie(config)# interface serial 1/0
Ruijie(config-if)# ip ospf retransmit-interval 10

```

area virtual-link	OSPF

### 31.1.32 ip ospf transmit delay

```

OSPF          LSU          ip ospf
transmit delay          no
ip ospf transmit delay seconds
no ip ospf transmit delay

```

Seconds	OSPF          LSU 1

1

```

LSU          LSAs          Age
ip ospf transmit delay
LSU          area
virtual-link          retransmit-interval

```

```
RGOS      Age      3600   LSA
           LSA
```

```
serial1/0      5
```

```
Ruijie(config)# interface serial 1/0
Ruijie(config-if)# ip ospf transmit delay 10
```

<b>area virtual-link</b>	OSPF

### 31.1.33 log-adj-changes

no default

```
log-adj-changes [detail]
no log-adj-changes [detail]
```



<b>show ip ospf</b>	ospf

### 31.1.34 max-concurrent-dd

DD

**max-concurrent-dd** <1-65535>

<1-65535>	DD

5

OSPF

DD

DD

4

Ruijie(config)# **router ospf 10**

Ruijie(config-router)# **max-concurrent-dd 4**

### 31.1.35 neighbor

OSPF

**neighbor**

**no**

**neighbor** *ip-address* [**poll-interval** *seconds*] [**priority** *priority*] [**cost**

```
cost]
no neighbor ip-address
```

<i>ip-address</i>	IP
<b>poll-interval</b> <i>seconds</i>	120 Non-broadcast(NBMA)
<b>priority</b> <i>priority</i>	Non-broadcast(NBMA)
<b>Cost cost</b>	, cost point-to-multipoint [ non-broadcast ]

```
RGOS
IP                               IP
    NBMA
        Hello      OSPF          Hello      Hello
            0          OSPF
        DR/BDR      Hello          0
        Hello      DR/BDR          DR/BDR
            ,
            ,
            cost
            .
            OSPF          IP
172.16.24.2          1          150
Ruijie(config)# router ospf 20
Ruijie(config-router)# network 172.16.24.0 0.0.0.255
area 0
Ruijie(config-router)# neighbor 172.16.24.2 priority 1
poll-interval 150
```

<b>ip ospf priority</b>	OSPF
<b>ip ospf network</b>	OSPF

### 31.1.36 network area

OSPF                      OSPF

**network area                      no                      OSPF**

**network** *ip-address wildcard area area-id*

**no network** *ip-address wildcard area area-id*

<i>ip-address</i>	IP
<i>wildcard</i>	IP OSPF

```

0 1 172.16.16.0  IP
192.168.12.0/24 1 IP
172.16.16.0/20 172.16.16.0
0

```

```

Ruijie(config)# router ospf 20
Ruijie(config-router)# network 172.16.16.0
0.0.15.255 area 172.16.16.0
Ruijie(config-router)# network 192.168.12.0
0.0.0.255 area 1
Ruijie(config-router)# network 0.0.0.0 255.255.255.255
area 0

```

router ospf	OSPF

### 31.1.37 overflow database

OSPF LSA

```

overflow database <0-4294967294> hard | soft
no overflow database

```

<1-4294967294>	LSA
hard   soft	hard LSA OSPF soft LSA

```

OSPF hard OSPF
soft

```

LSA 10 OSPF 10

```
Ruijie# config terminal
Ruijie(config)# router ospf 10
Ruijie(config-router)# overflow database 10 hard
```

### 31.1.38 overflow database external

external LSA

**overflow database external** *max-dbsize wait-time*  
**no overflow database external**

<i>max-dbsize</i>	external lsa	AS
	0-2147483647	
<i>wait-time</i>		0-65535

external-LSA

external-LSA

external-LSA

external-LSA *max-dbsize*  
 external-LSA external-LSA  
*wait-time* external-LSA

```
Ruijie# config terminal
Ruijie(config)# router ospf 10
Ruijie(config-router)# overflow database external 10 3
```

### 31.1.39 overflow memory-lack

```

                                OSPF    OVERFLOW
no
overflow memory-lack
no overflow memory-lack
    
```

no	OSPF OVERFLOW

OSPF      OVERFLOW

```

OSPF    OVERFLOW

                                OSPF    OVERFLOW

                                NULL
                                OVERFLOW
                                clear ip ospf process
                                OSPF    OSPF
OVERFLOW
no      OSPF                    OVERFLOW
                                OSPF
    
```

```

OSPF                                OVERFLOW
Ruijie# config terminal
Ruijie(config)# router ospf 10
Ruijie(config-router)# no overflow memory-lack
    
```

--	--

<b>clear ip ospf process</b>	OSPF
<b>show ip protocols ospf</b>	OSPF

### 31.1.40 passive-interface

**no**

**passive-interface** [default | *type number*]

**no passive-interface** [default | *type number*]

<i>type number</i>	
<b>default</b>	

, OSPF

serial 1/0

Ruijie(config)# **router ospf 30**

Ruijie(config-router)# **passive-interface serial1/0**

<b>show ip ospf interface</b>	



```

BGP          metric 1          LSA
metric 20
isis         level            level-2
           level            level
           level 1, level 2
level-1-2
ospf        match
ospf        match            match
           match            no
match
           route-map        route-map match
           match level      OSPF  ISIS
           match level      route-map
    
```

OSPF

```

Ruijie(config-router)# redistribute static subnets
Ruijie(config)# router ospf 1
Ruijie(config-router)# redistribute ospf 2 subnets
Ruijie(config-router)# redistribute ospf 2 match
external 1 internal
Ruijie(config-router)# redistribute isis isis-001
Ruijie(config-router)# redistribute isis isis-001
level-1

Show run

router ospf 1
redistribute ospf 2 match external 1 internal subnets
redistribute isis isis-001 level-1-2
    
```

### 31.1.42 router ospf

```

no OSPF router ospf
OSPF
router ospf process-id [vrf vrf-name]
no router ospf process-id
    
```

<i>process-id</i>	ospf
<i>vrf-name</i>	OSPF          VRF VRF

OSPF

```

RGOS10.1                                     ospf
  ospf

                                     vrf vpn_1   OSPF   10
Ruijie(config)# router ospf 10 vrf vpn_1
    
```

<b>show ip protocols</b>	
<b>show ip ospf</b>	ospf

### 31.1.43 router-id

```

                                     ID,      no      Router
ID                                     Router ID

router-id router-id
no router-id
    
```

<i>router-id</i>	ID, IP

OSPF ip

ip

,

LSA

.

OSPF

loopback

ospf

router-id 0.0.0.36

Ruijie(config)# **router ospf 20**

Ruijie(config-router)# **router-id 0.0.0.36**

<b>show ip protocols</b>	

### 31.1.44 summary-address

OSPF

**summary-address no**

**summary-address** *ip-address net-mask* [**not-advertise** | **tag** <0-4294967295> | ]

<i>ip-address</i>	IP
<i>net-mask</i>	
<b>not-advertise</b>	

OSPF  
OSPF

**area rang**                      area range                      OSPF  
summary-address                      OSPF  
**NSSA**    **summary-address**                      NSSA    ABR

100.100.0.0/16

```
redRuijie(config)# router ospf 20
Ruijie(config-router)# summary-address 100.100.0.0
255.255.0.0
Ruijie(config-router)# redistribute static subnets
Ruijie(config-router)# network 200.2.2.0 0.0.0.255
area 1
Ruijie(config-router)# network 172.16.24.0 0.0.0.255
area 0
Ruijie(config-router)# area 1 nssa
```

<b>area range</b>	OSPF

### 31.1.45 timers lsa-group-pacing


LSA

**no**

**timers lsa-group-pacing** *seconds*

**no timers lsa-group-pacing**



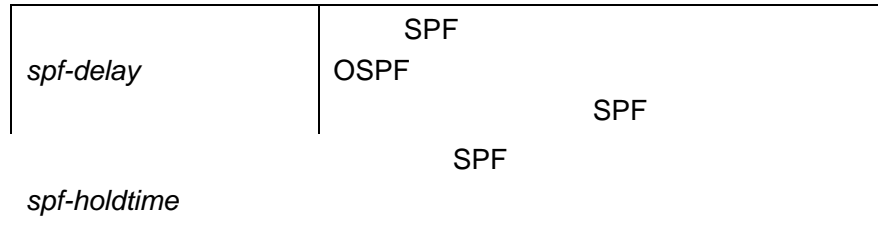

*spf-delay*

OSPF

SPF

SPF

*spf-holdtime*

### 31.1.47 timers throttle spf

```

OSPF
SPF
timers throttle spf no
timers throttle spf spf-delay spf-holdtime spf-max-waittime
no timers throttle spf
    
```

<i>spf-delay</i>	SPF 1-600000 OSPF SPF spf-delay
<i>spf-holdtime</i>	SPF 1-600000
<i>spf-max-waittime</i>	SPF 1-600000

```

spf-delay 1000
spf-holdtime 5000
spf-max-waittime 10000
    
```

```

spf-delay SPF
SPF SPF
spf-holdtime SPF
spf-max-waittime
SPF SPF
spf-holdtime
spf-delay spf-holdtime
spf-max-waittime SPF
    
```

**timers spf**

SPF

SPF

**timers throttle spf**

r :

1 spf-holdtime spf-delay spf-holdtime  
 spf-delay

2 spf-max-waittime spf-holdtime spf-max-waittime  
 spf-holdtime

3 timers throttle spf timers spf

4 timers spf

## OSPF

## show ip ospf

**show ip ospf** [*process-id*]

<i>process-id</i>	ospf

## OSPF

**show ip ospf**

```

Ruijie# show ip ospf
Routing Process "ospf 1" with ID 1.1.1.1
Process uptime is 4 minutes
Process bound to VRF default
Conforms to RFC2328, and RFC1583Compatibility flag
isenabled
Supports only single TOS(TOS0) routes
Supports opaque LSA
This router is an ASBR (injecting external routing
information)
SPF schedule delay 5 secs, Hold time between two SPFs
10 secs
LsaGroupPacing: 240 secs
Number of incoming current DD exchange neighbors 0/5
Number of outgoing current DD exchange neighbors 0/5
Number of external LSA 4. Checksum 0x0278E0
Number of opaque AS LSA 0. Checksum 0x000000
Number of non-default external LSA 4
External LSA database is unlimited.
Number of LSA originated 6
Number of LSA received 2
Log Neighbor Adjacency Changes : Enabled
Number of areas attached to this router: 1
Area 0 (BACKBONE)
Number of interfaces in this area is 1(1)

```

Number of fully adjacent neighbors in this area is 1  
 Area has no authentication  
 SPF algorithm last executed 00:01:26.640 ago  
 SPF algorithm executed 4 times  
 Number of LSA 3. Checksum 0x0204bf  
 Area 1 (NSSA)  
 Number of interfaces in this area is 1(1)  
 Number of fully adjacent neighbors in this area is 0  
 Number of fully adjacent virtual neighbors through this  
 area is 0  
 Area has no authentication  
 SPF algorithm last executed 02:09:23.040 ago  
 SPF algorithm executed 4 times  
 Number of LSA 6. Checksum 0x028638  
 NSSA Translator State isselected

OSPF BFD , "BFD is enabled",  
 0 -1.4457 7126 area cnform

**BFD is enabled**

Area 0 (BACKBONE)  
Number of interfaces in this area is 1(1)  
Number of fully adjacent neighbors in this area is 1  
Area has no authentication  
SPF algorithm last executed 00:01:26.640 ago  
SPF algorithm executed 4 times  
Number of LSA 3. Checksum 0x0204bf  
Area 1 (NSSA)  
Number of interfaces in this area is 1(1)  
Number of fully adjacent neighbors in this area is 0  
Number of fully adjacent virtual neighbors through this area  
is 0  
Area has no authentication  
SPF algorithm last executed 02:09:23.040 ago  
SPF algorithm executed 4 times  
Number of LSA 6. Checksum 0x028638  
**NSSA Translator State is elected**



Number of areas attached to this router		
---	--	--

Area type		
-----------	--	--

NSSA Translator State	LSA OSPF	NSSA LSA NSSA	External ABR
BFD is enabled		OSPF	BFD

### 31.2.2 show ip ospf border-routers

ABR/ASBR OSPF  
**show ip ospf border-routers**  
**show ip ospf [process-id] border-routers**

<i>process-id</i>	ospf

OSPF ABR ASBR OSPF  
**show ip route** OSPF  
 OSPF

#### show ip ospf border-routers

```
Ruijie# show ip ospf border-routers
OSPF internal Routing Table

Codes: i - Intra-area route, I - Inter-area route

i 1.1.1.1 [2] via 10.0.0.1, FastEthernet 0/1, ABR, ASBR,
Area 0.0.0.1 select
```

Codes	i
I	

1.1.1.1	OSPF
[2]	cost
via 10.0.0.1	
FastEthernet 0/1	
ABR, ASBR	ASBR ABR ASBR
Area 0.0.0.1	
select	ASBR select

### 31.2.3 show ip ospf database

OSPF

**show ip ospf** [*process-id area-id*] **database** [**asbr-summary**]  
[*link-state-id*]

**show ip ospf** [*process-id area-id*] **database** [**asbr-summary**]  
[*link-state-id*] [**adv-router ip-address**]

**show ip ospf** [*process-id area-id*] **database** [**asbr-summary**]  
[*link-state-id*] [**self-originate**]

**show ip ospf** [*process-id area-id*] **database** [**external**] [*link-state-id*]

**show ip ospf** [*process-id area-id*] **database** [**external**] [*link-state-id*]  
[**adv-router ip-address**]

**show ip ospf** [*process-id area-id*] **database** [**external**] [*link-state-id*]  
[**self-originate**]

**show ip ospf** [*process-id area-id*] **database** [**nssa-external**]  
[*link-state-id*]

**show ip ospf** [*process-id area-id*] **database** [**nssa-external**]  
[*link-state-id*] [**adv-router ip-address**]

**show ip ospf** [*process-id area-id*]**database** [**nssa-external**]  
[*link-state-id*] [**self-originate | maxage**]

**show ip ospf** [*process-id area-id*]**database** [**database-summary**]

<i>Area-id</i>	
<b>adv-router</b>	
<i>link-state-id</i>	OSPF
<b>self-originate</b>	
<b>maxage</b>	LSA
<b>router</b>	OSPF
<b>network</b>	OSPF
<b>summary</b>	OSPF
<b>asbr-summary</b>	ASBR
<b>external</b>	OSPF

<b>nssa-external</b>	OSPF
<b>opaque-area</b>	LSA
<b>opaque-as</b>	LSA
<b>opaque-link</b>	LSA
<b>database-summary</b>	OSPF LSA

OSPF

OSPF

**show ip ospf database**

```

Ruijie# show ip ospf database
      OSPF Router with ID (1.1.1.1) (Process ID 1)

      Router Link States (Area 0.0.0.0)
Link ID          ADV Router      Age  Seq#          CkSum
Link count
1.1.1.1          1.1.1.1          2   0x80000011  0x6f39 2
3.3.3.3          3.3.3.3          120 0x80000002  0x26ac 1

      Network Link States (Area 0.0.0.0)

Link ID          ADV Router      Age  Seq#          CkSum
192.88.88.27    1.1.1.1          120 0x80000001  0x5366

      Summary Link States (Area 0.0.0.0)

Link ID          ADV Router      Age  Seq#          CkSum
Route
10.0.0.0         1.1.1.1          2   0x80000003  0x350d
10.0.0.0/24
100.0.0.0        1.1.1.1          2   0x8000000c  0x1ecb
100.0.0.0/16

      Router Link States (Area 0.0.0.1 [NSSA])

```

```

Link ID          ADV Router      Age  Seq#          CkSum
Link count
1.1.1.1          1.1.1.1         2   0x80000001  0x91a2 1
    
```

Summary Link States (Area 0.0.0.1 [NSSA])

```

Link ID          ADV Router      Age  Seq#          CkSum
Route
100.0.0.0        1.1.1.1         2   0x80000001  0x52a4
100.0.0.0/16
192.88.88.0      1.1.1.1         2   0x80000001  0xbb2d
192.88.88.0/24
    
```

NSSA-external Link States (Area 0.0.0.1 [NSSA])

```

Link ID          ADV Router      Age  Seq#          CkSum
Route            Tag
20.0.0.0         1.1.1.1         1   0x80000001  0x033c E2
20.0.0.0/24      0
100.0.0.0        1.1.1.1         1   0x80000001  0x9469 E2
100.0.0.0/28     0
    
```

AS External Link States

```

Link ID          ADV Router      Age  Seq#          CkSum
Route            Tag
20.0.0.0         1.1.1.1        380  0x8000000a  0x7627
E2 20.0.0.0/24   0
100.0.0.0        1.1.1.1        620  0x8000000a  0x0854
E2 100.0.0.0/28  0
    
```

**show ip ospf database**

OSPF Router with ID	OSPF OSPF
Router Link States	
Net Link States	
Summary Net Link States	
NSSA-external Link States	
AS External Link States	
Link ID	
ADV Router	

Age	
Seq#	LSA
Cksum	
Link-Count	
Route	LSA
Tag	

**show ip ospf database asbr-summary**

```
Ruijie# show ip ospf database asbr-summary
OSPF Router with ID (1.1.1.35) (Process ID 1)
ASBR-Summary Link States (Area 0.0.0.1)
LS age: 47
Options: 0x2 (*|-|-|-|-|E|-)
LS Type: ASBR-summary-LSA
Link State ID: 3.3.3.3 (AS Boundary Router address)
Advertising Router: 1.1.1.1
LS Seq Number: 80000001
Checksum: 0xbe8c
Length: 28
Network Mask: /0
TOS: 0 Metric: 1
```

**show ip ospf database asbr-summary**

OSPF Router with ID	OSPF
AS Summary Link States	AS
LS age	
Options	
LS Type	
Link State ID	
Advertising Router	
LS Seq Number	
Checksum	

Length	
Network Mask	
TOS	TOS 0
Metric	

**show ip ospf database external**

```
Ruijie# show ip ospf database external
OSPF Router with ID (1.1.1.35) (Process ID 1)
AS External Link States
LS age: 752
Options: 0x2 (*|---|E|)
LS Type: AS-external-LSA
Link State ID: 20.0.0.0 (External Network Number)
Advertising Router: 1.1.1.1
LS Seq Number: 8000000a
Checksum: 0x7627
Length: 36
Network Mask: /24
Metric Type: 2 (Larger than any link state path)
TOS: 0
Metric: 20
Forward Address: 0.0.0.0
External Route Tag: 0
```

**show ip ospf database external**

Length	
Network Mask	
Metric Type	
TOS	TOS            0
Metric	
Forward Address	0.0.0.0            IP
External Route Tag	OSPF            32 OSPF

**show ip ospf database network**

```
Ruijie# show ip ospf database network
OSPF Router with ID (1.1.1.1) (Process ID 1)
Network Link States (Area 0.0.0.0)

LS age: 572
Options: 0x2 (*|-|-|-|-|E|-)
LS Type: network-LSA
Link State ID: 192.88.88.27 (address of Designated
Router)
Advertising Router: 1.1.1.1
LS Seq Number: 80000001
Checksum: 0x5366
Length: 32
Network Mask: /24
Attached Router: 1.1.1.1
Attached Router: 3.3.3.3
```

**show ip ospf database network**

OSPF Router with ID	OSPF
Network Link States	
LS age	
Options	
LS Type	

Link State ID	
Advertising Router	
LS Seq Number	
Checksum	
Length	
Network Mask	
Attached Router	

**show ip ospf database router**

```

Ruijie# show ip ospf database router
OSPF Router with ID (1.1.1.1) (Process ID 1)
Router Link States (Area 0.0.0.0)
LS age: 322
Options: 0x2 (*|---|E|)
Flags: 0x3 : ABR ASBR
LS Type: router-LSA
Link State ID: 1.1.1.1
Advertising Router: 1.1.1.1
LS Seq Number: 80000012
Checksum: 0x6d3a
Length: 48
Number of Links: 2

Link connected to: Stub Network
(Link ID) Network/subnet number: 100.0.1.1
(Link Data) Network Mask: 255.255.255.255
Number of TOS metrics: 0
TOS 0 Metric: 0
    
```

**show ip ospf database router**

OSPF Router with ID	OSPF
Router Link States	
LS age	
Options	
Flag	router
LS Type	



Link State ID	
Advertising Router	
LS Seq Number	
Checksum	
Length	
Network Mask	
TOS	TOS            0
Metric	

**show ip ospf databa]unssa exutena**

Options	
LS Type	
Link State ID	
Advertising Router	
LS Seq Number	
Checksum	
Length	
Network Mask	
Metric Type	
TOS	TOS            0
Metric	
NSSA:Forward Address	0.0.0.0            IP
External Route Tag	32 OSPF OSPF

**show ip ospf database external**

```

Ruijie# show ip ospf database external
OSPF Router with ID (1.1.1.1) (Process ID 1)
AS External Link States
LS age: 1290
Options: 0x2 (*|---|---|E|)
LS Type: AS-external-LSA
Link State ID: 20.0.0.0 (External Network Number)
Advertising Router: 1.1.1.1 ExterMask: / 0.xternal-LSA than any ll.
    
```

OSPF Router with ID	OSPF
Type-7 AS External Link States	
LS age	
Options	
LS Type	
Link State ID	
Advertising Router	
LS Seq Number	
Checksum	
Length	
Network Mask	
Metric Type	
TOS	TOS            0
Metric	
Forward Address	0.0.0.0            IP
External Route Tag	OSPF            32 OSPF

**show ip ospf database database-summary**

```
Ruijie# show ip ospf database database-summary
OSPF process 1:
Router Link States      : 4
Network Link States    : 2
Summary Link States    : 4
ASBR-Summary Link States : 0
AS External Link States : 4
NSSA-external Link States: 2
```

**show ip ospf database database-summary**

OSPF Process	
Router Link	OSPF LSA
Network Link	OSPF LSA
Summary Link	OSPF LSA
ASBR-Summary Link	OSPFASBR LSA
AS External Link	OSPF LSA
NSSA-external Link	,OSPF NSSA LSA

### 31.2.4 show ip ospf interface

```

OSPF
ospf interface
show ip
show ip ospf interface [interface-type interface-number]

```

<i>interface-type</i>	
<i>interface-number</i>	

OSPF OSPF

```

show ip ospf interface FastEthernet 1/0
Ruijie# show ip ospf interface fa 1/0
FastEthernet 1/0 is up, line protocol is up

```

Internet Address 192.88.88.27/24, Ifindex 4, Area  
0.0.0.0, MTU 1500  
Matching network config: 192.88.88.0/24  
Process ID 1, Router ID 1.1.1.1, Network Type

FastEthernet 0/0 State	Down	UP
Internet Address	IP	
Area	OSPF	
MTU	MTU	
Matching network config	OSPF	network area
Process ID		
Router ID	OSPF	
Network Type	OSPF	
Cost	OSPF	
Transmit Delay is	OSPF	
State	DR/BDR	
Priority		
Designated Router(ID)	DR	
DR's Interface address	DR	
Backup designated router(ID)	BDR	
BDR's Interface address	BDR	
Time intervals configured	Retransmit	Hello Dead Wait
Hello due in	HELLO	
Neighbor count		
Adjacent neighbor count	Full	
Crypt Sequence Number	md5	
Hello received send	HELLO	
DD received send	DD	
LS-Req received send	LS	
LS-Upd received send	LS	
LS-Ack received send	LS	
Discard	OSPF	
BFD enabled	OSPF	BFD

*neighbor-dh(JT/JT3 1 Tf12.7143 2 TD0 Tc<02c409c345dd02c51c122f0e1 04 re.0022 4d8*

### 31.2.5 show ip ospf neighbor

OSPF show ip ospf  
neighbor

**show ip ospf** [*process-id*] **neighbor** [[**detail**] | [[*interface-type*  
*interface-number*] [*neighbor-id*]]]

<b>detail</b>	
<i>interface-type</i>	
<i>interface-number</i>	

```

Neighbor priority is 1, State is Full, 11 state changes
DR is 192.88.88.27, BDR is 192.88.88.72
Options is 0x52 (*|O|-|EA|-|-|E|-)
Dead timer due in 00:00:32
Neighbor is up for 05:11:27
Database Summary List 0
Link State Request List 0
Link State Retransmission List 0
Crypt Sequence Number is 0
Thread Inactivity Timer on
Thread Database Description Retransmission off
Thread Link State Request Retransmission off
Thread Link State Update Retransmission off
Thread Poll Timer on
BFD session state up
    
```

**show ip ospf neighbor**

Neighbor ID	
Pri	DR
State	
Dead Time	Dead
Address	
Interface	
interface address	
In the area	
via interface	

Neighbor priority

OSPF

BDR	( Hello BDR )
Options	Hello E 0

```
Ruijie# show ip ospf route
OSPF process 1:
Codes: C - connected, D - Discard, O - OSPF,
IA - OSPF inter area N1 - OSPF NSSA external type 1,
N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
E2 100.0.0.0/24 [1/20] via 192.88.88.126, FastEthernet
1/0
C    192.88.88.0/24 [1] is directly connected,
FastEthernet 1/0, Area 0.0.0.1
```

**show ip ospf route**

codes	
100.0.0.0/24	
[1]	cost
via	

### 31.2.7 show ip ospf summary-address

OSPF

**show ip ospf summary-address**

**show ip ospf summary-address**

NSSA ABR

**show ip ospf summary-address**

Ruijie# **show ip ospf summary-address**

**show ip ospf neighbor****show ip ospf virtual-links**

```
Ruijie# show ip ospf virtual-links
Virtual Link VLINK0 to router 1.1.1.1 is up
Transit area 0.0.0.1 via interface FastEthernet 0/1
Local address 10.0.0.37/32
Remote address 10.0.0.27/32
Transmit Delay is 1 sec, State Point-To-Point,
Timer intervals configured, Hello 10, Dead 40, Wait 40,
Retransmit 5
Hello due in 00:00:05
Adjacency state Full
```



---

# 32

## 32.1

### 32.1.1 distribute-list in

**distribute-list in**                      **no**

**distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*  
[**gateway** *prefix-list-name*]} **in** [*interface-type* *interface-number*]

**no distribute-list** {[*access-list-number* | *name*] | **prefix** *prefix-list-name*  
[**gateway** *prefix-list-name*]} **in** [*interface-type* *interface-number*]

<i>access-list-number</i>	
<b>prefix</b> <i>prefix-list-name</i>	
<b>gateway</b> <i>prefix-list-name</i>	
<i>interface-type</i> <i>interface-number</i>	(    )


OSPF

OSPF

RIP      Fastethernet 0/0  
172.16

---

```
router rip
network 200.168.23.0
distribute-list 10 in fastethernet 0/0
no auto-summary
!
access-list 10 permit 172.16.0.0 0.0.255.255
```



---

OSPF  
OSPF

RIP

192.168.12.0/24

```
router rip
network 200.4.4.0
network 192.168.12.0
distribute-list 10 out
version 2
access-list 10 permit 192.168.12.0
```

<b>access-list</b>	
<b>prefix-list</b>	
<b>redistribute</b>	

### 32.1.3 ip community-list

**no**

**ip community-list** {[**standard** | **expanded**] *community-list-name* | *community-number*} {**permit** | **deny**} [*community-number*]

**no ip community-list** {**standard** | **expanded**} {*community-list-name* | *community-number*}

<i>community-list-name</i>	32
<b>standard</b>	1..99
<b>expanded</b>	100
<b>permit</b>	
<b>deny</b>	

---

		AA:NN(	/2
	)		
	internet	Internet	
	no-export		EBGP
<i>community-number</i>	peers		
	no-advertise		
	BGP peers		
	local-as		AS
	1..255		

---

**no ip default-network network**

<i>network</i>	

0.0.0.0/0

**default-network**

\*\*\*

connected

192.168.100.0

```
ip route 192.168.100.0 255.255.255.0 serial 0/1
ip default-network 192.168.100.0
```

200.200.200.0

200.200.200.0

```
ip default-network 200.200.200.0
```

<b>show ip route</b>	IP

### 32.1.5 ip prefix-list

**no**

**ip prefix-list**

---

```
ip prefix-list prefix-lis-name [ seq seq-number] { deny | permit }  
ip-prefix [ge minimum-prefix-length][ le maximum-prefix-length]  
no ip prefix-list prefix-lis-name[ seq seq-number] { deny | permit}  
ip-prefix [ge de70.0022 Tc[ Jj/TT5 1 Tf0.Tc0-5.2(64j/ Tf0.2 4 TfTw(Jj/TT14 1 Tf1.44 0 TD-
```

---

```

        minimum-prefix-length    maximum-prefix-length    ip-prefix
        minimum-prefix-length    maximum-prefix-length
ip-prefix    < minimum-prefix-length < maximum-prefix-length <=
32

```

```

                                OSPF                RIP
                                IP                    IP
        (                IP    201.1.1.0/24
        )

```

```

Ruijie# configure terminal
Ruijie(config)# ip prefix-list pre1 permit 201.1.1.0/24
Ruijie(config)# router ospf
Ruijie(config-router)# distribute-list prefix pre1 out
rip
Ruijie(config-router)# end

```

### 32.1.6 ip prefix-list description

#### ip prefix-list description

**no**

**ip prefix-list** *prefix-lis-name* **description** *descripton-text*

<i>prefix-lis-name</i>	
<i>descripton-text</i>	

```

                                OSPF                RIP
                                IP                    IP
        (                IP    201.1.1.0/24
        )

```

```

Ruijie# configure terminal

```

---

```
Ruijie(config)# ip prefix-list pre description Deny
routes from Net-A
```

### 32.1.7 ip prefix-list sequence-number

```
no
ip prefix-list description
ip prefix-list sequence-number
```

```
OSPF
RIP
IP
IP 201.1.1.0/24
```

```
Ruijie# configure terminal
Ruijie(config)# ip prefix-list pre description Deny
routes from Net-A
```

### 32.1.8 ip route

```
ip route no
```

```
ip route [vrf vrf_name] network net-mask {ip-address | interface
[ip-address]} [distance] [tag tag] [permanent] [weight number] [disable |
enable]
```

<i>vrf_name</i>	VRF
<i>network</i>	

---

<i>net-mask</i>	
<i>ip-address</i>	
<i>interface</i>	
<i>distance</i>	
<i>tag</i>	Tag
<b>permanent</b>	
<i>number</i>	
<b>disable/enable</b>	

1

OSPF 110  
125 OSPF

vrf vrf

1 **show ip route weight**  
weight WCMP

weight

WCMP 32  
WCMP

route 0.0.0.0 0.0.0.0 Fastethernet 0/0

ip

---

```
172.16.100.0/24
192.168.12.1      115
ip route 172.16.100.0 255.255.255.0 192.168.12.1 115
```

```
172.16.100.0/24      fastethernet 0/0

ip route 172.16.100.0 255.255.255.0 fastethernet 0/0
192.168.12.1
```

<b>show ip route</b>	IP

---

### 32.1.10 ip static route-limit

**ip static route-limit**

no

**ip static route-limit** *number*

**ip static route-limit** *number*

<i>number</i>	1-10000

1000

**ip static**

**route-limit**

**show running config**

900

ip static route-limit 900

### 32.1.11 ipv6 prefix-list

IPv6

**ipv6**

**prefix-list**

**no**

**ipv6 prefix-list** *prefix-lis-name* [ **seq** *seq-number* ] { **deny** | **permit** }

*ipv6-prefix* [ **ge** *minimum-prefix-length* ] [ **le** *maximum-prefix-length* ]

**no ipv6 prefix-list** *prefix-lis-name* [ **seq** *seq-number* ] { **deny** | **permit** }

*ipv6-prefix* [ **ge** *minimum-prefix-length* ] [ **le** *maximum-prefix-length* ]

---

<i>prefix-lis-name</i>	
<i>seq-number</i>	1 2147483647  5  5
<b>deny</b>	
<b>permit</b>	

```

RIP
OSPF
IPv6
(
IP 2222::/64
)

Ruijie# configure terminal
Ruijie(config)# ipv6 prefix-list pre permit 2222::/64
Ruijie(config)# ipv6 router rip
Ruijie(config-router)# distribute-list prefix pre out
ospf
Ruijie(config-router)# end

```

### 32.1.12 ipv6 prefix-list description

```

IPv6
description no
ipv6 prefix-list
ipv6 prefix-list prefix-lis-name description descripton-text

```

<i>prefix-lis-name</i>	IPv6
<i>descripton-text</i>	IPv6

```

OSPF
RIP
IP
(
IP 201.1.1.0/24
)

```

---

IPv6



---

**match community**

6

**exact-match**

**set match 1 match 1 set**

```
ip community-list 1 permit 100:2 100:30
route-map set_lopref
match community 1 exact-match
set local-preference 20
```

<b>match as-path</b>	AS_PATH
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.16 match interface

**interface**

**match**

---

<i>interface-type</i>	
<i>interface-number</i>	

**match interface**

OSPF

RIP

RIP

OSPF

route maps

**set**

**match**

1

**match**

1

RIP

---

<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.17 match ip address

**match ip address**                      **no**

**match ip address** {*access-list-number* [*access-list-number...* |  
*access-list-name...*] | *access-list-name* [*access-list-number...* |  
*access-list-name*] | **prefix-list** *prefix-list-name* [*prefix-list-name...*]}

**no match ip address** {*access-list-number* [*access-list-number...* |  
*access-list-name...*] | *access-list-name* [*access-list-number...* |  
*access-list-name*] | **prefix-list** *prefix-list-name* [*prefix-list-name...*]}

<i>access-list-number</i>	
<i>access-list-name</i>	
<b>prefix-list</b> <i>prefix-list-name</i>	

**match ip address**

---

OSPF

OSPF

RIP

RIP

IP

---

set tag	
---------	--

### 32.1.18 match ip next-hop

IP


**match ip next-hop**                      **no**

**match ip next-hop** {*access-list-number* [*access-list-number...* | *access-list-name...*] | *access-list-name* [*access-list-number...* | *access-list-name*] | **prefix-list** *prefix-list-name* [*prefix-list-name...*]}

**no match ip next-hop** {*access-list-number* [*access-list-number...* | *access-list-name...*] | *access-list-name* [*access-list-number...* | *access-list-name*] | **prefix-list** *prefix-list-name* [*prefix-list-name...*]}

<i>access-list-number</i>	
<i>access-list-name</i>	
<b>prefix-list</b> <i>prefix-list-name</i>	

#### match ip next-hop

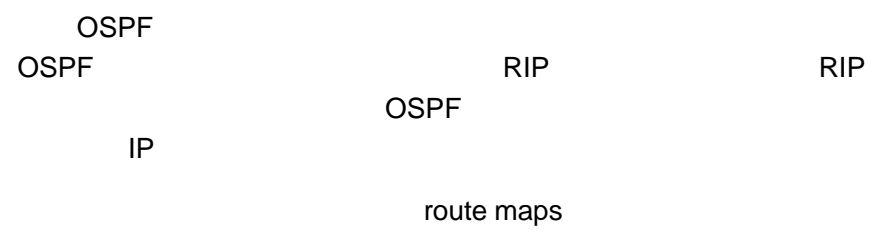

---

```

set match 1 match 1
set match 1 set

```

```

OSPF RIP RIP
10 20 OSPF

```

```

router ospf
redistribute rip subnets route-map redrip
network 192.168.12.0 0.0.0.255 area 0
access-list 10 permit 192.168.100.1
access-list 20 permit 172.16.10.1
route-map redrip permit 10
match ip next-hop 10 20

```

<b>access-list</b>	
<b>match ip address</b>	
<b>match interface</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.19 match ip route-source

```

IP
match ip route-source no

```

```



match ip route-source {access-list-number [access-list-number... |

```

---

*access-list-name...* | *access-list-name* [~~#~~]~~access-list-name~~

---

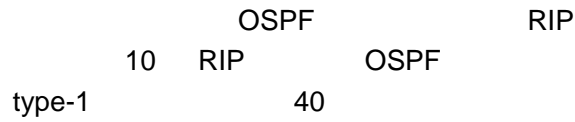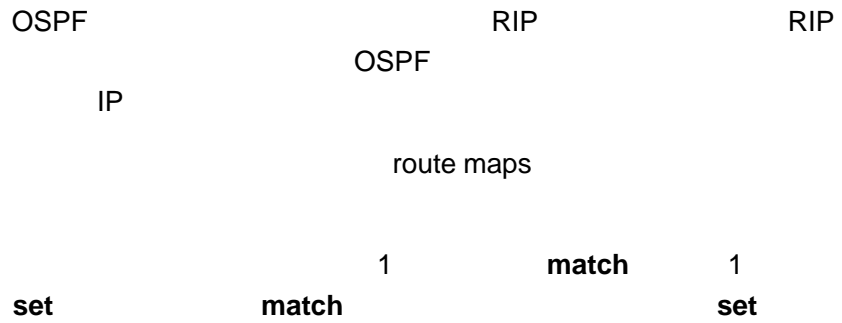

```

ipv6 router ospf
redistribute rip subnets route-map redrip
ipv6 access-list v6acl
10 permit ipv6 2620::/64 any
route-map redrip permit 10
match ipv6 address v6acl
set metric 30
  
```

<b>ipv6 access-list</b>	IPv6
<b>match interface</b>	
<b>match ipv6 next-hop</b>	IPv6
<b>match ipv6 route-source</b>	IPv6
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

---

## 32.1.21 match ipv6 next-hop

IPv6

**match ipv6 address**                    **no**

**match ipv6 next-hop** { *access-list-name* | **prefix-list** *prefix-list-name* }

**no match ipv6 next-hop**




---

10    OSPF  
      RIP

RIP

<i>access-list-name</i>	
<b>prefix-list</b> <i>prefix-list-name</i>	IPv6

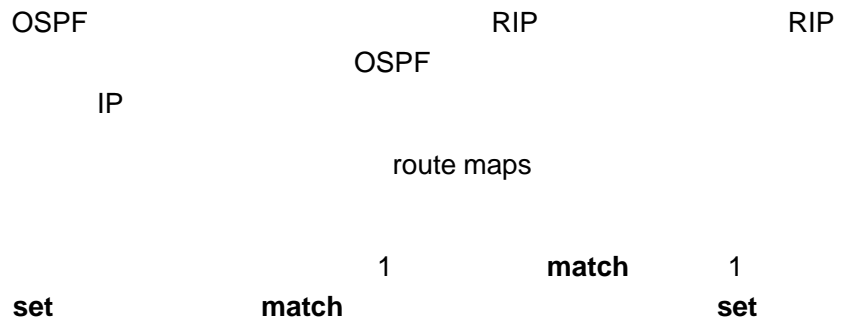

```

10 OSPF RIP OSPF RIP
type-1 40
  
```

```

ipv6 router ospf
redistribute rip subnets route-map redrip
ipv6 access-list v6acl
10 permit ipv6 5200::/64 any
route-map redrip permit 10
match ipv6 route-source v6acl
set metric 50
  
```

<b>ipv6 access-list</b>	IPv6

<b>match interface</b>	
<b>match ipv6 address</b>	IPv6
<b>match ipv6 route-source</b>	IPv6
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.23 match length

IP **match**  
**length** **no**  
**match length** *min-length max-length*  
**no match length** *min-length max-length*

<i>min-length</i>	IP
<i>max-length</i>	IP

serial 1/0 500  
 fastethernet 1/0

```
interface fastethernet 1/0
ip policy route-map smallpak
```

```
route-map smallpak permit 10
match length 0 500
set interface fastethernet 0/0
```

<b>route-map</b>	
<b>match ip address</b>	
<b>set default interface</b>	
<b>set interface</b>	
<b>set ip default next-hop</b>	IP
<b>set ip next-hop</b>	IP
<b>set ip precedence</b>	IP

### 32.1.24 match metric

**match metric**


**no**

**match metric *metric***

**no match metric**

--	--

<i>Metric</i>	0-4294967295
---------------	--------------

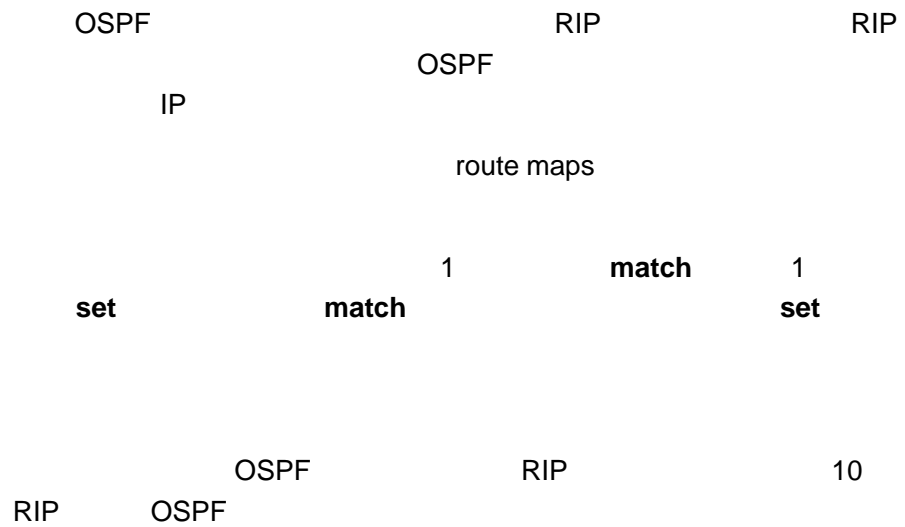

```
router ospf
redistribute rip subnets route-map redist-rip
network 192.168.12.0 0.0.0.255 area 0

route-map redist-rip permit 10
match metric 10
```

<b>access-list</b>	
<b>match ip address</b>	
<b>match interface</b>	
<b>match ip next-hop</b>	
<b>match ip route-source</b>	
<b>match route-type</b>	
<b>match tag</b>	

---

<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.25 match origin

**match**

**origin**            **no**

**match origin {egp | igp | incomplete}**


**no match origin {egp | igp | incomplete}**

<b>egp</b>	EGP
<b>igp</b>	IGP
<b>Incomplete</b>	

```
route-map MY_MAP 10 permit
match origin egp
set community 109
```

```
route-map MAP20 20 permit
match origin incomplete
set community no-export
```



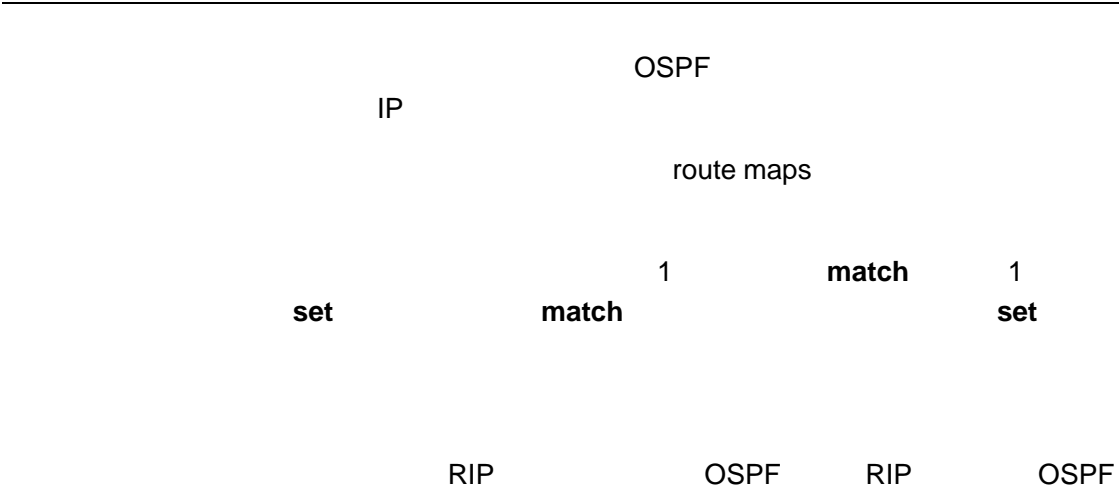

```

router rip
redistribute ospf route-map redrip
network 192.168.12.0

route-map redrip permit 10
match route-type internal

```

<b>access-list</b>	
<b>match ip address</b>	
<b>match interface</b>	
<b>match ip next-hop</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

**32.1.27 match tag**

---

**match tag**

**no**

**match tag** *tag [...tag]*

**no match tag** *tag [...tag]*

---

<b>match ip address</b>	
<b>match interface</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match ip next-hop</b>	
<b>match route-type</b>	
<b>set metric</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.28 maximum-paths

**maximum-paths**

no

**maximum-paths** *number*

**no maximum-paths** *number*

<i>number</i>	1-32

32

**maximum-paths**

**show running**

**config**

```
maximum-paths 10
no maximum-paths
```

### 32.1.29 route-map

**route-map**

**no**

```
route-map route-map-name [permit | deny] [sequence-number]
no route-map route-map-name [permit | deny] [sequence-number]
```

<i>route-map-name</i>	
<b>permit</b>	<pre> match                permit                     set                     set                     set                     permit                     match                     set                     </pre>
<b>deny</b>	<pre> match                deny                     deny                     match                     set                     </pre>
<i>sequence-number</i>	

---

RGIOS

OSPF

RIP

RIP

OSPF

IP

route maps

**set**

**match**

1

**match**

1

**set**

1)

10

*sequence-number*

2)

*sequence-number*

2

PBR Policy-Based Routing

IP

IP

IP

match

set

match

match ip address match length

set set ip tos set ip precedence set ip dscp set ip [default]

next-hop set ip next-hop verify-availability set [default] interface

4 RIP

OSPF  
OSPF

RIP

type-1

40

40

router ospf

redistribute rip subnets route-map redrip

---

```
network 192.168.12.0 0.0.0.255 area 0
```

```
route-map redrip permit 10  
match metric 4  
set metric 40  
set metric-type type-1  
set tag 40
```

<b>Redistribute</b>	

### 32.1.30 set aggregator as

```
match AS  
set aggregator as no
```

```
set aggregator as as-num ip_addr
```

```
no set aggregator as [as-num ip_addr]
```

<i>as-number</i>	AS
<i>ip_addr</i>	

---

```
match as-path 1
set aggregator as 3 2.2.2.2
```



---

<b>match as-path</b>	AS_PATH
<b>match community</b>	
<b>match metric</b>	
<b>match origin</b>	
<b>set community</b>	COMMUNITY
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.32 set comm-list delete

```

match                COMMUNITY_LIST
community            set comm-list delete
no

```

```

set comm-list community-list-number | community-list-name delete
no comm-list community-list-number | community-list-name delete

```

<i>community-list-number</i>	
<i>community-list-name</i>	

```

router bgp 100
neighbor 172.16.233.33 remote-as 120
neighbor 172.16.233.33 route-map ROUTEMAPIN in
neighbor 172.16.233.33 route-map ROUTEMAPOUT out

```

---

```
ip community-list 500 permit 100:10
ip community-list 500 permit 100:20
```

```
ip community-list 120 deny 100:50
ip community-list 120 permit 100:.*
```

```
route-map ROUTEMAPIN permit 10
set comm-list 500 delete
```

```
route-map ROUTEMAPOUT permit 10
set comm-list 120 delete
```

--	--

**match as-path**

AS\_Pr6e[4.0057f055-8 123215fb>-ccc07610

---

```
route-map SET_COMMUNITY 10 permit
match as-path 1
set community 109:10
```

```
route-map SET_COMMUNITY 20 permit
match as-path 2
set community no-export
```

<b>match as-path</b>	AS_PATH
<b>match community</b>	
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH
<b>set origin</b>	
<b>set metric-type</b>	

### 32.1.34 set dampening

match

---

<i>half-life</i>	1..45( )	15
<i>reuse</i>	1..20000	750
<i>suppress</i>	1..20000	2000
<i>max-suppress-time</i>	1..255( )	4* half-life

```

route-map tag
match as path 10
set dampening 30 1500 10000 120

```

```

router bgp 100
neighbor 172.16.233.52 route-map tag in

```

<b>match as-path</b>	AS_PATH
<b>match community</b>	
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH
<b>set metric</b>	
<b>set local-preference</b>	

### 32.1.35 set default interface

---

match

**set default interface**

**no**

**set default interface** *interface-type interface-number [...interface-type interface-number]*

**no set default interface** *interface-type interface-number [...interface-type interface-number]*

<i>interface-type</i>	
<i>interface-number</i>	

**set default interface**

1

---

<b>route-map</b>	
<b>match ip address</b>	
<b>match length</b>	
<b>set interface</b>	
<b>set ip default next-hop</b>	IP
<b>set ip next-hop</b>	IP
<b>set ip precedence</b>	IP

### 32.1.36 set extcommunity

match  
**set extcommunity**                    **no**

**set extcommunity** {rt *extend-community-value* | **soo**  
*extend-community-value*}

**no set extcommunity** {rt | **soo**}



```

access-list 2 permit 192.168.78.0 255.255.255.0
route-map MAP_NAME permit 10
match ip-address 2
set extcommunity rt 100:2

```

<b>match as-path</b>	AS_PATH
<b>match community</b>	
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.37 set interface

```

match set
interface no
set interface interface-type interface-number [...interface-type interface-number]
no set interface interface-type interface-number [...interface-type interface-number]

```

<i>interface-type</i>	
<i>interface-number</i>	

---

### 32.1.38 set ip default next-hop

match IP  
**set ip next-hop no**

**set ip default next-hop** *ip-address* [*weight*] [...*ip-address* [*weight*]]  
**no set ip default next-hop** *ip-address* [*weight*] [...*ip-address* [*weight*]]

<i>ip-address</i>	IP
<i>weight</i>	

set WCMP WCMP weight  
 WCMP  
**set ip default next-hop** IP 32  
 ip address weight 4  
 nexthop  
 next-hop weight set  
 WCMP WCMP  
 weight

---

(nexthop)

1

set

1	1.1.1.1	
	6.6.6.6	2.2.2.2
		7.7.7.7

```
access-list 1 permit ip 1.1.1.1 0.0.0.0
access-list 2 permit ip 2.2.2.2 0.0.0.0
```

```
interface async 1
ip policy route-map equal-access
```

```
route-map equal-access permit 10
match ip address 1
set ip default next-hop 6.6.6.6
route-map equal-access permit 20
match ip address 2
set ip default next-hop 7.7.7.7
route-map equal-access permit 30
set default interface null0
```



---

<b>set ip next-hop</b>	IP
<b>set ip precedence</b>	IP

### 32.1.39 set ip dscps

match DSCP **set ips**  
**dscp no**  
**set ip dscps** *dscp\_value*  
**no set ip dscp**

	DSCP

<b>route-maps</b>	
<b>match ip address</b>	

Ⓜ@

---

### 32.1.40 set ip next-hop

match IP  
**set ip next-hop** no

**set ip next-hop** *ip-address* [*weight*] [...*ip-address* [*weight*]]  
**no set ip next-hop** *ip-address* [*weight*] [...*ip-address* [*weight*]]

<i>ip-address</i>	IP
<i>weight</i>	

set WCMP WCMP  
WCMP weight  
**set ip next-hop** IP 32

---

set

serial 1/0

10.0.0.0/8

192.168.100.1

172.16.0.0/16

172.16.100.1

```
interface serial 1/0
```

```
ip policy route-map load-balance
```

```
access-list 10 permit 10.0.0.0 0.255.255.255
```

```
access-list 20 permit 172.16.0.0 0.0.255.255
```

```
route-map load-balance permit 10
```

```
match ip address 10
```

```
set ip next-hop 192.168.100.1
```

```
route-map load-balance permit 20
```

```
match ip address 20
```

```
set ip next-hop 172.16.100.1
```

```
route-map load-balance permit 30
```

```
set interface Null0
```



---

### 32.1.41 set ip next-hop verify-availability

IP set ip  
next-hop verify-availability no

set ip next-hop verify-availability *ip-address* track *track-object-num*  
no set ip next-hop *ip-address* [*weight*] [...*ip-address* [*weight*]

<i>ip-address</i>	IP
<i>track-object-num</i>	

```
serial 1/0
 10.0.0.0/8          192.168.100.1
 172.16.0.0/16     172.16.100.1

interface serial 1/0
ip policy route-map load-balance

access-list 10 permit 10.0.0.0 0.255.255.255
access-list 20 permit 172.16.0.0 0.0.255.255

route-map load-balance permit 10
match ip address 10
set ip next-hop 192.168.100.1

route-map load-balance permit 20
match ip address 20
set ip next-hop 172.16.100.1
```

---

```

route-map load-balance permit 30
set interface Null0

```

<b>route-map</b>	
<b>match ip address</b>	
<b>set default interface</b>	
<b>set default interface</b>	
<b>set interface</b>	
<b>set ip default next-hop</b>	IP
<b>set ip precedence</b>	IP

### 32.1.42 set ip precedence

```

match IP ,
set ip precedence

```

---

**set ip precedence**  
IP

---

```

                                IP          TOS          IP
                                IP          TOS

                                fastEthernet 0/0
192.168.217.68          tos  4

access-list 1 permit 192.168.217.68 0.0.0.0
route-map name
match ip address 1
set ip tos 4
interface fa 0/0
ip policy route-map name

```

<b>match interface</b>	
<b>match ip address</b>	
<b>match ip next-hop</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric-type</b>	
<b>set tag</b>	
<b>set ip precedence</b>	IP

### 32.1.44 set level

```

match
set level          no

set level {level 1 | level 2 | level 1-2 | stub-area | backbone}
no set level

```

---

OSPF                      RIP                      backbone

```
router ospf
redistribute rip subnets route-map redrip
network 192.168.12.0 0.0.0.255 area 0
```

```
route-map redrip permit 10
set level backbone
```

<b>match interface</b>	
<b>match ip address</b>	
<b>match ip next-hop</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.45 set local-preference

match                      LOCAL\_PREFERENCE  
**set local-preference                      no**

**set local-preference** *number*

**no set local-preference**

--	--

---

<i>number</i>	0..4294967295
---------------	---------------

local-preference

local-preference

```
route-map SET_PREF permit 10
match as-path 1
set local-preference 6800
```

```
route-map SET_PREF permit 20
match as-path 2
set local-preference 50
```

<b>match as-path</b>	AS_PATH
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.46 set metric

```

match
metric          no
set metric      set
set metric [+ metric-value | - metric-value | metric-value]
no set metric
```

---

+	metric
-	metric
<i>metric-value</i>	

```

set metric + - metric
1-16      RIP      metric

OSPF      OSPF      RIP      RIP

```

---

<b>match ip address</b>	
<b>match ip next-hop</b>	
<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric-type</b>	
<b>set tag</b>	

### 32.1.47 set metric-type

match


**set metric-type**            **no**

**set metric-type** *type*

**no set metric-type**

<i>type</i>	

OSPF                            type-2

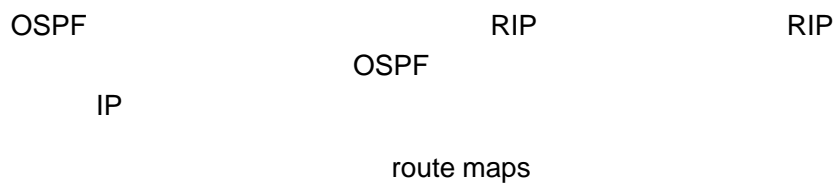

---

```

set match 1 match 1
set match 1 set

```

```

OSPF RIP
type-1

```

```

router ospf
redistribute rip subnets route-map redrip
network 192.168.12.0 0.0.0.255 area 0

```

```

route-map redrip permit 10
set metric-type type-1

```

match interface	
match ip address	
match ip next-hop	
match ip route-source	
match metric	
match route-type	
match tag	
set metric	
set tag	

### 32.1.48 set next-hop

```

match IP
set next-hop no

```

```

set next-hop ip-address
no set next-hop ip-address

```

---

<i>ip-address</i>	IP

---

<b>set tag</b>	
----------------	--

### 32.1.49 set origin

```

match
set origin no
set origin {egp | igp | incomplete}
no set origin

```

<b>egp</b>	EGP
<b>igp</b>	IGP
<b>Incomplete</b>	

```

route-map SET_ORIGIN 10 permit
match as-path 1
set origin igp
route-map SET_ORIGIN 20 permit
match as-path 2
set origin egp

```

<b>match as-path</b>	AS_PATH
<b>match metric</b>	
<b>match origin</b>	

<b>set as-path prepend</b>	AS_PATH
<b>set metric</b>	
<b>set local-preference</b>	

### 32.1.50 set originator-id

```

match
set originator-id          no
set originator-id ip-addr
no originator-id [ip-addr]

```

<i>ip-addr</i>	

```

route-map SET_ORIGIN 10 permit
match as-path 1
set originator-id 5.5.5.5
route-map SET_ORIGIN 20 permit
match as-path 2
set originator-id 5.5.5.6

```


<b>match as-path</b>	AS_PATH
<b>match metric</b>	
<b>match origin</b>	
<b>set as-path prepend</b>	AS_PATH

---

<b>set metric</b>	
<b>set local-preference</b>	

### 32.1.51 set tag

match **set tag**  
 no  
**set tag** *tag*  
**no set tag**

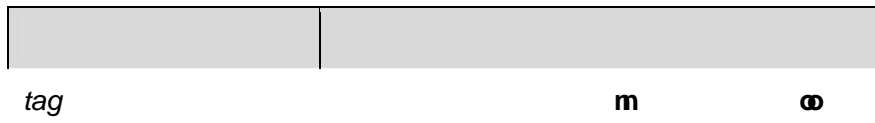

?rTbCb

---

<b>match ip route-source</b>	
<b>match metric</b>	
<b>match route-type</b>	
<b>match tag</b>	
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.52 set weight

```

match BGP
set weight no
set weight number
no set weight

```

<i>number</i>	0...65535

```

BGP
neighbor weight
32768
BGP
1.1.1.1 BGP in 100
router bgp 1

```

---

```

neighbor 1.1.1.1 route-map nei-rmap-in in
route-map nei-rmap-in permit 10
set weight 100

```

<b>match as-path</b>	AS_PATH
<b>match community</b>	
<b>match metric</b>	
<b>match origin</b>	
<b>set community</b>	COMMUNITY
<b>set metric</b>	
<b>set metric-type</b>	

### 32.1.53 ip ref ecmp load-balance source

ECMP/WCMP

HASH(KEY(SIP,[DIP] [TCP/UDP Port] [ UDF]))

Hash

HASH	2	CRC32_Upper
CRC32_Lower	KEY	
KEY	IP	(SIP)
TCP/UDP		IP(DIP)
KEY		

#### **ip ref ecmp load-balance**

```

{[crc32_lower | crc32_upper] [dip] [port]
[udf number]}

```

#### **no ip ref ecmp load-balance**

```

{[crc32_lower | crc32_upper] [dip] [port]
[udf number]}

```

---

```

          DIP  Port  UDF          Key
CRC32_Lower  CRC32_Upper          Hash
no
Key
          SIP + DIP + Port  no ip ref ecmp route dip port
Key                          SIP          no

```

```

          hash
Ruijie(config)# ip ref ecmp load-balance crc32_upper
          ip( ), ip,udp/tc 0,1

```

---

```
Ruijie# show route-map
route-map AAA, permit, sequence 10
Match clauses:
ip address 2
Set clauses:
metric 10
```

---

```
Community-list standard local
permit local-AS
Community-list standard Red-Giant
permit 0:10
deny 0:20
```

### 32.2.3 show ip prefix-list

**show ip prefix-list**

**show ip prefix-list** [ *prefix-name* ]

prefix-name	

```
Ruijie# show ip prefix-list
ip prefix-list pre: 2 entries
seq 5 permit 192.168.64.0/24
seq 10 permit 192.2.2.0/24
```

### 32.2.4 show ip route

IP **show ip route**

**show ip route** [[*vrf vrf\_name*] [*network [mask]* | **count** | **protocol** [*process-id*] | **weight** ]]

---

<b>vrf vrf_name</b>	VRF
<i>network</i>	
<i>mask</i>	
<b>count</b>	
<b>protocol</b>	<b>connected,</b> <b>static</b> <b>bgp, isis, ospf, rip</b>
<i>process-id</i>	
<b>weight</b>	

### show ip route

```

Ruijie# show ip route
Codes: C - connected, S - static, R - RIP, B - BGP
O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2
- IS-IS level-2
ia - IS-IS inter area, * - candidate default

Gateway of last resort is no set
S 20.0.0.0/8 is directly connected, VLAN 1
S 22.0.0.0/8 [1/0] via 20.0.0.1
O E2 30.0.0.0/8 [110/20] via 192.1.1.1, 00:00:06, VLAN
1

```

---

```
R 40.0.0.0/8 [120/20] via 192.1.1.2, 00:00:23, VLAN
1
B 50.0.0.0/8 [120/0] via 192.1.1.3, 00:00:41
C 192.1.1.0/24 is directly connected, VLAN 1
C 192.1.1.254/32 is local host.
```

**show ip route**



C

O

---

Routing Descriptor Blocks	IP

### show ip route count

```
Ruijie# show ip route count
----- route info -----
the num of active route: 5
```

### show ip route weight

```
Ruijie# show ip route weight
-----[distance/metric/weight]-----
S   23.0.0.0/8 [1/0/2] via 192.1.1.20
S   172.0.0.0/16 [1/0/4] via 192.0.0.1
```

## 32.2.5 show ipv6 prefix-list

IPv6 show ipv6  
prefix-list

show ipv6 prefix-list [ *prefix-name* ]

prefix-name	IPv6

IPv6

```
Ruijie# show ipv6 prefix-list
ipv6 prefix-list p6: 2 entries
permit 13::/20
permit 14::/20
```

---

## 32.2.6 show ip ref

REF

REF

```
Ruijie# show ip ref
```

---

# 33

## 33.1

### 33.1.1 ip policy route-map

**ip policy route-map**

**no**

**ip policy route-map** *route-map*

**no ip policy route-map**

<i>route-map</i>	

1

ACL                      ACL                      ACL

---

r

---

```

                                FE0
10.0.0.1                        196.168.4.6      20.0.0.1
                                196.168.5.6

access-list 1 permit 10.0.0.1
access-list 2 permit 20.0.0.1
route-map lab1 permit 10
match ip address 1
set ip next-hop 196.168.4.6
exit
route-map lab1 permit 20
match ip address 2
set ip next-hop 196.168.5.6
exit
interface FastEthernet 0/0
ip policy route-map lab1
exit
```

---

<b>load-balance redundance</b>	

**set ip next-hop**

4            ECMP            32            WCMP  
                  ARP

next-hop,

EF0

next-hop

```

access-list 1 permit 10.0.0.1
access-list 2 permit 20.0.0.1
route-map lab1 permit 10
match ip address 1
set ip next-hop 196.168.4.6
set ip next-hop 196.168.4.7
set ip next-hop 196.168.4.8
exit
route-map lab1 permit 20
match ip address 2
set ip next-hop 196.168.5.6
set ip next-hop 196.168.5.7
set ip next-hop 196.168.5.8
exit
interface FastEthernet 0/0
ip policy route-map lab1
exit
ip policy redundance

```

# 34 IPv6

## 34.1

### IPv6

- ping ipv6
- ipv6 address
- ipv6 enable
- ipv6 hop-limit
- ipv6 neighbor
- ipv6 source-route
- ipv6 route
- ipv6 ns-linklocal-src
- ipv6 nd ns-interval
- ipv6 nd reachable-time
- ipv6 nd prefix
- ipv6 nd ra-lifetime
- ipv6 nd ra-interval
- ipv6 nd ra-hoplimit
- ipv6 nd ra-mtu
- ipv6 nd managed-config-flag
- ipv6 nd other-config-flag
- ipv6 nd dad attempts
- ipv6 nd suppress-ra
- ipv6 redirects
- show ipv6 route
- show ipv6 neighbors
- show ipv6 interface
- clear ipv6 neighbors
- tunnel destination
- tunnel mode ipv6ip

- tunnel source
- tunnel ttl

### 34.1.1 ping ipv6

IPV6

**ping ipv6** [*ipv6-address*]

*ipv6-address*

ping

!	
.	
U	

Down

IPV6

(



r

no ipv6 enable            IPv6            IPv6  
    IPV6

Ruijie(config-if)# **ipv6 enable**



<i>interface-id</i>	Routed Port,L3 AP
SVI	
<i>hardware-address</i>	XXXX.XXXX.XXXX
48    MAC    'X'	

ARP

0

IPv6

0

IPv6

```
Ruijie(config)# no ipv6 source-route
```

### 34.1.7 ipv6 route

IPV6

no

```
ipv6 route ipv6-prefix/prefix-length {ipv6-address | interface-id  
[ipv6-address]}
```

```
no ipv6 route ipv6-prefix/prefix-length {ipv6-address | interface-id  
[ipv6-address]}
```

*ipv6-prefix* IPV6

RFC2373

*prefix-length* IPV6

'/

*ipv6-address*

RFC2373

*interface-id*

,

```
Ruijie(config)# ipv6 route 2001::/64 vlan 1 2005::1
```

show ipv6 route	IPv6

### 34.1.8 ipv6 ns-linklocal-src

```
no ipv6 ns-linklocal-src
```

```
ipv6 ns-linklocal-src
```

```
no ipv6 ns-linklocal-src
```

```
Ruijie(config)# no ipv6 ns-linklocal-src
```

### 34.1.9 ipv6 nd ns-interval

```
(NS)
```

```
no
```

```
ipv6 nd ns-interval milliseconds
```

```
no ipv6 nd ns-interval
```

```
milliseconds  
1000-429467295
```

```
(RA)
```

```
0( )  
1000ms(1 )
```

(RA)

```
Ruijie(config-if)# ipv6 nd ns-interval 2000
```

show ipv6 interface	

### 34.1.10 ipv6 nd reachable-time

NDP

no

```
ipv6 nd reachable-time milliseconds
```

```
no ipv6 nd reachable-time
```

*milliseconds*

0-3600000

```
(RA) 0( )
30000ms(30 )
```

(RA)

0

RFC4861

0.5 1.5

```
Ruijie(config-if)# ipv6 nd reachable-time 1000000
```

<b>show ipv6 interface</b>	

### 34.1.11 ipv6 nd prefix

(RA)

no

**ipv6 nd prefix** *ipv6-prefix/prefix-length* | **default** [ [

address (RA) ipv6

**ipv6 nd prefix default**

ipv6 nd prefix default

ipv6 nd prefix default

*at valid-date preferred-date*

2

0

**SVI 1**

```
Ruijie(config)#interface vlan 1
Ruijie(config-if)# ipv6 nd prefix 2001::/64 infinite
2592000
```

SVI 1 ( )

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# ipv6 nd prefix default no-autoconfig
```

show ipv6 interface	ra-info

**34.1.12 ipv6 nd ra-lifetime**

(RA)

no

**ipv6 nd ra-lifetime seconds**

**no ipv6 nd ra-lifetime**

seconds 0-9000s.

1800

“ ” (RA)

0 0  
(RA) (ra-interval)

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# ipv6 nd ra-lifetime 2000
```

<b>show ipv6 interface</b>	ra-info
<b>ipv6 nd ra-interval</b>	
<b>ipv6 nd ra-hoplimit</b>	
<b>ipv6 nd ra-mtu</b>	MTU

### 34.1.13 ipv6 nd ra-interval

(RA)

no

**ipv6 nd ra-interval** {seconds | **min-max** *min\_value max\_value*}

**no ipv6 nd ra-interval**

seconds (RA) ,3-1800s

**min-max**

*min\_value*

*max\_value*

200

200

20

**min-max**

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# ipv6 nd ra-interval 110
Ruijie(config-if)# ipv6 nd ra-interval min-max 110 120
```

<b>show ipv6 interface</b>	<b>ra-info</b>
<b>ipv6 nd ra-lifetime</b>	
<b>ipv6 nd ra-hoplimit</b>	
<b>ipv6 nd ra-mtu</b>	MTU

**34.1.14 ipv6 nd ra-hoplimit**

(RA)

no

**ipv6 nd ra-hoplimit** *value***no ipv6 nd ra-hoplimit***value* (RA)

64

```
Ruijie(config)# interface vlan 1  
Ruijie(config-if)# ipv6 nd ra-hoplimit 110
```



**show ipv6 interface**

**ra-info**

<b>ipv6 nd ra-lifetime</b>	
<b>ipv6 nd ra-interval</b>	
<b>ipv6 nd ra-hoplimit</b>	

### 34.1.16 ipv6 nd managed-config-flag

```

configuration"                                "managed address
no                                             no
ipv6 nd managed-config-flag
no ipv6 managed-config-flag

```

```

Ruijie(config)# int vlan 1
Ruijie(config)# ipv6 nd managed-config-flag

```

<b>show ipv6 interface</b>	ra-info
<b>ipv6 nd other-config-flag</b>	

### 34.1.17 ipv6 nd dad attempts

```

(NS) IPv6 no
ipv6 nd dad attempts value
no ipv6 nd dad attempts

```

```
value (NS) 0
      ipv6 0-600
```

1

IPV6

"tentative"( )

EUI-64

( IPV6 )

down/up

down up

```
Ruijie(config)# interface vlan 1
Ruijie(config-if)# ipv6 nd dad attempts 3
```

show ipv6 interface	

### 34.1.18 ipv6 nd suppress-ra

```
(RA) no
(RA)
```

**ipv6 nd suppress-ra**

**no ipv6 nd suppress-ra**

IPv6

ipv6 suppress-ra

```
Ruijie(config)# interface vlan 1  
Ruijie(config-if)# ipv6 nd suppress-ra
```

show ipv6 interface	ra-info

### 34.1.19 ipv6 redirects

```
no          IPV6          ICMPv6  
           ICMPv6
```

RDP

```
Ruijie(config-if)# tunnel source vlan 1
```

<b>tunnel source</b>	
<b>tunnel destination</b>	
<b>tunnel ttl</b>	TTL

### 34.1.22 tunnel destination

```
, no
```

```
tunnel destination ipv4-address
```

```
no tunnel destination
```

```
ipv4-address , IPv4
```

---

```
r
(6to4 isatap)
```

---

```
IPv6 :
```

```
Ruijie(config)# interface tunnel 1
Ruijie(config-if)# tunnel mode ipv6ip
Ruijie(config-if)# tunnel source vlan 1
Ruijie(config-if)# tunnel destination 192.168.5.1
```

<b>tunnel source</b>	
<b>tunnel mode</b>	
<b>tunnel ttl</b>	TTL

### 34.1.23 tunnel source

, no

**tunnel source** {*ipv4-address* | *interface-type interface-number*}

**no tunnel source**

*ipv4-address* IPv4 IPv4

*interface-type interface-number*  
IPv4 IPv4

IPv4 , IPv4  
( 6to4 isatap)

---

r

---

IPv6

```
Ruijie(config)# interface tunnel 1
Ruijie(config-if)# tunnel mode ipv6ip
```



## 34.2.1 show ipv6 route

IPV6

**show ipv6 route [static] [local] [connected]**

**static**

**local**

**connected**

```
Ruijie# show ipv6 route
Codes: C - Connected, L - Local, S - Static, R - RIP,
B - BGP
       I1 - ISIS L1, I2 - ISIS L2, IA - IIS interarea
L   ::1/128
    via ::1, loopback 0
C   fa::/64
    via ::, vlan 1
L   fa::1/128
    via ::, loopback 0
C   2001::/64
    via ::, vlan 2
L   2001::1/128
    via ::, loopback 0
L   fe80::/10
    via ::1, Null0
C   fe80::/64
    via ::, vlan 1
L   fe80::200:ff:fe00:1/128
    via ::, loopback 0
C   fe80::/64
    via ::, vlan 2
```



ipv6 route	
------------	--

## 34.2.2 show ipv6 neighbors

IPV6

**show ipv6 neighbors** [**verbose**] [*interface-id*] [*ipv6-address*]

**verbose**

*interface-id*

*ipv6-address*



ra-info

RA

IPV6

ND

```

Ruijie# show ipv6 interface vlan 1
Interface vlan 1 is Up, ifindex: 2001
address(es):
Mac Address: 00:00:00:00:00:01
INET6: fe80::200:ff:fe00:1 , subnet is fe80::/64
INET6: 2001::1 , subnet is 2001::/64 [TENTATIVE]
Joined group address(es):
ff01:1::1
ff02:1::1
ff02:1::2
ff02:1::1:ff00:1
MTU is 1500 bytes
ICMP error messages limited to one every 10 milliseconds
ICMP redirects are enabled
ND DAD is enabled, number of DAD attempts: 1
ND reachable time is 30000 milliseconds
ND advertised reachable time is 0 milliseconds
ND retransmit interval is 1000 milliseconds
ND advertised retransmit interval is 0 milliseconds
ND router advertisements are sent every 200
seconds<240--160>
ND router advertisements live for 1800 seconds

```

```

                                INET6: 2001::1 , subnet is 2001::/64
[TENTATIVE]                    INET6      []

```

ANYCAST	
TENTATIVE	(DAD),
DUPLICATED	
DEPRECATED	
NODAD	



!M

!M | M

# 35 OSPFv3

## 35.1

### 35.1.1 area default-cost

stub NSSA ABR stub  
 NSSA no

**area** *area-id* **default-cost** *cost*

**no** **area** *area-id* **default-cost**

<i>area-id</i>	stub NSSA IPv4
<i>cost</i>	stub NSSA 1-16777214

**default-cost** 1



**no**

stub

Stub  
Stub

**no**

**area** *area-id* **virtual-link** *router-id*

- stub NSSA
- hello-interval dead-interval
- instance
- no area *area-id* ( )

```

ipv6 router ospf 1
area 1 virtual-link 192.1.1.1
    
```

show ipv6 ospf	OSPFv3
show ipv6 ospf neighbor	OSPFv3
show ipv6 ospf virtual-links	OSPFv3

### 35.1.5 auto-cost

OSPF

no

auto-cost [

**ipv6 ospf cost**

10M

```

ipv6 router ospf 1
auto-cost reference-bandwidth 5

```

<b>ipv6 ospf cost</b>	
<b>show ipv6 ospf</b>	OSPFv3

**35.1.6 clear ipv6 ospf process**

OSPF

```

clear ipv6 ospf {process | process-id}

```

<i>process-id</i>	ospf <1-65535>

F

**no default-information originate** [**always**] [**metric** *metric*]  
 [**metric-type** *type*] [**route-map** *map-name*]

<b>always</b>	OSPF
<b>metric</b> <i>metric</i>	1
<b>metric-type</b> <i>type</i>	OSPF 1 2 1 2
<b>route-map</b> <i>map-name</i>	route-map , route-map

OSPFv3

**redistribute** ASBR **default-information** OSPF

**redistribute** ASBR **OSPF**  
**default-information originate**

**always** OSPF

**show ipv6 ospf database** OSPF  
 0.0.0.0 OSPF

**show ipv6 route**

**default-information originate**  
**default-metric**

OSPF 1 2

1 1 2 **show ipv6 route**

1

STUB

default-information originate always

<b>redistribute</b>	
<b>show ipv6 ospf</b>	OSPFv3
<b>show ipv6 ospf database</b>	OSPFv3

### 35.1.8 default-metric

**no**

**default-metric** *metric-value*

**no default-metric**

<i>metric-value</i>	1-16777214 20

20

OSPFv3

**redistribute**

1. **default-information originate**

2. 20

metric 10

default-metric 10

<b>redistribute</b>	
<b>show ipv6 ospf</b>	OSPFv3

### 35.1.9 ipv6 ospf area

OSPFv3

**no**

**ipv6 ospf** *process-id* **area** *area-id* [**instance** *instance-id*]

**no ipv6 ospf** *process-id* **area** [**instance** *instance-id*]

<i>process-id</i>	ospf
<b>area</b> <i>area-id</i>	OSPFv3 IPv6
<b>instance</b> <i>instance-id</i>	OSPFv3

OSPFv3

**ipv6**

```

router ospf      OSPFv3      OSPFv3
    no ipv6 ospf area      OSPFv3
    no ipv6 router ospf    OSPFv3
        instance-id
                                OSPFv3
  
```

```

                                int fastethernet 0/0      OSPFv3
  
```

```

int fastethernet 0/0
ipv6 ospf 1 area 2 instance 2
  
```

<b>ipv6 ospf prefix-filter</b>	
<b>ipv6 router ospf</b>	OSPFv3

### 35.1.11 ipv6 ospf dead-interval

```

hello                                no
ipv6 ospf dead-interval seconds [instance instance-id]
no ipv6 ospf dead-interval [instance instance-id]

```

<i>seconds</i>	1-65535( )
<b>instance</b> <i>instance-id</i>	OSPFv3

```
ip ospf hello-interval 4
```

```
hello 4 hello
```

1. hello
- 2.

60s

```
ipv6 ospf dead-interval 60
```

<b>ipv6 ospf hello-interval</b>	Hello
<b>show ipv6 ospf interface</b>	OSPFv3
<b>instance</b> <i>instance-id</i>	OSPFv3

### 35.1.12 ipv6 ospf hello-interval

Hello

no

```
ipv6 ospf hello-interval seconds [instance instance-id]
```

```
no ipv6 ospf hello-interval [instance instance-id]
```

<i>seconds</i>	Hello 1-65535( )
<b>instance</b> <i>instance-id</i>	OSPFv3

10

Hello

hello

20s

```
ipv6 ospf hello-interval 20
```

<b>ipv6 ospf dead-interval</b>	
<b>show ipv6 ospf interface</b>	OSPFv3
<b>instance</b> <i>instance-id</i>	OSPFv3

### 35.1.13 ipv6 ospf neighbor

OSPFv3

no

```
ipv6 ospf neighbor ipv6-address [[cost <1-65535>] [poll-interval  
<0-4294967295> | priority <0-255>]] [instance instance-id]
```

```
no ipv6 ospf neighbor ipv6-address [[cost <1-65535>] [poll-interval  
<0-4294967295> | priority <0-255>]] [instance instance-id]
```

<b>cost</b> <1-65535>	point-to-multipoint cost
<b>poll-interval</b> <0-4294967295>	120 Non-broadcast(NBMA)
<b>priority</b> <0-255>	Non-broadcast(NBMA)
<b>instance</b> <i>instance-id</i>	OSPFv3

e

## OSPFv3

```
ipv6 ospf network point-to-point
```

<b>ipv6 ospf priority</b>	

```
show ipv6 ospf interface
```

OSPFv3

```

DR/BDR( / )
DR/BDR DR BDR
Router-ID DR BDR
DR/BDR
DR BDR
DR BDR
DR/BDR DR BDR
ipv6 ospf priority 0
    
```

<b>ipv6 ospf network</b>	
<b>router-id</b>	
<b>show ipv6 ospf interface</b>	OSPFv3
<b>instance <i>instance-id</i></b>	OSPFv3

### 35.1.16 ipv6 ospf retransmit-interval

LSA **no**

```

ipv6 ospf retransmit-interval seconds [instance instance-id]
no ipv6 ospf retransmit-interval [instance instance-id]
    
```

<i>seconds</i>	LSA 1-65535( )
<b>instance <i>instance-id</i></b>	OSPFv3

LSA

LSA

LSA

10s

`ipv6 ospf retransmit-interval 10`

<b>show ipv6 ospf interface</b>	OSPFv3
<b>instance</b> <i>instance-id</i>	OSPFv3

### 35.1.17 ipv6 ospf transmit-delay

LSA

**no**

`ipv6 ospf transmit-delay seconds [instance instance-id]`

`no ipv6 ospf transmit-delay [instance instance-id]`

<i>seconds</i>	LSA 1-65535( )
<b>instance</b> <i>instance-id</i>	OSPFv3 0-255.

1

LSA

LSA

`ipv6 ospf transmit-delay 2`

<b>show ipv6 ospf interface</b>	OSPFv3

### 35.1.18 ipv6 router ospf

OSPFv3

**no**

OSPFv3

**ipv6 router ospf** *process-id*  
**no ipv6 router ospf** *process-id*

<i>process-id</i>	OSPF

C&AtildeE/O&Egrave S\*AQ,X      **ipv6 router ospf**

**no log-adj-changes [detail]**

<b>detail</b>	

FULL

```
Ruijie(config)# router ospf 1
Ruijie(config-router)# log-adj-changes detail
```

<b>show ipv6 ospf</b>	ospf

### 35.1.20 max-concurrent-dd

DD

**max-concurrent-dd** *number*  
**no max-concurrent-dd**

<i>number</i>	1-65535

max-concurrent-dd

## **35.1.22 redistribute**

```

OSPF                                match                                OSPF
                                OSPF
                                route-map match
                                tag metric metric-type
route-map                          set
                                route-map test match
metric 20 set metric 30
redistribute connect metric 10 route-map test
                                metric 20 metric
30
    
```

<b>default-information originate</b>	
<b>default-metric</b>	
<b>summary-prefix</b>	
<b>show ipv6 ospf</b>	OSPFv3
<b>show ipv6 ospf database</b>	OSPFv3

### 35.1.23 router-id

```

                                (Router ID) no
Router ID Router ID
router-id router-id
no router-id
    
```

--	--

```

ID      OSPFv3      Router ID      Router
        IPv4
        OSPFv2  OSPFv2      IPv4      Router ID
          OSPFv3      Router-id      OSPFv3
          Router ID      OSPFv3
                    Router ID
                    OSPFv3      OSPFv3
          Router ID      OSPFv3
          Router ID      Router ID  OSPFv3
          OSPF
                    Router ID      OSPFv3
          Router ID
                    OSPFv3      1.1.1.1
router-id 1.1.1.1
    
```

<b>ipv6 ospf priority</b>	
<b>show ipv6 ospf</b>	OSPFv3

### 35.1.24 timers spf

```

        OSPFv3      SPF
        SPF      timers spf
        no
timers spf delay holdtime
no timers spf
    
```

<i>delay</i>	SPF 0-214748364 ( ) 5
<i>holdtime</i>	SPF 0-214748364 ( ) 10

```
spf-delay 5
spf-holdtime 10
```

OSPFv3

```
spf-delay spf-holdtime OSPF
```

```
timers spf 2 4
```

<b>clear ipv6 ospf</b>	OSPFv3
<b>show ipv6 ospf</b>	OSPFv3

## 35.2

### 35.2.1 show ipv6 ospf

OSPFv3

```
show ipv6 ospf [process-id]
```

<i>process- id</i>	ospf , 1-65535.

OSPFv3

```
Ruijie# show ipv6 ospf
Routing Process "OSPFv3 (1)" with ID 1.1.1.1
Process uptime is 24 minutes
SPF schedule delay 5 secs, Hold time between SPFs 10 secs
```

```
Minimum LSA interval 5 secs, Minimum LSA arrival 1 secs
Number of incoming current DD exchange neighbors 0/5
Number of outgoing current DD exchange neighbors 0/5
Number of external LSA 0. Checksum Sum 0x0000
Number of AS-Scoped Unknown LSA 0
Number of LSA originated 11
Number of LSA received 4
Log Neighbor Adjency Changes : Enabled
Number of areas in this router is 2
Area BACKBONE(0)
Number of interfaces in this area is 1(1)
SPF algorithm executed 4 times
Number of LSA 3. Checksum Sum 0x1DDF1
Number of Unknown LSA 0
```

```
OSPFv3 BFD , "BFD is enabled",
```

```
Ruijie# show ipv6 ospf
Routing Process "OSPFv3 (1)" with ID 1.1.1.1
Process uptime is 24 minutes
SPF schedule delay 5 secs, Hold time between SPFs 10 secs
Minimum LSA interval 5 secs, Minimum LSA arrival 1 secs
Number of incoming current DD exchange neighbors 0/5
Number of outgoing current DD exchange neighbors 0/5
Number of external LSA 0. Checksum Sum 0x0000
Number of AS-Scoped Unknown LSA 0
Number of LSA originated 11
Number of LSA received 4
Log Neighbor Adjency Changes : Enabled
Number of areas in this router is 2
BFD is enabled
Area BACKBONE(0)
Number of interfaces in this area is 1(1)
SPF algorithm executed 4 times
Number of LSA 3. Checksum Sum 0
```

<b>default-metric</b>	
<i>router-id</i>	OSPFv3
<b>timers spf</b>	OSPFv3 SPF SPF

### 35.2.2 show ipv6 ospf database

OSPFv3

**show ipv6 ospf** [*process- id*] **database** [*lsa-type* [*adv-router* *router-id* ]]

<i>process- id</i>	OSPF , 1-65535.
<i>lsa-type</i>	lsa external link inter-prefix inter-router intra-prefix network router te lsa
<b>adv-router</b> <i>router-id</i>	router LSA

OSPFv3

Ruijie# **show ipv6 ospf database**

OSPFv3 Router with ID (1.1.1.1) (Process 1)

Link-LSA (Interface FastEthernet 1/0)

Link State ID	ADV Router	Age	Seq#	CkSum
Prefix				
0.0.0.2	1.1.1.1	197	0x80000001	0x7cd8
0				

0.0.0.5	2.2.2.2	206	0x80000001	0x8c86
0				

Link-LSA (Interface Loopback 1)

Link State ID	ADV Router	Age	Seq#	CkSum
Prefix				
0.0.64.1	1.1.1.1	82	0x80000001	0xb760
0				

```

Router-LSA (Area 0.0.0.0)
Link State ID  ADV Router      Age  Seq#      CkSum
Link
0.0.0.0        1.1.1.1      17  0x80000006 0x62a1    1
0.0.0.0        2.2.2.2      156 0x80000003 0x8653
1
    
```

```

Network-LSA (Area 0.0.0.0)
Link State ID  ADV Router      Age  Seq#      CkSum
0.0.0.5        2.2.2.2      157 0x80000001 0xf8f6
    
```

```

Router-LSA (Area 0.0.0.1)
Link State ID  ADV Router      Age  Seq#      CkSum
Link
0.0.0.0        1.1.1.1      17  0x80000002 0x0529
0
    
```

```

Inter-Area-Prefix-LSA (Area 0.0.0.1)

Link State ID  ADV Router      Age  Seq#      CkSum
0.0.0.1        1.1.1.1      77  0x80000002 0x83b4
    
```

AS-external-LSA

```

Link State ID  ADV Router      Age  Seq#      CkSum
0.0.0.1        1.1.1.1      1  0x80000001 0x6035 E2
    
```



**ipv6 router ospf**

**OSPFv3**

```
Ruijie# show ipv6 ospf interface
FastEthernet 1/0 is up, line protocol is up
Interface ID 2
IPv6 Prefixes
fe80::2d0:22ff:fe22:2223/64 (Link-Local Address)
OSPFv3 Process (1), Area 0.0.0.0, Instance ID 0
Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State BDR, Priority 1
Designated Router (ID) 2.2.2.2
Interface Address fe80::c800:eff:fe84:1c
Backup Designated Router (ID) 1.1.1.1
Interface Address fe80::2d0:22ff:fe22:2223
Timer interval configured, Hello 10, Dead 40, Wait 40,
Retransmit 5
Hello due in 00:00:02
Neighbor Count is 1, Adjacent neighbor count is 1
Hello received 26 sent 26, DD received 5 sent 4
LS-Req received 1 sent 1, LS-Upd received 3 sent 6
LS-Ack received 6 sent 2, Discarded 0

                                BFD                                BFD
enabled
```

```
Ruijie# show ipv6 ospf interface
FastEthernet 1/0 is up, line protocol is up
Interface ID 2
IPv6 Prefixes
fe80::2d0:22ff:fe22:2223/64 (Link-Local Address)
OSPFv3 Process (1), Area 0.0.0.0, Instance ID 0
Router ID 1.1.1.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State BDR, Priority 1 BFD enabled
Designated Router (ID) 2.2.2.2
Interface Address fe80::c800:eff:fe84:1c
Backup Designated Router (ID) 1.1.1.1
Interface Address fe80::2d0:22ff:fe22:2223
Timer interval configured,Hello 10,Dead 40,Wait
40,Retransmit 5
Hello due in 00:00:02
Neighbor Count is 1, Adjacent neighbor count is 1
Hello received 26 sent 26, DD received 5 sent 4
LS-Req received 1 sent 1, LS-Upd received 3 sent 6
LS-Ack received 6 sent 2, Discarded 0
```

<b>ipv6 router ospf</b>	OSPFv3
<b>ipv6 ospf area</b>	OSPFv3

### 35.2.4 show ipv6 ospf neighbor

OSPFv3

**show ipv6 ospf** [*process- id*] **neighbor** [*interface-type*  
*interface-number* [**detail**]] [*neighbor-id*] [**detail**]

<i>process- id</i>	OSPFv3 , 1-65535.
<i>detail</i>	

.92 in 1-24-1501 536.84 0.c2 0.48001 1-(inter)j/TT8db116e197909b7324f0d5 0 TD0 Tc<43

```
Database Summary List 0
Link State Request List 0
Link State Retransmission List 0
```

BFD

**BFD session state up**

```
Ruijie# show ipv6 ospf neighbor detail
```

```
Neighbor      2.2.2.2,      interface      address
fe80::c800:eff:fe84:1c
```

```
In the area 0.0.0.0 via interface FastEthernet 1/0
Neighbor priority is 1, State is Full, 6 state changes
DR is 2.2.2.2 BDR is 1.1.1.1
Options is 0x000013 (-|R|-|-|E|V6)
Dead timer due in 00:00:36
Database Summary List 0
Link State Request List 0
Link State Retransmission List 0
```

**BFD session state up**

<b>ipv6 router ospf</b>	OSPFv3
<b>ipv6 ospf area</b>	OSPFv3
<b>area virtual-link</b>	OSPFv3
<b>show ipv6 ospf interface</b>	OSPFv3

### 35.2.5 show ipv6 ospf route

OSPFv3

```
show ipv6 ospf [process-id] route[count]
```

<i>process-id</i>	OSPFv3 , 1-65535.
<i>count</i>	OSPFv3

## OSPF

```

Ruijie# show ipv6 ospf route
OSPFv3 Process (1)
Codes: C - connected, D - Discard, O - OSPF, IA - OSPF
inter area, E1 - OSPF external type 1, E2 - OSPF external
type 2
Destination                                Metric
Next-hop
E2 2222::/64                                1/20
via fe80::c800:eff:fe84:1c, FastEthernet 1/0
O 3333::/64                                  11
via fe80::c800:eff:fe84:1c, FastEthernet 1/0, Area
0.0.0.0

```

ipv6 router ospf	OSPFv3

## 35.2.6 show ipv6 ospf topology

## OSPFv3

```
show ipv6 ospf [process- id] topology [area area-id]
```

<i>process- id</i>	OSPFv3 , 1-65535.
<i>area-id</i>	

## OSPFv3

```

Ruijie# show ipv6 ospf topology
OSPFv3 Process (1)
OSPFv3 paths to Area (0.0.0.0) routers
Router ID      Bits  Metric  Next-Hop
Interface
1.1.1.1        EB   --

```

```
2.2.2.2          E  1          2.2.2.2
FastEthernet 1/0
```

```
OSPFv3 paths to Area (0.0.0.1) routers
Router ID      Bits Metric  Next-Hop
Interface
1.1.1.1       B   --
```

<b>ipv6 router ospf</b>	OSPFv3
<b>area range</b>	OSPF

### 35.2.7 show ipv6 ospf virtual-links

OSPFv3

**show ipv6 ospf [*process- id*] virtual-links**

<i>process- id</i>	OSPFv3 , 1-65535.

\$

OSPFv3

---



**area virtual-link**

OSPFv3

OSPFv3

## 36 IGMP

### 36.1 IGMP

- clear ip igmp group
- clear ip igmp interface
- ip igmp access-group
- ip igmp join-group
- ip igmp static-group
- ip igmp immediate-leave group-list
- ip igmp last-member-query-count
- ip igmp last-member-query-interval
- ip igmp limit ( )
- ip igmp query-interval
- ip igmp query-max-response-time
- ip igmp querier-timeout
- ip igmp robustness-variable
- ip igmp version
- ip igmp limit ( )
- ip igmp prn6 Tw[(ip ig)5.7(mp prn6 Tw[(ip ig)5.7(mp prn6 Tw[(ip ig)5.7(mp prn6 T
-

**clear ip igmp group**[*group-address* | *interface-type interface-number*]

<i>group-address</i>	32	IP	D	8
<i>interface-type</i>				
<i>interface-number</i>				

IGMP

IGMP

**clear ip igmp group**

Ruijie# **clear ip igmp group**

**show ip igmp groups**

**show ip igmp interface**

### 36.1.2 clear ip igmp interface

IGMP

**clear ip igmp interface** *ifname*

<i>ifname</i>	

IGMP

ifname

```
Ruijie# clear ip igmp interface eth1
```

### 36.1.3 ip igmp access-group

no

```
ip igmp access-group access-list
```

```
no ip igmp access-group
```

<i>access-list</i>	, <1-199>  <1300-2699>   WORD

#### ip igmp access-group

Eth0

225.2.2.2.

```
Ruijie# configure terminal
```

```
Ruijie(config)# access-list 1 permit 225.2.2.2 0.0.0.0
```

```
Ruijie(config)# interface ethernet 0
```

```
Ruijie(config-if)# ip igmp access-group 1
```

### 36.1.4 ip igmp join-group

no

**ip igmp join-group** *group-address*

**no ip igmp join-group** *group-address*

<i>group-address</i>	

Eth0      233.3.3.3 .

Ruijie# **configure terminal**

Ruijie(config)# **interface ethernet 0**

Ruijie(config-if)# **ip igmp join-group 233.3.3.3**

Ruijie(config-if)# **exit**

### 36.1.5 ip igmp static-group

no

**ip igmp static-group** *group-address*

**no ip igmp static-group** *group-address*

--	--

<i>group-address</i>	
----------------------	--

Eth0      236.6.6.6

```
Ruijie# configure terminal
Ruijie(config)# interface ethernet 0
Ruijie(config-if)# ip igmp static-group 236.6.6.6
Ruijie(config-if)# exit
```

### 36.1.6 ip igmp immediate-leave group-list

IGMPversion2    IGMPversion3

no

**ip igmp immediate-leave group-list *access-list***

**no ip igmp immediate-leave group-list**

<i>access-list</i>	

IGMP

2s

IGMP

IGMP

```
Ruijie# configure terminal
Ruijie(config)# access-list 1 permit 225.192.20.0
0.0.0.255
Ruijie(config)# interface ethernet 0/1
Ruijie(config-if)# ip igmp immediate-leave group-list
1
Ruijie(config-if)# exit
```

**ip igmp last-member-query-interval**

### 36.1.7 ip igmp last-member-query-count

```
last-member-query-count leave
last-member-query-count
no
```

**ip igmp last-member-query-count** *number*

**no ip igmp last-member-query-count**

<i>number</i>	, <2-7>

**last member query count** 2

IGMPv2

ip igmp

**last-member-query-count**

3.

```
Ruijie# configure terminal
Ruijie(config)# interface ethernet 0
Ruijie(config-if)# ip igmp last-member-query-count 3
```

### 36.1.8 ip igmp last-member-query-interval

**ip igmp immediate-leave**

### **36.1.9 ip igmp limit (            )**

igmp states

no

**ip igmp limit** *number* [**except** *access-list*]

**no ip igmp limit**



*number*

IGMP

**ip igmp query-interval** *seconds*

**no ip igmp query-interval**

<i>seconds</i>	s 1 18000

125

Ethernet 0

120s

Ruijie(config-if)# **ip igmp query-interval 120**

Ethernet 0

Ruijie(config-if)# **no ip igmp query-interval**

### 36.1.11 ip igmp query-max-response-time

no

**ip igmp query-max-response-time** *seconds*

**no ip igmp query-max-response-time**

<i>seconds</i>	s 1 25

10s

IGMP

S

!

—

Ethernet 0

```
Ruijie(config-if)# no ip igmp query-timeout
```

### 36.1.13 ip igmp robustness-variable

no

**ip igmp robustness-variable** *number*

**no ip igmp robustness-variable**

{1   2   3}	<1-3>
-------------	-------

2.

igmp

igmp

2

```
Ruijie# configure terminal
Ruijie(config)# interface ethernet 0
Ruijie(config-if)# ip igmp version 2
```

### 36.1.15 ip igmp limit ( )

igmp

no

**ip igmp limit** *number* [**except** *access-list*]

**no ip igmp limit** *number* [**except** *access-list*]

<i>number</i>	IGMP
<b>except</b>	<i>access-list</i> limit
<i>access-list</i>	

65536

IGMP  
IGMP

300

Ruijie config # ip igmp limit 300

### 36.1.16 ip igmp proxy-service

mroute-proxy  
mroute-proxy

**ip igmp proxy-service**

**no ip igmp proxy-service**

proxy-service

proxy-service 255 32  
 proxy-service  
 proxy-service mroute-proxy  
 proxy-service  
 switchport ip igmp  
**mroute-proxy interface**

proxy-service

Ruijie(config-if)# ip igmp proxy-service

### 36.1.17 ip igmp mroute-proxy

IGMP

### 36.1.19 ip igmp ssm-map static

ssm-map

**ip igmp ssm-map static** *access-list a.b.c.d*

**no ip igmp ssm-map static** *access-list a.b.c.d*

<i>access-list</i>	Acl	<1-99>  <1300-1999>  WORD	
<i>a.b.c.d</i>			

**ip igmp ssm-map enable**

v3

ACL 11 192.168.2.2,

Ruijie(config)# **ip igmp ssm-map static 11 192.168.2.2.**

### 36.1.20 show ip igmp groups

IGMP

**show ip igmp groups** [*group-address* | *interface-type*

*interface-number*] [**detail**]

<i>group-address</i>	32	IP	D	8
<i>interface-type</i>				

<i>interface-number</i>	
-------------------------	--

**detail**

**show ip igmp interface** [*interface-type interface-number*]

<i>interface-type</i>	
<i>interface-number</i>	

```
Ruijie# show ip igmp interface
Interface vlan 1(Index 4294967295)
IGMP Active, Non-Querier, Version 3 (default)
IGMP querying router is 0.0.0.0
IGMP query interval is 125 seconds
IGMP querier timeout is 255 seconds
IGMP max query response time is 10 seconds
Last member query response interval is 1000 milliseconds
Group Membership interval is 260 seconds
IGMP Snooping is globally enabled
IGMP Snooping is enabled on this interface
IGMP Snooping fast-leave is not enabled
IGMP Snooping querier is not enabled
IGMP Snooping report suppression is enabled
```

### 36.1.22 show ip igmp ssm-mapping

IGMP      ssm-map

**show ip igmp ssm-mapping** [ *A.B.C.D* ]

<i>A.B.C.D</i>	

## IGMP ssm-map

### ssm-map

```
Ruijie# sh ip igmp ssm-mapping
SSM Mapping : Enabled
Database    : Static mappings configured
```

### 233.3.3.3

```
Ruijie#show ip igmp ssm-mapping 233.3.3.3
Group address: 233.3.3.3
Database      : Static
Source list   : 192.3.3.3
               : 3.3.3.3
```

# 37 PIM-DM

## 37.1 PIM-DM

PIM-DM

- **ip pim dense-mode**
- **ip pim neighbor-filter**
- **ip pim query-interval**
- **ip pim state-refresh disable**
- **ip pim state-refresh origination-interval**
- **show ip pim dense-mode interface**
- **show ip pim dense-mode neighbor**
- **show ip pim dense-mode nexthop**
- **show ip pim dense-mode mroute**

### 37.1.1 ip pim dense-mode

```
no PIM-DM ip pim dense-mode
no PIM-DM PIM-DM

ip pim dense-mode
no ip pim dense-mode
```

PIM-DM

```
Ruijie# configure terminal
Ruijie(config)# interface fastethernet 0/1
Ruijie(config-if)# ip pim dense-mode
```



PIM-DM  
 PIM-DM  
 PIM-DM      IGMP

Failed to enable PIM-DM on < >, resource temporarily unavailable, please try again

PIM-DM Configure failed! VIF limit exceeded in NSM!!!

PIM-DM  
 PIM-DM   PIM-SM   DVMRP  
 v4

### 37.1.2 ip pim neighbor-filter

**ip pim neighbor-filter**  
 PIM-DM

Peering

no

**ip pim neighbor-filter** *access-list*

**no ip pim neighbor-filter** *access-list*

<i>access-list</i>	



### 37.1.4 ip pim state-refresh disable

	PIM-DM		<b>ip pim</b>
<b>state-refresh disable</b>		no	PIM-DM

**ip pim state-refresh origination-interval** *interval-seconds*

**no ip pim state-refresh origination-interval**

<i>interval-seconds</i>	<1-100>

60

Ruijie# **configure ie#**

50.50.50.50    VLAN 4                            2            v2/D            1



Neighbor-Address	
Interface	
Uptime/Expires	
Ver	PIM

### 37.1.8 show ip pim dense-mode nexthop

PIM-DM

**show ip pim dense-mode nexthop**

**show ip pim dense-mode nexthop**

/ /

PIM-DM

Ruijie# **show ip pim dense-mode nexthop**

```

Destination  Nexthop  Nexthop  Nexthop  Metric  Pref
              Num    Addr    Interface
1.1.1.111    1        50.50.50.1  VLAN 4    0      1
    
```

Destination	
Nexthop Num	
Nexthop Addr	
Nexthop Interface	
Metric	
Pref	

### 37.1.9 show ip pim dense-mode mroute

PIM-DM

**show ip pim dense-mode mroute**

---

**show ip pim dense-mode mroute [ A.B.C.D A.B.C.D ] [ summary ]**

<i>A.B.C.D A.B.C.D</i>	
<b>summary</b>	

/ /

### PIM-DM

```
Ruijie# show ip pim dense-mode mroute
PIM-DM Multicast Routing Table
(1.1.1.111, 229.1.1.1)
MRT lifetime expires in 205 seconds
RPF Neighbor: 50.50.50.1, Nexthop:50.50.50.1,VLAN 4
Upstream IF: VLAN 4
Upstream State: Pruned, PLT:200
Assert State: NoInfo
Downstream IF List:
FastEthernet 0/45:
Downstream State: NoInfo
Assert State: Loser, AT:170
```



- **show ip pim sparse-mode interface**
- **show ip pim sparse-mode local-members**
- **show ip pim sparse-mode mroute**
- **show ip pim sparse-mode neighbor**
- **show ip pim sparse-mode nexthop**
- **show ip pim sparse-mode rp mapping**
- **show ip pim sparse-mode rp-hash**

### 38.1.1 clear ip mroute

**clear ip mroute** { \* | *group\_address* [*source\_address*] }

*	
<i>group_address</i>	
<i>group_address</i> <i>source_address</i>	

```
Ruijie# clear ip mroute *
Ruijie# clear ip mroute 224.2.2.2
Ruijie# clear ip mroute 224.2.2.2 2.2.2.2
```

### 38.1.2 clear ip mroute statistics

**clear ip mroute statistics** { \* | *group\_address* [*source\_address*] }

*	

<i>group_address</i>	
<i>group_address</i>	

PIM-SM  
8B0mfrE QAFp]4rDQØ

*[hash-mask-length][priority-value]*

<i>interface-type interface-number</i>	
<i>hash-mask-length</i>	<0-32> RP HASH

<i>access-list</i>	access-list <1 99> <1300 1999> acl group-list access-list


PIM

cisco

PIM

PIM  
PIM

# e i # ) g R u f D i e # u R

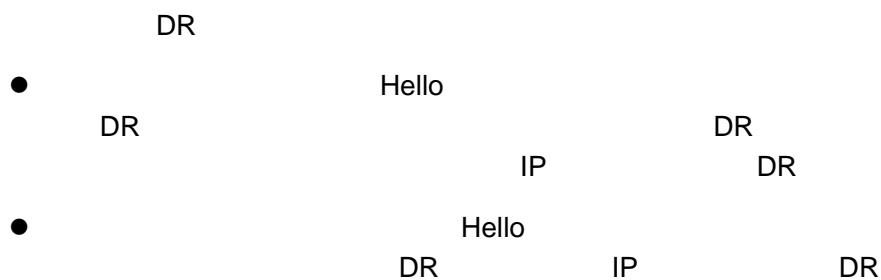

```

Ruijie# configure terminal
Ruijie(config)# interface g 0/3
Ruijie(config-if)# ip pim dr-priority 10000
  
```

### 38.1.9 ip pim ignore-rp-set-priority

```
ip pim ignore-rp-set-priority
```

```
RP-SET RP
```

```
RP RP
```

```

Ruijie# configure terminal
Ruijie(config)# ip pim ignore-rp-set-priority
  
```

### 38.1.10 ip pim jp-timer

```
ip pim jp-timer interval-seconds
```



<i>access_list</i>	access-list	acl	1-99	acl

PIM

PIM-SM

peering

```

Ruijie# configure terminal
Ruijie(config)# interface g 0/3
Ruijie(config-if)# ip pim neighbor-filter 14
Ruijie(config-if)# exit
Ruijie(config)# access-list 14 deny 192.168.1.5
0.0.0.255

```

**access-list**

### 38.1.13 ip pim query-interval

**ip pim query-interval** *interval-seconds*

<i>interval-seconds</i>	<1-65535>

Hello

30s

```

Hello          Hello          Hello          Hello          3.5
              Hello
Hello          * 3.5 > 65535   Hello
65535

```

```

Ruijie# configure terminal
Ruijie(config)# interface g 0/3
Ruijie(config-if)# ip pim query-interval 123

```

### 38.1.14 ip pim register-rate-limit

**ip pim register-rate-limit *rate***

<i>rate</i>	register <1-65535>

S G

DR RP

```

Ruijie# configure terminal
Ruijie(config)# ip pim register-rate-limit 3000

```

### 38.1.15 ip pim register-rp-reachability

**ip pim register-rp-reachability**

RP

RP

```
Ruijie# configure terminal
Ruijie(config)# ip pim register-rp-reachability
```

### 38.1.16 ip pim register-source

```
ip pim register-source {local_address | interface-type
interface-number}
```

<i>local_address</i>	IP	
<i>interface-type</i> <i>interface-number</i>	IP	IP

IP

DR

IP

RP  
Register-Stop

IP

---

r

PIM-SM

---

```
Ruijie# configure terminal
Ruijie(config)# ip pim register-source 192.168.195.80
Ruijie(config)# ip pim register-source g 0/3
```

### 38.1.17 ip pim register-suppression

**ip pim register-suppression** *seconds*

<i>seconds</i>	<11-21843>

60

DR RP ip pim  
rp-register-kat RP RP keepalive

```
Ruijie# configure terminal
Ruijie(config)# ip pim register-suppression 100
```

### 38.1.18 ip pim rp-address

**ip pim rp-address** *rp-address* [*access\_list*]

<i>rp-address</i>	RP	IP	
<i>access_list</i>	access-list <1300-1999>	acl acl	<1-99>

RP

RP

RP BSR

- BSR RP
- RP ACL RP ACL
- RP IP RP
- ACL 224/4 ACL
- RP RP RP
- IP RP RP
- RP RP RP

```
Ruijie# configure terminal
Ruijie(config)# ip pim rp-address 210.34.0.55
Ruijie(config)# ip pim rp-address 210.34.0.55 4
Ruijie(config)# access-list 4 permit 225.1.1.1
0.0.0.255
```

**access-list**

### 38.1.19 ip pim rp-candidate

```
ip pim rp-candidate interface-type interface-number [priority
priority-value][interval interval-seconds][group-list
```

<i>interface-type</i> <i>interface-number</i>	
<i>priority-value</i>	<0-255> priority priority-value 192
<i>Interval-seconds</i>	<1-16383> interval interval-seconds interval-seconds 60s
<i>access_list</i>	acl 1-99 acl group-list access_list

RP

```

PIM-SM          RPT          RP
BSR              C-RP        BSR      C-RP
BSR      PIM

RP              acl
permit ace      deny
ace
    
```

```

Ruijie# configure terminal
Ruijie(config)# ip pim rp-candidate g 0/3
Ruijie(config)# ip pim rp-candidate g 0/3 priority 200
group-list 3 interval 70
Ruijie(config)# access-list 3 permit 225.1.1.1
0.0.0.255
    
```

**access-list**

### 38.1.20 ip pim rp-register-kat

**ip pim rp-register-kat seconds**

<i>seconds</i>	KAT <1-65535>

RP KAT 210s

RP KAT

```
Ruijie# D1gure terminal
Ruijie(TD1lg)# ip pim rp-register-kat 250
```

### 38.1.21 ip pim sparse-mode

**ip pim sparse-mode**

PIM-SM

PIM-SM

```
Ruijie# D1gure terminal
Ruijie(TD1lg)# interface g 0/3
Ruijie(TD1lg-if)# ip pim sparse-mode
```



PIM-SM  
PIM-SM

PIM-SM IGMP

Failed to enable PIM-SM on <  
>, resource temporarily unavailable, please try again

PIM-SM Configure failed! VIF limit  
exceeded in NSM!!!

PIM-SM PIM-DM DVMRP PIM-SM  
v4

### 38.1.22 ip pim spt-threshold

**ip pim spt-threshold [group-list access-list]**

	access-list	acl	1-99
<i>access-list</i>	1300-1999	acl	
	group-list access-list		
	SPT		

SPT

SPT

RPT SPT

SPT

**access-list**

### 38.1.23 ip pim ssm

**ip pim ssm { default / range access\_list }**

<b>default</b>	232/8
<i>access_list</i>	acl 1-99 acl

SSM

PIM-SSM

PIM-SSM

232/8

```
Ruijie# configure terminal
```

```
Ruijie(config)# ip pim ssm default
```

10

```
Ruijie(config)# ip pim ssm range 10
```

```
Ruijie(config)# access-list 10 permit 232.0.0.1  
0.0.0.255
```

**access-list**

### 38.1.24 show debugging

/ /

```
Ruijie #show debugging
PIM-SM Debugging status:
  PIM packet debugging is on
```

### 38.1.25 show ip pim sparse-mode bsr-router

**show ip pim sparse-mode bsr-router**

/ /

BSR .

```
Ruijie# show ip pim sparse-mode bsr-router
PIMv2 Bootstrap information
This system is the Bootstrap Router (BSR)
BSR address: 192.168.127.1
Uptime:      01d23h14m, BSR Priority: 64, Hash mask
length: 10
Next bootstrap message in 00:00:42
Role: Candidate BSR  Priority: 64, Hash mask length: 10
State: Elected BSR
Candidate RP: 30.30.100.200(GigabitEthernet 0/3)
Advertisement interval 60 seconds
Next Cand_RP_advertisement in 00:00:32
```

### 38.1.26 show ip pim sparse-mode interface

**show ip pim sparse-mode interface** [*interface-type interface-number*]  
**[detail]** ]

<i>interface-type</i>	
<i>interface-number</i>	
<i>detail</i>	

/ /

PIM SM

```
Ruijie# show ip pim sparse-mode interface detail
GigabitEthernet 0/3 (vif 2):
Address 30.30.100.200, DR 30.30.100.200
Hello period 30 seconds, Next Hello in 13 seconds
Triggered Hello period 5 seconds
Neighbors:
30.30.100.1
```

### 38.1.27 show ip pim sparse-mode local-members

**show ip pim sparse-mode local-members** [*interface-type*]  
*interface-number*]

<i>interface-type</i>	
<i>interface-number</i>	

/ /

PIM SM

IGMP

```
Ruijie# show ip pim sparse-mode local-members
PIM Local membership information
GigabitEthernet 0/3:
```

```
(* , 225.1.1.1) : Include  
Loopback 1:
```

### 38.1.28 show ip pim sparse-mode mroute

```
show ip pim sparse-mode mroute {group_address| source_address }
```

<i>group_address</i>	A.B.C.D

### **38.1.30 show ip pim sparse-mode nexthop**

**show ip pim sparse-mode rp-hash** *group-address*

<i>group-address</i>	

/ /

RP

```
Ruijie# show ip pim sparse-mode rp-hash 225.1.1.1  
RP: 30.30.100.1  
Info source: 30.30.100.1, via bootstrap
```

---

# 39

## 39.1

- clear ip mroute
- clear ip mroute statistics
- ip mroute
- ip multicast route-limit
- ip multicast ttl-threshold
- ip multicast-routing
- ip multicast-rpf
- ip multicast boundary
- ip multicast static
- show ip mroute
- show ip rpf
- show ip mvif

### 39.1.1 clear ip mroute

IP

**clear ip mroute** { \* | *group-address* [*source -address*]

*	
<i>group-address</i>	
<i>source -address</i>	

---

230.0.0.1

Ruijie# **clear ip mroute 230.0.0.1**

<b>show ip mroute</b>	

### 39.1.2 clear ip mroute statistics

IP

**clear ip mroute statistics** { \* | *group-address* [*source -address*]

*	
<i>group-address</i>	
<i>source -address</i>	

IP

230.0.0.1

Ruijie# **clear ip mroute statistics 230.0.0.1**

**show ip mroute**

---

**clear ip mroute**

### 39.1.3 ip mroute

no

**ip mroute** *source-address mask* [*protocol*] {*rpf-address* | *interface-type interface-number*} [*distance*]

**no ip mroute** *source-address mask* [*protocol*] {*rpf-address* | *interface-type interface-number*} [*distance*]

<i>source-address</i>	
<i>mask</i>	
<i>protocol</i>	
<i>rpf-address</i>	
<i>interface-type</i> <i>interface-number</i>	



---

TTL Time-To-Live

**no**

**ip multicast ttl-threshold** *ttl-value*

**no ip multicast ttl-threshold**

<i>ttl-value</i>	TTL , 0~255

*ttl-value* 1

TTL TTL  
TTL TTL 0

TTL 5

Ruijie(config-if)# **ip multicast ttl-threshold 5**

### 39.1.6 ip multicast-routing

**no**

**ip multicast-routing**

**no ip multicast-routing**

IPv4

IPv4

---

r

S3760

IGMP SNOOPING

---

Ruijie(config)# ip multicast-routing

---



v4

---

### 39.1.7 ip multicast-rpf

RPF

**ip multicast-rpf** *rpf-mode*

**no ip multicast-rpf**

<i>rpf-mode</i>	routed-port Svi                      SVI

SVI

S3760

S3760

SVI

RPF

RPF

routed-p

ort

S3760

SVI

RPF

---

## 39.1.8 ip multicast boundary

IP IP no

**ip multicast boundary** *access-list*

**no ip multicast boundary** *access-list*

<i>access-list</i>	IP access-list ACL

ACL IP IP ACL ACL ACL

---

r

IP IGMP PIMSM

---

svi1 IP

```
Ruijie(config)# ip access-list mul-boun
Ruijie(config-std-nacl)# permit ip 233.3.3.0 0.0.0.255
Ruijie(config-std-nacl)# exit
Ruijie(config)# interface vlan 1
Ruijie(config-if)# ip multicast boundary mul-boun
```

## 39.1.9 ip multicast static

no

---

**ip multicast static** *source-address group-address interface-type interface-number*

**no ip multicast static** *source-address group-address interface-type interface-number*



*source -address*

---

**show ip mroute** [ *group-address*] [*source-address*] [**dense**][ **sparse**]  
[**summary**] [**count**]

<i>group-address</i>	
<i>source-address</i>	
<b>dense</b>	PIMDM
<b>sparse</b>	PIMSM
<b>summary</b>	
<b>count</b>	

```
Ruijie# show ip mroute
IP Multicast Routing Table
Flags: I - Immediate Stat, T - Timed Stat, F - Forwarder
installed
Timers: Uptime/Stat Expiry
Interface State: Interface (TTL)
(10.10.1.52, 224.0.1.3), uptime 00:00:31, stat expires
00:02:59
Owner PIM-SM, Flags: TF
Incoming interface: FastEthernet 2/1
Outgoing interface list:
FastEthernet 1/3
```

```
Ruijie# show ip mroute 10.10.1.52 224.0.1.3
IP Multicast Routing Table
Flags: I - Immediate Stat, T - Timed Stat, F - Forwarder
installed
```

---

```

Timers: Uptime/Stat Expiry
Interface State: Interface (TTL)
(10.10.1.52, 224.0.1.3), uptime 00:03:24, stat expires
00:01:28
Owner PIM-SM, Flags: TF
Incoming interface: FastEthernet 2/1
Outgoing interface list:
FastEthernet 1/3

```

```

Ruijie# show ip mroute count
IP Multicast Statistics
Total 1 routes using 132 bytes memory
Route limit/Route threshold: 2147483647/2147483647
Total NOCACHE/WRONGVIF/WHOLEPKT rcv from fwd: 1/0/0
Total NOCACHE/WRONGVIF/WHOLEPKT sent to clients: 1/0/0
Immediate/Timed stat updates sent to clients: 0/0
Reg ACK rcv/Reg NACK rcv/Reg pkt sent: 0/0/0
Next stats poll: 00:01:10
Forwarding Counts: Pkt count/Byte count, Other Counts:
Wrong If pkts
Fwd msg counts: WRONGVIF/WHOLEPKT rcv
Client msg counts: WRONGVIF/WHOLEPKT/Imm Stat/Timed
Stat sent
Reg pkt counts: Reg ACK rcv/Reg NACK rcv/Reg pkt sent
(10.10.1.52, 224.0.1.3), Forwarding: 2/19456, Other: 0
Fwd msg: 0/0, Client msg: 0/0/0/0, Reg: 0/0/0

```

```

Ruijie# show ip mroute summary
IP Multicast Routing Table
Flags: I - Immediate Stat, T - Timed Stat, F - Forwarder
installed
Timers: Uptime/Stat Expiry
Interface State: Interface (TTL)
(10.10.1.52, 224.0.1.3), 00:01:32/00:03:20, PIM-SM,
Flags: T

```

Flags	I- T- F-
Timers:Uptime/Stat Expiry	
Interface State	

---

Owner	
Incoming interface	
Outgoing interface list	
Forwarding Counts Pkt count/Byte count,	/
Other Counts: Wrong If pkts	

---

192.168.1.54 RPF

```
Ruijie# show ip rpf 192.168.1.54
RPF information for 192.168.1.54
RPF interface: VLAN 1
RPF neighbor: 0.0.0.0
RPF route: 192.168.1.0/24
RPF type: unicast (connected)
RPF recursion count: 0
Doing distance-preferred lookups across tables
Distance: 0
Metric: 0 RPF information for 192.168.1.54
RPF interface: VLAN 1
RPF neighbor: 0.0.0.0
RPF route: 192.168.1.0/24
RPF type: unicast (connected)
RPF recursion count: 0
Doing distance-preferred lookups across tables
Distance: 0
Metric: 0
```

### 39.1.12 show ip mvif

**show ip mvif** { *interface-type interface-number* }

<i>interface-type interface-number</i>	

svi1

```
Ruijie# show ip mvif vlan 1
```

---

Interface		Vif	Owner	TTL	Local
Remote		Uptime			
Idx	Module	Address		Address	
VLAN 1		1	PIM-DM	2	192.168.1.1
0.0.0.0		00:13:16			

## 39.2 IP

IP

- **debug nsm mcast all**
- **debug nsm mcast fib-msg**
- **debug nsm mcast vif**
- **debug nsm mcast register**
- **debug nsm mcast stats**

### 39.2.1 debug nsm mcast all

**no**

**debug nsm mcast all**

Ruijie# **debug nsm mcast all**

---

## 39.2.2 debug nsm mcast fib-msg

no

debug nsm mcast fib-msg

---



---

# 40

## 40.1

- **storm-control**
- **switchport protected**
- **switchport port-security**
- **switchport port-security aging**
- **switchport port-security mac-address**
- **port-security arp-check**

### 40.1.1 storm-control

**no**

**storm-control** {**broadcast** | **multicast** | **unicast**} [{**level** *percent* | **pps** *packets* | *rate-bps*}]

**no storm-control** {**broadcast** | **multicast** | **unicast**} [ {**level** *percent* | **pps** *packets* | *rate-bps*}]

**broadcast**

**multicast**

**unicast**

*percent* 20 20%

*packets* pps packets per second

*Rate-bps*

*64k-2M* 64k

*2-100M* 1M

*100M* 8M

---

**show storm-control**

GigabitEthernet 1/1  
4M

```
Ruijie# configure terminal  
Ruijie(config)# interface GigabitEthernet 1/1  
Ruijie(config-if)# storm-control multicast 4096  
Ruijie(config-if)# end
```

<b>show storm-control</b>	

## 40.1.2 switchport protected

**no**

**switchport protected**  
**no switchport protected**

3

**show interfaces**

---

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport protected
```

show interfaces	

S32 S37

acl

### 40.1.3 switchport port-security

no

```
switchport port-security [violation {protect | restrict | shutdown}]
```

```
no switchport port-security [violation]
```

--	--

```
/TT3 1 Tf10.5 0 0 TD-0TD0 Tc0 Twb74192353c1b8d1e1403e1TT2 1 Tf26 0 T( )Tj/TT5 1
```

Gigabitethernet 1/1  
shutdown

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport port-security
Ruijie(config-if)# switchport port-security
violation shutdown
```

show port-security	

#### 40.1.4 switchport port-security aging

no

switchport port-security aging {static | time *time*}

no switchport port-security aging {static | time }

Static	
time time	1440 0 0

time no switchport port-security aging  
no switchport

---

## port-security aging static

### show port-security

```
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport port-security aging time
8
Ruijie(config-if)# switchport port-security aging
static
```

show port-security	

## 40.1.5 switchport port-security mac-address

no

**switchport port-security** [**mac-address** *mac-address* [**ip-address** *ip-address* ]] | [**maximum** *value*]

**no switchport port-security** [ **mac-address** *mac-address* [**ip-address** *ip-address* ]] | [**maximum**]

<b>mac-address</b> <i>mac-address</i>	
<b>ip-address</b> <i>ip-address</i>	IP
<b>ip-address</b> <i>ipv6-address</i>	IPV6
<b>maximum</b> <i>value</i>	

---

```
ACL          IP      MAC
ACL          802.1x  IP
              IP

00d0.f800.073c      gigabitethernet 1/1
                    IP      192.168.12.202

Ruijie# configure terminal
Ruijie(config)# interface gigabitethernet 1/1
Ruijie(config-if)# switchport mode access
```

---

<b>show port-security</b>	

## 40.2

- **show storm-control**
- **show port-security**

### 40.2.1 show storm-control

**show storm-control** [*interface-id*]

<i>interface-id</i>	

```
Ruijie# show storm-control gigabitethernet 1/1
Interface Broadcast Control Multicast Control Unicast
Control
-----
Gil/1 Disabled Disabled Disabled
```

--	--

---

**show port-security [address] [interface *interface-id*]**

<b>address</b>	
<b>interface <i>interface-id</i></b>	

```
Ruijie# show port-security
Secure Port MaxSecureAddr(count) CurrentAddr(count)
Security Action
-----
Gi1/1 128 1 Restrict
Gi1/2 128 0 Restrict
Gi1/3 8 1 Protect
```

<b>switchport port-security</b>	
<b>switchport port-security aging</b>	
<b>switchport port-security mac-address</b>	

# 41            802.1X

## 41.1 dot1x

dot1x

- dot1x auto-req
- dot1x auto-req packet-num
- dot1x auto-req req-interval
- dot1x auto-req user-detect

### 41.1.1 dot1x auto-req

802.1X  
no

dot1x auto-req

[no] dot1x auto-req

Req-Interval: 30 Second

<b>show dot1x auto-req</b>	

### 41.1.2 dot1x auto-req packet-num

no

**dot1x auto-req packet-num** *num*

**no dot1x auto-req packet-num**

*num*

num = 0;

**show dot1x auto-req**

802.1x

Ruijie# **configure terminal**

Ruijie(config)# **dot1x auto-req packet-num 0**

Ruijie(config)# **end**

Ruijie# **show dot1x auto-req**

Auto-Req: Enabled

User-Detect : Enabled

Packet-Num : 0

Req-Interval: 30 Second

<b>show dot1x auto-req</b>	

### 41.1.3 dot1x auto-req req-interval

**no**

**dot1x auto-req req-interval *interval***

**no dot1x auto-req req-interval**

*interval*

s

30

**show dot1x auto-req**

802.1x

60s

Ruijie# **configure terminal**

Ruijie(config)# **dot1x auto-req req-interval 60**

Ruijie(config)# **end**

Ruijie#

**show dot1x auto-req**

```
Ruijie# configure terminal
Ruijie(config)# dot1x auto-req user-detect
Ruijie(config)# end
Ruijie# show dot1x auto-req
Auto-Req: Enabled
User-Detect : Enabled
Packet-Num : 0
Req-Interval: 60 Second
```

<b>show dot1x auto-req</b>	

## 41.2 dot1x

dot1x

- **dot1x timeout quiet-period**
- **dot1x timeout re-authperiod**
- **dot1x timeout server-timeout**
- **dot1x timeout supp-timeout**
- **dot1x timeout tx-period**

### 41.2.1 dot1x timeout quiet-period

**no**

**dot1x timeout quiet-period**

```
seconds
0 65535 s
```

10

### show dot1x

1000s

```
Ruijie# configure terminal
Ruijie(config)# dot1x timeout quiet-period 1000
Ruijie(config)# end
Ruijie# show dot1x
802.1X Status:          Enabled
Authentication Mode:    EAP-MD5
Authed User Number:    0
Re-authen Enabled:     Disabled
Re-authen Period:      3600 sec
Quiet Timer Period:    1000 sec
Tx Timer Period:       3 sec
Supplicant Timeout:    3 sec
Server Timeout:        5 sec
Re-authen Max:         3 times
Maximum Request:       3 times
Filter Non-RG Supp:    Disabled
Client Oline Probe:    Disabled
Eapol Tag Enable:      Disabled
Authorization Mode:     Group Server
```

<b>show dot1x</b>	802.1x

## 41.2.2 dot1x timeout re-authperiod

**no**

```
dot1x timeout re-authperiod seconds
no dot1x timeout re-authperiod
```

```
seconds                0  65535    s
```

```
3600
```

```
show dot1x            802.1x
```

```
1000s
```

```
Ruijie# configure terminal
Ruijie(config)# dot1x timeout re-authperiod 1000
Ruijie(config)# end
Ruijie# show dot1x
802.1X Status:          Enabled
Authentication Mode:    EAP-MD5
Authed User Number:    0
Re-authen Enabled:     Disabled
Re-authen Period:      1000 sec
Quiet Timer Period:    1000 sec
Tx Timer Period:        3 sec
Supplicant Timeout:    3 sec
Server Timeout:         5 sec
Re-authen Max:          3 times
Maximum Request:        3 times
Filter Non-RG Supp:    Disabled
Client Oline Probe:    Disabled
Eapol Tag Enable:      Disabled
Authorization Mode:     Group Server
```

show dot1x	802.1x

### 41.2.3 dot1x timeout server-timeout

**no**

<b>show dot1x</b>	802.1x
-------------------	--------

## 41.2.4 dot1x timeout supp-timeout

no

**dot1x timeout supp-timeout** *seconds*

**no dot1x timeout supp-timeout**

*seconds*

0

65535

3

<b>show dot1x</b>	802.1x
-------------------	--------

10s

```
Ruijie# configure terminal
```

```
Ruijie(config)# dot1x timeout supp-timeout 10
```

```
Ruijie(config)# end
```

```
Ruijie# show dot1x
```

```
802.1X Status:      Enabled
Authentication Mode: EAP-MD5
Authed User Number: 0
Re-authen Enabled:  Disabled
Re-authen Period:   1000 sec
Quiet Timer Period: 1000 sec
Tx Timer Period:    3 sec
Supplicant Timeout: 10 sec
Server Timeout:     10 sec
Re-authen Max:      3 times
Maximum Request:    3 times
Filter Non-RG Supp: Disabled
Client Oline Probe: Disabled
Eapol Tag Enable:   Disabled
Authorization Mode:  Group Server
```

<b>show dot1x</b>	802.1x

## 41.2.5 dot1x timeout tx-period

no

**dot1x timeout tx-period** *seconds*

**no dot1x timeout tx-period**

*seconds*                            0    65535

3

**show dot1x**                        802.1x

10s

Ruijie# **configure terminal**

Ruijie(config)# **dot1x timeout tx-period 10**

Ruijie(config)# **end**

Ruijie# **show dot1x**

802.1X Status:            Enabled  
Authentication Mode:    EAP-MD5  
Authenticated User Number:    0  
Re-authen Enabled:        Disabled  
Re-authen Period:        1000 sec  
Quiet Timer Period:       1000 sec  
Tx Timer Period:          10 sec  
Supplicant Timeout:      10 sec  
Server Timeout:           10 sec  
Re-authen Max:            3 times  
Maximum Request:         3 times  
Filter Non-RG Supp:      Disabled

```
Client Oline Probe: Disabled
Eapol Tag Enable: Disabled
Authorization Mode: Group Server
```

<b>show dot1x</b>	802.1x

## 41.3 dot1x

- **dot1x re-authentication**
- **dot1x reauth-max**

### 41.3.1 dot1x re-authentication

no

**[no] dot1x re-authentication**

**show dot1x**                    802.1x

```
Ruijie# configure terminal
Ruijie(config)# dot1x re-authentication
Ruijie(config)# end
Ruijie# show dot1x
802.1X Status: Enabled
Authentication Mode: EAP-MD5
```

```

Authed User Number: 0
Re-authen Enabled: Enabled
Re-authen Period: 1000 sec
Quiet Timer Period: 1000 sec
Tx Timer Period: 10 sec
Supplicant Timeout: 10 sec
Server Timeout: 10 sec
Re-authen Max: 3 times
Maximum Request: 3 times
Filter Non-RG Supp: Disabled
Client Oline Probe: Disabled
Eapol Tag Enable: Disabled
Authorization Mode: Group Server

```

<b>show dot1x</b>	802.1x

### 41.3.2 dot1x reauth-max

**no**

**dot1x reauth-max** *count*

**no dot1x reauth-max**

*count*

3

**show dot1x** 802.1x

Ruijie# **configure terminal**

Ruijie(config)# **dot1x reauth-max** 5

Ruijie(config)# **end**

```
Ruijie# show dot1x
```

```
802.1X Status:      Enabled
Authentication Mode: EAP-MD5
Authed User Number: 0
Re-authen Enabled:  Enabled
Re-authen Period:   1000 sec
Quiet Timer Period: 1000 sec
Tx Timer Period:    10 sec
Supplicant Timeout: 10 sec
Server Timeout:     10 sec
Re-authen Max:      5 times
Maximum Request:    3 times
Filter Non-RG Supp: Disabled
Client Oline Probe: Disabled
Eapol Tag Enable:   Disabled
Authorization Mode:  Group Server
```

show dot1x	802.1x

## 41.4 dot1x

- dot1x probe-timer
- dot1x client-probe enable

### 41.4.1 dot1x probe-timer

```
dot1x probe-timer{interval | alive}interval
no dot1x probe-timer
```

```
no
```

```
interval hello
```

```
alive
```

```
interval
```

```

Hello          20
               250

```

```

show dot1x      802.1x

```

```

hello          30 ,          120

```

```

Ruijie# configure terminal
Ruijie(config)# dot1x probe-timer interval 30
Ruijie(config)# dot1x probe-timer alive 120
Ruijie(config)# end
Ruijie# show dot1x probe-timer
Hello Interval: 30 Seconds
Hello Alive: 120 Seconds

```

Show dot1x probe-timer	

#### 41.4.2 dot1x client-probe enable

```

[no] dot1x client-probe enable

```

```
Ruijie# configure terminal
Ruijie(config)# dot1x client-probe enable
Ruijie(config)# end
Ruijie# show dot1x
802.1X Status:          Enabled
Authentication Mode:    EAP-MD5
Authed User Number:    0
Re-authen Enabled:     Enabled
Re-authen Period:      1000 sec
Quiet Timer Period:    1000 sec
Tx Timer Period:       10 sec
Supplicant Timeout:    10 sec
Server Timeout:        10 sec
Re-authen Max:         5 times
Maximum Request:       3 times
Filter Non-RG Supp:    Disabled
Client Oline Probe:    Enabled
Eapol Tag Enable:      Disabled
Authorization Mode:     Group Server
```

<b>show dot1x</b>	dot1x

## 41.5 dot1x

dot1x

- **dot1x authentication**
- **dot1x auth-address-table**
- **dot1x auth-mode**
- **dot1x default**
- **dot1x dynamic-vlan enable**
- **dot1x guest-vlan enable**
- **dot1x eapol-tag**
- **dot1x max-req**
- **dot1x private-supplicant-only**
- **dot1x port-control auto**
- **dot1x port-control-mode**
- **dot1x stationarity enable**

## 41.5.1 dot1x authentication

AAA

AAA

**no****dot1x authentication** {default | *list-name*}**no dot1x authentication** {default | *list-name*}**default***list-name*

AAA

AAA

AAA

dot1x

group radius

```

Ruijie# configure terminal
Ruijie(config)# aaa new-model
Ruijie(config)# aaa authentication dot1x default group radius
Ruijie(config)# interface fastEthernet0/1
Ruijie(config-if)# dot1x authentication default
Ruijie(config-if)# end
Ruijie#

```

<b>aaa new-model</b>	AAA
<b>aaa authentication dot1x</b>	

## 41.5.2 dot1x auth-address-table

802.1X

**no**

```

dot1x auth-address-table address mac-addr interface interface
no dot1x auth-address-table address mac-addr interface interface

```

*mac-addr*

*Interface*

```

802.1X          show dot1x
auth-address table

```

```

Ruijie# configure terminal
Ruijie(config)# dot1x auth-address-table address
00d0f8000000 interface ethernet 1/1
Ruijie(config)# end
Ruijie#

```

show dot1x auth-address-table	802.1X

### 41.5.3 dot1x auth-fail max-attempt

VLAN

```

dot1x auth-fail max-attempt num
no dot1x auth-fail max-attempt

```

<i>num</i>	VLAN , 1-3

3

**show dot1x**

```

                                VLAN
Ruijie# configure terminal
Ruijie(config)# dot1x auth-fail max-attempt 5
Ruijie(config)# end
Ruijie#write

```

<b>show dot1x</b>	802.1x

-	-

**41.5.4 dot1x auth-fail vlan**

802.1x          vlan

**dot1x auth-fail vlan vid**

**no dot1x auth-fail vlan**

<i>vid</i>	vlan vid

vlan

**show dot1x interface**

```

                                802.1x          vlan
Ruijie# configure terminal
Ruijie(config)# interface fa 0/1
Ruijie(config-if)# dot1x auth-fail vlan 2

```

```
Ruijie(config-if)# end
Ruijie#write
```

<b>show dot1x interface</b>	802.1x

-	-

### 41.5.5 dot1x auth-mode

802.1x

**dot1x auth-mode** {eap-md5 | chap | pap}

**no dot1x auth-mode**

**eap-md5** 802.1x EAP-MD5

**chap** 802.1x CHAP

**pap** 802.1x PAP

EAP-MD5

**show dot1x**

802.1x

802.1x

```
Ruijie# configure terminal
```

```
Ruijie(config)# dot1x auth-mode chap
```

```
Ruijie(config)# end
```

```
Ruijie#
```

<b>show dot1x</b>	802.1x

### 41.5.6 dot1x default

802.1x

**dot1x default**

**show dot1x**            802.1x

802.1x

```
Ruijie# configure terminal
Ruijie(config)# dot1x default
Ruijie(config)# end
Ruijie# end
```

<b>show dot1x</b>	802.1x

### 41.5.7 dot1x dynamic-vlan enable

vlan

**no**

**show dot1x dynamic-vlan**                      802.1x

802.1x      vlan

```
Ruijie# configure terminal
Ruijie(config)# interface fastEthernet 0/1
Ruijie(config-if)# dot1x dynamic-vlan enable
Ruijie(config-if)# end
Ruijie#
```

<b>show dot1x</b>	802.1x

vlan

3. **show running-config** 802.1x

802.1x guest vlan

```

Ruijie# configure terminal
Ruijie(config)# interface fastEthernet 0/1
Ruijie(config-if)# dot1x guest-vlan 10
Ruijie(config)# end
Ruijie#

```

<b>show running-config</b>	802.1x

### 41.5.9 dot1x eapol-tag

EAPOL TAG

```

dot1x eapol-tag
no dot1x eapol-tag

```

**show dot1x** 802.1x

802.1X tag

```

Ruijie# configure terminal
Ruijie(config)# dot1x eapol-tag
Ruijie(config)# end
Ruijie#

```



**dot1x mac-auth-bypass timeout-activity *value***

**no dot1x mac-auth-bypass timeout-activity**

<i>value</i>	, 1-65535

**show run 802.1x**

802.1x MAC

Ruijie# **configure terminal**

Ruijie(config)# **interface fa 0/1**

Ruijie(config-if)# **dot1x mac-auth-bypass timeout-activity 3600**

Ruijie(config-if)# **end**

Ruijie#write

**show dot1x port-control interface**

802.1x

-	-

## 41.5.12 dot1x mac-auth-bypass violation

802.1x MAC

**dot1x mac-auth-bypass violation**

**no dot1x mac-auth-bypass violation**

<i>v</i>	

```
show run      802.1x
```

```
802.1x MAC
```

```
Ruijie# configure terminal
```

```
Ruijie(config)# interface fa 0/1
```

```
Ruijie(config-if)# dot1x mac-auth-bypass violation
```

```
Ruijie(config-if)# end
```

```
Ruijie#write
```

<b>show dot1x port-control interface</b>	802.1x

-	-

### 41.5.13 dot1x max-req

```
DOT1X
```

```
DOT1X
```

```
DOT1X
```

```
no
```

```
dot1x max-req count
```

```
no dot1x ma87x-req
```

```
count
```

```
3
```

```
show dot1x
```

```
802.1x
```

802.1x                    7

```
Ruijie# configure terminal
Ruijie(config)# dot1x max-req 7
Ruijie(config)# end
Ruijie#
```

<b>show dot1x</b>	802.1x

#### 41.5.14 dot1x private-supPLICANT-only

**no**

```
dot1x private-supPLICANT-only
no dot1x private-supPLICANT-only
```

## **41.5.15 dot1x port-control auto**

**no**

---

```
dot1x port-control-mode {mac-based | {port-based [single-host]}}
```

```
no dot1x port-control-mode
```

```
mac-based          mac    802.1X
```

```
port-based                802.1X
```

```
single-host                802.1x
```

```
mac-based
```

```
show dot1x port-control                802.1x
```

```
single-host                802.1x                show dot1x
```

```
port-control                port-based        show running-config
```

```
dot1x port-control-mode port-based single-host
```

```
single-host                default-user-limit
```

```
single-host                single-host
```

```
default-user-limit        single-host
```

```
802.1x
```

```
Ruijie(config)# interface g 0/1
```

```
Ruijie(config-if)# dot1x port-control auto
```

```
Ruijie(config-if)# dot1x port-control-mode
```

```
port-based
```

```
Ruijie(config-if)# end
```

```
Ruijie#
```

```
802.1x
```

```
Ruijie(config)# interface g 0/1
```

```
Ruijie(config-if)# dot1x port-control auto
```

```
Ruijie(config-if)# dot1x port-control-mode
```

```
port-based single-host
```

```
Ruijie(config-if)# end
```

```
Ruijie#
```

<b>show dot1x port-control</b>	802.1x
<b>Show running-config</b>	

### 41.5.17 dot1x stationarity enable

802.1x

802.1X

**dot1x stationarity enable****no dot1x stationarity enable**

802.1x

```
Ruijie# configure terminal
Ruijie(config)# dot1x stationarity enable
Ruijie(config)# end
Ruijie#
```

### 41.5.18 dot1x redirect url

802.1x

url url no

url

dot1x redirect url [url-string]

[no ] dot1x redirect url

<i>url-string</i>	URL
-------------------	-----

1

ruijie.net/web

Ruijie(config)# **dot1x redirect url** http://ruijie.net/web

<b>dot1x redirect for special tcp-destination port</b>	ip ip
<b>dot1x redirect time-out</b>	
<b>dot1x redirect num for special source-ip</b>	
<b>show dot1x</b>	dot1x

### 41.5.19 dot1x redirect for special tcp-destination port

80 8080 ip ip web  
16 TCP no dot1x

redirect for special tcp-destination port

port\_num

[no] dot1x redirect for special tcp-destination port num

<i>port num</i>	TCP

tcp

```

|
|
|

```

```

|
|
|

```

```

|
|
|

```

```

1 5
Ruijie(config)# dot1x redirect time-out 5

```

<b>dot1x redirect url</b>	web ip ip
<b>dot1x redirect for special tcp-destination port</b>	
<b>dot1x redirect num for special source-ip</b>	
<b>show dot1x</b>	dot1x

```

|
|
|

```

```

|
|
|

```

-	-

#### 41.5.21 dot1x redirect num for special source-ip

```

|
|
|

```

```

1 1-10
no
dot1x redirect num for special source-ip num
no dot1x redirect num for special source-ip

```

```

|
|
|

```

<i>num</i>	

```

|
|
|

```

```

1

```

```

|
|
|

```

```

|
|
|

```

1 3  
Ruijie(config)# dot1x redirect num for special source-ip 3

---

dot1x redirect url

dot1x redirect for special tcp-destination port ip ip

```
Ruijie# show dot1x
802.1X Status:      Enabled
Authentication Mode: EAP-MD5
Authed User Number: 0
Re-authen Enabled:  Disabled
Re-authen Period:  3600 sec
Quiet Timer Period: 10 sec
Tx Timer Period:   3 sec
Supplicant Timeout: 3 sec
Server Timeout:    5 sec
Re-authen Max:     3 times
Maximum Request:   3 times
Filter Non-RG Supp: Disabled
Client Oline Probe: Disabled
Eapol Tag Enable:  Disabled
Authorization Mode: Group Server
Ruijie#
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	

<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

## 41.6.2 show dot1x auth-address-table

802.1X

**show dot1x auth-address-table***[addressmac-addr][interface interface]*

*mac-addr*

*interface*

```
Ruijie# show dot1x auth-address-table
interface:g3/1
-----
mac addr: 00D0.F800.0001
Ruijie#
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	

---

<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

### 41.6.3 show dot1x auto-req

802.1x

**show dot1x auto-req**

```
Ruijie# show dot1x auto-req  
Auto-Req: Disabled  
User-Detect : Enabled  
Packet-Num : 0  
Req-Interval: 30 Seconds  
Ruijie#
```

--	--

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

### 41.6.5 show dot1x max-req

**show dot1x max-req**

```
Ruijie# show dot1x max-req  
max-req: 2 times  
Ruijie#
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

### 41.6.6 show dot1x port-control

**show dot1x port-control** [*interface interface*]

*interface*

```
Ruijie# show dot1x port-control  
interface dyn-user static-user max-user qos
```

```

ctrl-mode status
-----
Gi0/1      0          1          6000      dscp: 0
mac-base Authed
Ruijie#

```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

### 41.6.7 show dot1x probe-timer

```
show dot1x probe-timer
```





```
Ruijie# show dot1x reauth-max  
reauth-max: 2 times  
Ruijie#
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

#### 41.6.10 show dot1x summary

802.1X

**show dot1x summary**

```
Ruijie# show dot1x summary
ID      MAC          Interface VLAN Auth-State
Backend-State Port-Status Type
-----
1 00d0f8000000 Gi0/1      1 Authenticated Idle
Authed   Static
Ruijie#
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	
<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

#### 41.6.11 show dot1x user id

802.1X

```
show dot1x user id
```

*id* show summary *id*

<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	
<b>dot1x timeout supp-timeout</b>	
<b>dot1x timeout tx-period</b>	

## 41.6.12 show dot1x timeout

802.1X

```
show dot1x timeout quiet-period
show dot1x timeout re-authperiod
show dot1x timeout server-timeout
show dot1x timeout supp-timeout
show dot1x timeout tx-period
```

```
Ruijie# show dot1x timeout quiet-period
quiet-period: 60 sec
```

<b>dot1x auth-mode</b>	802.1x
<b>dot1x max-req</b>	

<b>dot1x port-control auto</b>	
<b>dot1x reauth-max</b>	
<b>dot1x re-authentication</b>	
<b>dot1x timeout quiet-period</b>	
<b>dot1x timeout re-authperiod</b>	
<b>dot1x timeout server-timeout</b>	

**u5luppout servout quiet-period**

## 42 AAA

### 42.1

- **aaa authentication dot1x**
- **aaa authentication enable**
- **aaa authentication login**
- **aaa authentication ppp**
- **login authentication**

#### 42.1.1 aaa authentication dot1x

```

AAA      802.1X      aaa
authentication dot1x 802.1X      no
      802.1X

```

```
aaa authentication dot1x {default | list-name} method1 [method2...]
```

```
no aaa authentication dot1x {default | list-name}
```

```
default      802.1X
```

```
list-name      802.1X
```

```
method      4
```

<b>local</b>	
<b>none</b>	
<b>group</b>	RADIUS

```

AAA 802.1X AAA 802.1X
aaa authentication dot1x
802.1X

```

```

rds_d1x AAA 802.1X
RADIUS RADIUS

```

```

Ruijie(config)# aaa authentication dot1x rds_d1x group
radius local

```

aaa new-model	AAA
dot1x authentication	802.1X
username	

## 42.1.2 aaa authentication enable

```

AAA Enable aaa authentication
enable Enable no

```

```

aaa authentication enable default method1 [method2...]

```

```

no aaa authentication enable default

```

```

default Enable
Enable

```

```

method 4

```

local	
none	
group	TACACS+ RADIUS

AAA Enable AAA Enable  
**aaa authentication enable**  
Enable  
Enable

<b>local</b>	
<b>none</b>	
<b>group</b>	RADIUS TACACS+

AAA AAA Login

**aaa authentication login**

Login

Login

Login

list-1 AAA Login

RADIUS

RADIUS

```
Ruijie(config)# aaa authentication login list-1 group
radius local
```

<b>aaa new-model</b>	AAA
<b>username</b>	
<b>login authentication</b>	Login

#### 42.1.4 aaa authentication ppp

AAA PPP **aaa**  
**authentication ppp** PPP no

```
aaa authentication ppp {default | list-name} method1 [method2...]
```

```
no aaa authentication ppp {default | list-name}
```

```
default PPP
```

```
list-name PPP
```

```
method 4
```

local	
none	
group	RADIUS

```
AAA PPP AAA PPP
aaa authentication ppp
PPP
```

```
rds_ppp AAA PPP
RADIUS RADIUS
```

```
Ruijie(config)# aaa authentication ppp rds_ppp group
radius local
```

## 42.1.5 login authentication

```

                    Login
login authentication      Login
no
login authentication {default | list-name}
no login authentication

default                  Login
list-name                  Login

```

```

                    Login
                    Login
                                Login
                                Login
                                Login
                                Login
list-1  AAA Login

```

VTY 0 - 4

```

Ruijie(config)# aaa authentication login list-1 local
Ruijie(config)# line vty 0 4
Ruijie(config-line)# login authentication list-1

```

<b>aaa new-model</b>	AAA
<b>username</b>	
<b>login authentication</b>	Login

## 42.2

- **aaa authorization commands**
- **aaa authorization config-commands**
- **aaa authorization console**
- **aaa authorization exec**
- **aaa authorization network**
- **authorization commands**
- **authorization exec**

## **42.2.1 aaa authorization commands**

NAS	CLI	AAA
	<b>aaa authorization commands</b>	no

AAA

14

14

no

Ruijie(config)# **aaa authorization config-commands**

<b>aaa new-model</b>	AAA
<b>aaa authorization commands</b>	AAA

### 42.2.3 aaa authorization console

AAA

**aaa authorization console**

no

AAA

**aaa authorization console**

**no aaa authorization console**

Ruijie(config)# **aaa authorization console**





RADIUS

RADIUS


RADIUS

RADIUS

RADIUS

RADIUS

```
Ruijie(config)# aaa authorization network default group  
radius
```



**aaa new-model**

"

cmd 15  
TACACS+ none  
VTY 0 – 4

```
Ruijie(config)# aaa authorization commands 15 cmd group tacacs+ none
```

```
Ruijie(config)# line vty 0 4
```

```
Ruijie(config-line)# authorization commands 15 cmd
```

<b>aaa new-model</b>	AAA
<b>aaa authorization commands</b>	AAA

## 42.2.7 authorization exec

Exec  
**authorization exec** no Exec

**authorization exec** {**default** | *list-name*}

**no authorization exec**

**default** Exec

*list-name* Exec

AAA Exec

Exec  
Exec



*level* 0~15

**default**

*list-name*

*method* 4





<b>aaa new-model</b>	AAA
<b>aaa authentication</b>	AAA
<b>accounting commands</b>	Exec

### 42.3.3 aaa accounting network

```
aaa accounting network no
```

```
aaa accounting network {default | list-name} start-stop group radius
```

```
no aaa accounting network {default | list-name}
```

```
network DOT1X PPP
```

```
resource
```

```
list-name
```

```
start-stop
```

```
group
```

```
radius RADIUS
```

```
start-stop
```

```
RADIUS
```

```
Ruijie(config)# aaa accounting network default
start-stop group radius
```

AAA

---



**aaa new-model**

AAA

## 42.3.5 aaa accounting update periodic

```

aaa accounting update
periodic no

```

```

aaa accounting update periodic interval
no aaa accounting update periodic

```

```

interval 1

```

```

5 minutes

```

AAA

AAA

1

```

Ruijie(config)# aaa new-model
Ruijie(config)# aaa accounting update
Ruijie(config)# aaa accounting update periodic 1

```

aaa new-model	AAA
aaa accounting network	

## 42.3.6 accounting commands

```

accounting commands no
accounting commands level {default | list-name}
no accounting commands level

```

*level*

0~15

**default**

*list-name*

*list-name*

Exec

Exec

Exec

Exec

Exec

exec-1 Exec

RADIUS

none

VTY

0 – 4

```
Ruijie(config)# aaa accounting exec exec-1 group radius none
```

```
Ruijie(config)# line vty 0 4
```

```
Ruijie(config-line)# accounting exec exec-1
```

<b>aaa new-model</b>	AAA
<b>aaa accounting commands</b>	AAA Exec

## 42.4 AAA

- **aaa group server**
- **ip vrf forwarding**
- **server**
- **show aaa group**

### 42.4.1 aaa group server

AAA

no

```
aaa group server {radius | tacacs+} name
```



## vrf

```
Ruijie(config)# aaa group server radius ss  
Ruijie(config-gs-radius)# server 192.168.4.12  
Ruijie(config-gs-radius)# server 192.168.4.13  
Ruijie(config-gs-radius)# ip vrf forwarding vrf-name  
Ruijie(config-gs-radius)# end
```

<b>aaa group server</b>	aaa
<b>show aaa group</b>	aaa

```
Ruijie(config)# aaa group server radius ss
Ruijie(config-gs-radius)# server 192.168.4.12
acct-port 5 auth-port 6
Ruijie(config-gs-radius)# end
Ruijie# show aaa group
Group Name: ss
Group Type: radius
Referred: 2
Server List:
IP Address: 192.168.4.12
Authentication Port: 6
Accounting Port: 5
Referred: 1
```

Referred: 2  
Server List:  
IP Address: 192.168.217.64  
Authentication Port: 1812  
Accounting Port: 1813  
Referred: 1

<b>aaa group server</b>	AAA

## 42.5 AAA

- **aaa local authentication attempts**
- **aaa local authentication lockout-time**
- **aaa new-model**
- **clear aaa local user lockout**
- **debug aaa**
- **show aaa method-list**
- **show aaa user lockout**

### 42.5.1 aaa local authentication attempts

login

**aaa local authentication attempts** *max-attempts*

*max-attempts*

1~2147483647

3

Login

Ruijie# **configure terminal**

```
Ruijie(config)# aaa local authentication attempts 6
```

<b>show running-config</b>	
<b>show aaa lockout</b>	login

## 42.5.2 aaa local authentication lockout-time

```
login
```

```
aaa local authentication lockout-time lockout-time
```

```
lockout-time
```

```
1~2147483647
```

```
15
```

```
login
```

```
Ruijie# configure terminal
```

```
Ruijie(config)# aaa local authentication lockout-time
```

```
5
```

<b>show running-config</b>	
<b>show aaa lockout</b>	login

## 42.5.3 aaa new-model

```
AAA
```

```
aaa new-model
```

AAA           **no**           AAA

**aaa new-model**  
**no aaa new-model**

AAA

                AAA    AAA  
**aaa new-model**           AAA    AAA           AAA

AAA

Ruijie(config)# **aaa new-model**

<b>aaa authentication</b>	
<b>aaa authorization</b>	
<b>aaa accounting</b>	

#### 42.5.4 clear aaa local user logout

**clear aaa local user logout** {all | **user-name** <word>}

<word>           ID

```
Ruijie# clear aaa local user lockout all
```

<b>show running-config</b>	
<b>show aaa lockout</b>	login

### 42.5.5 debug aaa

AAA

no

**debug aaa event**

**no debug aaa event**

EXEC

### 42.5.6 show aaa method-list

AAA

**show aaa method-list**

## AAA

## AAA

```
Ruijie# show aaa method-list
Authentication method-list
aaa authentication login default group radius
aaa authentication ppp default group radius
aaa authentication dot1x default group radius
aaa authentication dot1x san-f local group angel group
rain none
aaa authentication enable default group radius
Accounting method-list
aaa accounting network default start-stop group radius
Authorization method-list
aaa authorizing network default group radius
```

<b>aaa authentication</b>	
<b>aaa authorization</b>	
<b>aaa accounting</b>	

### 42.5.7 show aaa user logout

```
show aaa user logout {all | user-name <word>}
```

```
<word>      ID
```

```
Ruijie# show aaa user logout all
```

<b>show running-config</b>	
<b>show aaa lockout</b>	login



```
radius fastEthernet 0/0 ip
radius
Ruijie(config)#
```

<b>radius-server host</b>	RADIUS

### 43.1.3 radius-server host

RADIUS

**radius-server**

**no**

RADIUS

**radius-server host** { *ip-address* } [**auth-port** *port-number*] [**acct-port** *port-number*]

**no radius-server host** { *ip-address* }

*ip-address*: RADIUS IP

*auth-port*: RADIUS UDP

*port-number*: RADIUS UDP 0

*acct-port*: Radius UDP

*port-number*: RADIUS UDP 0

RADIUS

RADIUS AAA

RADIUS

**radius-server**

RADIUS

RADIUS

Ruijie(config)# **radius-server host** 192.168.12.1

<b>aaa authentication</b>	AAA

<b>radius-server key</b>	RADIUS
<b>radius-server retransmit</b>	RADIUS
<b>radius-server timeout</b>	RADIUS

### 43.1.4 radius-server key

RADIUS  
**radius-server key** no

**radius-server key [0|7]** *text-string*

**no radius-server key**

*text-string*

RADIUS RADIUS  
RADIUS RADIUS

RADIUS aaa

Ruijie(config)# **radius-server key aaa**

<b>radius-server host</b>	RADIUS
<b>radius-server retransmit</b>	RADIUS
<b>radius-server timeout</b>	RADIUS

RADIUS

**radius-server retransmit****no****radius-server retransmit** *retries***no radius-server retransmit***retries* RADIUS

3

AAA

RADIUS

4

Ruijie(config)# **radius-server retransmit 4**

<b>radius-server host</b>	RADIUS
<b>radius-server key</b>	RADIUS
<b>radius-server timeout</b>	RADIUS

### 43.1.6 radius-server timeout

RADIUS

**radius-server timeout****no****radius-server timeout** *seconds***no radius-server timeout***seconds*

1-1000

RADIUS

---

5

```
Ruijie(config)# radius-server deadtime 10
```

radius-server host	RADIUS
radius-server retransmit	RADIUS
radius-server key	RADIUS
radius-server timeout	RADIUS

### 43.1.8 radius attribute

**radius attribute**{*id* | down-rate-limit | dscp | mac-limit | up-rate-limit}  
vendor-type *type*

**no radius attribute** {*id* | down-rate-limit | dscp | mac-limit |  
up-rate-limit} vendor-type

*id* id <1-255>

*type* type

id		type
1	max down-rate	1
2	qos	2
3	user ip	3
4	vlan id	4
5	version to client	5
6	net ip	6
7	user name	7
8	password	8
9	file-diractory	9
10	file-count	10
11	file-name-0	11

12	file-name-1	12
13	file-name-2	13
14	file-name-3	14
15	file-name-4	15
16	max up-rate	16
17	version to server	17
18	flux-max-high32	18
19	flux-max-low32	19
20	proxy-avoid	20
21	dailup-avoid	21
22	ip privilige	22
23	login privilige	42

<b>id</b>		<b>type</b>
1	max down-rate	76
2	qos	77
3	user ip	3
4	vlan id	4
5	version to client	5
6	net ip	6
7	user name	7
8	password	8
9	file-diractory	9
10	file-count	10
11	file-name-0	11
12	file-name-1	12
13	file-name-2	13
14	file-name-3	14
15	file-name-4	15

16	max up-rate	75
17	version to server	17
18	flux-max-high32	18
19	flux-max-low32	19
20	proxy-avoid	20
21	dailup-avoid	21
22	ip privilege	22
23	login privilege	42
24	limit to user number	50

max up-rate 211

Ruijie(config)# radius attribute 16 vendor-type 211

radius set qos cos	radius qos cos

### 43.1.9 radius set qos cos

radius qos cos

**radius set qos cos**

**no radius set qos cos**

qos dscp

qos            cos            dscp

Ruijie(config)# **radius set qos cos**

<b>radius vendor-specific extend</b>	Radius id

### 43.1.10 radius vendor-specific extend

id

**radius vendor-specific extend**

**no radius vendor-specific extend**

id

id

Ruijie(config)# **radius vendor-specific extend**

<b>radius attribute</b>	
<b>radius set</b>	qos            cos

## 43.2 RADIUS



---

<b>radius-server host</b>	RADIUS
<b>radius-server retransmit</b>	RADIUS
<b>radius-server key</b>	RADIUS
<b>radius-server timeout</b>	RADIUS

### 43.2.4 show radius vendor-specific

RADIUS

**show radius vendor-specific**

radius

```
Ruijie# show radius vendor-specific
id      vendor-specific      type-value
-----
1       max down-rate        76
2       qos                   77
3       user ip              3
4       vlan id              4
5       version to client    5
6       net ip               6
7       user name            7
8       password             8
9       file-directory       9
10      file-count           10
11      file-name-0          11
12      file-name-1          12
13      file-name-2          13
14      file-name-3          14
15      file-name-4          15
16      max up-rate          75
```

## RADIUS

---

17	version to server	17
18	flux-max-high32	18
19	flux-max-low32	19
20	proxy-avoid	20
21	dailup-avoid	21
22	ip privilige	22
23	login privilige	42
24	limit to user number	50



# 44 TACACS+

## 44.1 TACACS+

TACACS+

- **aaa group server tacacs+**
- **server(TACACS+)**
- **ip vrf forwarding(TACACS+)**
- **ip tacacs source-interface**
- **tacacs-server host**
- **tacacs-server key**
- **tacacs-server timeout**

### 44.1.1 aaa group server tacacs+

TACACS+

TACACS+

```
aaa group server tacacs+ group-name  
no aaa group server tacacs+ group-name
```

```
group-name TACACS+
```

TACACS+

TACACS+

```
tac1 TACACS+  
1.1.1.1 TACACS+
```

```
Ruijie(config)# aaa group server tacacs+ tac1  
Ruijie(config-gs-tacacs)#server 1.1.1.1
```

<b>server</b>	TACACS+	server
<b>ip vrf forwarding</b>	TACACS+	VRF

#### 44.1.2 server(TACACS+)

TACACS+

```
server ip-address
no server ip-address
```

```
ip-address TACACS+
```

TACACS+

```
aaa group server tacacs+ TACACS+
```

```
TACACS+
tacacs-server host
```

TACACS+

```
tac1 TACACS+
1.1.1.1 TACACS+
```

```
Ruijie(config)# aaa group server tacacs+ tac1
Ruijie(config-gs-tacacs)# server 1.1.1.1
```

<b>aaa group server tacacs+</b>	TACACS+	
<b>ip vrf forwarding</b>	TACACS+	VRF

### 44.1.3 ip vrf forwarding(TACACS+)

```

TACACS+
)
ip vrf forwarding vrf-name
no ip vrf forwarding

vrf-name vrf

```

TACACS+

```

TACACS+ vrf

TACACS+ VRF vpn1
Ruijie(config)# aaa group server tacacs+ tac1
Ruijie(config-gs-radius)# server 1.1.1.1
Ruijie(config-gs-radius)# ip vrf forwarding vpn1

```

<b>aaa group server tacacs+</b>	TACACS+
<b>server</b>	TACACS+ server

### 44.1.4 ip tacacs source-interface

```

TACACS+

ip tacacs source-interface interface
no ip tacacs source-interface

Interface TACACS+

```

TACACS+

```

TACACS+          nas
TACACS+          ip
TACACS+

```

```

TACACS+          fastEthernet 0/0      ip
TACACS+

```

```

Ruijie(config)# ip tacacs source-interface
fastEthernet 0/0

```

<b>tacacs-server host</b>	TACACS+
<b>ip address</b>	ip

#### 44.1.5 tacacs-server host

```

TACACS+          IP

```

```

tacacs-server host ip-address [port integer] [timeout integer] [key
[0 | 7]string]

```

```

no tacacs-server host ip-address

```

```

ip-address      TACACS+          IP
port integer   TACACS+          TCP
timeout integer TACACS+
key string     TACACS+ client
0 | 7           0           7

```

TACACS+

TACACS+ AAA  
**tacacs-server**

TACACS+  
TACACS+

TACACS+

Ruijie(config)# **tacacs-server host 192.168.12.1**

<b>aaa authentication</b>	AAA
<b>tacacs-server key</b>	TACACS+
<b>tacacs-server timeout</b>	TACACS+

### 44.1.6 tacacs-server key

TACACS+

**tacacs-server key [0 | 7] string**

**no tacacs-server key**

*string*

0 | 7                      0              7

TACACS+

TACACS+

TACACS+

host              key  
key                      key

TACACS+

aaa

Ruijie(config)#**tacacs-server key aaa**

<b>tacacs-server host</b>	TACACS+
<b>tacacs-server timeout</b>	TACACS+

### 44.1.7 tacacs-server timeout

TACACS+

**tacacs-server timeout** *seconds*

**no tacacs-server timeout**

*seconds*

1-1000

5

host

timeout

timeout

timeout

10

Ruijie(config)# **tacacs-server timeout** 10

<b>tacacs-server host</b>	TACACS+
<b>tacacs-server key</b>	TACACS+

## 44.2 TACACS+

- **debug tacacs+**
- **show tacacs**

### 44.2.1 debug tacacs+

```
TACACS+          no          TACACS+
debug tacacs+
no debug tacacs+
```

EXEC

### 44.2.2 show tacacs

```
TACACS+
show tacacs
```

TACACS+

```
Ruijie# show tacacs
Tacacs+ Server : 172.19.192.80/49
Socket Opens: 0
Socket Closes: 0
Total Packets Sent: 0
Total Packets Recv: 0
Reference Count: 0
```

<b>tacacs-server host</b>	TACACS+

# 45 SSH

## 45.1 SSH

SSH

- **crypto key generate**
- **crypto key zeroize**
- **ip ssh version**
- **ip ssh time-out**
- **ip ssh authentication-retries**

### 45.1.1 crypto key generate

**crypto key generate {rsa | dsa}**

<b>rsa</b>	RSA
<b>dsa</b>	DSA

SSH Server

```
SSH Server          SSH
enable service ssh-server  SSH Server
SSH 1  RSA  SSH 2  RSA  DSA
      RSA  SSH1  SSH2
DSA          SSH2
```



```
Ruijie# configure terminal
Ruijie(config)# crypto key zeroize rsa
```

<b>show ip ssh</b>	SSH Server
<b>crypto key generate {rsa dsa}</b>	DSA RSA

RGOS10.1

### 45.1.3 ip ssh version

SSH server no

```
ip ssh version {1 / 2}
no ip ssh version
```

<b>1</b>	SSH Server	SSH1
<b>2</b>	SSH Server	SSH2

```
SSH SSH 1 2
SSH no ip ssh version
```

```
SSH Server SSH
SSH Server SSH1 SSH2 SSH 1
SSH 2 1 2
SSH show ip ssh SSH Serv
er
```

2

```
Ruijie# configure terminal
Ruijie(config)# ip ssh version 2
```

<b>show ip ssh</b>	SSH Server

RGOS10.1

#### 45.1.4 ip ssh time-out

SSH Server **no**

```
ip ssh time-out time
no ip ssh time-out
```

<i>time</i>	

**time-out** 120s **no ip ssh**

```
SSH Server
120s
show ip ssh SSH server
```

100s

```
Ruijie# configure terminal
Ruijie(config)# ip ssh time-out 100
```

--	--

<b>show ip ssh</b>	ssh-server
--------------------	------------

RGOS10.1

### 45.1.5 ip ssh authentication-retries

SSH Server

no

**ip ssh authentication-retries** *retry times*

**no ip ssh authentication-retries**

<i>retry times</i>	

3

**no ip ssh****authentication-retries**

SSH Server

SSH Server

**ip ssh**

SSH Server

**show**

2

Ruijie# **configure terminal**Ruijie(config)# **ip ssh ssh authentication-retries 2**

<b>show ip ssh</b>	SSH Server

RGOS10.1

## 45.2 SSH

SSH

- **show ip ssh**
- **show ssh**
- **show crypto key mypubkey**
- **disconnect ssh**

### 45.2.1 show ip ssh

SSH Server

**show ip ssh**

SSH Server  
Server

SSH

SSH

SSH

Ruijie# **show ip ssh**

<b>ip ssh version {1   2}</b>	SSH Server
<b>ip ssh time-out time</b>	SSH Server
<b>ip ssh authentication-retries retry times</b>	SSH Server

RGOS10.1

### 45.2.2 show ssh

SSH

**show ssh**

SSH

VTY

SSH

Ruijie# **show ssh**

RGOS10.1

### 45.2.3 show crypto key mypubkey

SSH Server

**show crypto key mypubkey {rsa/dsa}**

rsa	RSA
dsa	DSA

## SSH Server

```
Ruijie# show crypto key mypubkey rsa
```

<code>crypto key generate {rsa   dsa}</code>	DSA RSA

RGOS10.1

#### 45.2.4 disconnect ssh

## SSH

```
disconnect ssh [vty] session-id
```

<i>session-id</i>	SSH

VTY SSH

SSH SSH SSH

```
Ruijie# disconnect ssh 1  
Ruijie# disconnect ssh vty 1
```

<b>show ssh</b>	SSH
<b>Clear line vty <i>line_number</i></b>	VTY

RGOS10.1

## 46 CPU

### 46.1

- **cpu-protect type** *packet-type* **traffic-class** *traffic-class-num*
- **cpu-protect traffic-class id** *id\_num* **bandwidth** *bandwidth\_value*
- **cpu-protect traffic-class all** **bandwidth** *bandwidth\_value*
- **cpu-protect cpu** **bandwidth** *bandwidth\_value*
- **cpu-protect mac-address storm-control enable** *value*

#### 46.1.1 cpu-protect type packet-type traffic-class

##### *traffic-class-num*

```
cpu-protect type { bpdu | arp | igmp | dot1x | gvrp | dhcp | unicast |
multicast | broadcast | error_ttl | other} traffic-class
traffic-class-num
```

```
traffic-class-num          id          0 7
```

```
show cpu-protect
```

```
CPU    BPDU
```

```
Ruijie(config)# cpu-protect type bpdu traffic-class 5
Ruijie(config)# end
Ruijie # show cpu-protect type bpdu traffic-class
%*****packet type      traffic-class*****
                bpdu          5
```



<b>cpu-protect traffic-class id</b> <i>id_num bandwidth</i> <i>bandwidth_value</i>	
<b>cpu-protect traffic-class all</b> <b>bandwidth</b> <i>bandwidth_value</i>	
<b>cpu-protect cpu bandwidth</b> <b>bandwidth_value</b>	CPU

## 46.1.2 cpu-protect traffic-class id *id\_num* bandwidth

### *bandwidth\_value*

**cpu-protect traffic-class id** *id\_num* **bandwidth** *bandwidth\_value*

*id\_num* ID 0 7

*bandwidth\_value* 32 131072(kbps)

show cpu-protect

7 312(kbps)

```
Ruijie#configure terminal
Ruijie(config)#  cpu-protect  traffic-class  id  7
bandwidth 312
Ruijie(config)#end
Ruijie# show cpu-protect traffic-class id 7
%*****traffic class      bandwidth(kbps)*****
              7              312
```

<b>cpu-protect type</b> <i>packet-type</i> <b>traffic-class</b> <i>traffic-class-num</i>	
<b>cpu-protect traffic-class all</b> <b>bandwidth</b> <i>bandwidth_value</i>	

<b>cpu-protect</b> <b>cpu</b> <b>bandwidth</b> <b>bandwidth_value</b>	CPU
--	-----

### 46.1.3 cpu-protect traffic-class all bandwidth *bandwidth\_value*

**cpu-protect traffic-class id** *id\_num* **bandwidth** *bandwidth\_value*

*bandwidth\_value* 32 131072(kbps)

show cpu-protect

312(kbps)

```
Ruijie#configure terminal
Ruijie(config)# cpu-protect traffic-class all
bandwidth 312
Ruijie(config)#end
```

<b>cpu-protect type</b> <i>packet-type</i> <b>traffic-class</b> <i>traffic-class-num</i>	
<b>cpu-protect traffic-class id</b> <i>id_num</i> <b>bandwidth</b> <i>bandwidth_value</i>	

### 46.1.4 cpu-protect cpu bandwidth *bandwidth\_value*

CPU

**cpu-protect cpu bandwidth** *bandwidth\_value*

*bandwidth\_value* 64 1000000(kbps)

show cpu-protect

CPU 2000 kbps

```
Ruijie#configure terminal
Ruijie(config)#cpu-protect cpu bandwidth 2000
Ruijie(config)#end
Ruijie#show cpu-protect cpu
%cpu port bandwidth: 2000(kpbs)
```

<b>cpu-protect type</b> <i>packet-type</i> <b>traffic-class</b> <i>traffic-class-num</i>	
<b>cpu-protect traffic-class id</b> <i>id_num</i> <b>bandwidth</b> <i>bandwidth_value</i>	
<b>cpu-protect traffic-class all</b> <b>bandwidth</b> <i>bandwidth_value</i>	

## 46.2

CPU

- **show cpu-protect type** *packet-type*
- **show cpu-protect traffic-class id** *id\_num*
- **show cpu-protect traffic-class all**
- **show cpu-protect cpu**

### 46.2.1 show cpu-protect type packet-type

**show cpu-protect type** *packet-type*

**show cpu-protect type all**

```

%*****packet type      traffic-class*****
      bpdu                6
      arp                  5
      igmp                 3
      dot1x                3
      gvrp                 3
      dhcp                 2
      unicast              4
      multicast            1
      broadcast            0
      error_ttl            0
      co-operate           6
      other                 0

```

<b>show cpu-protect traffic-class</b>	
<b>id id_num</b>	id_num            0 7
<b>show cpu-protect traffic-class</b>	
<b>all</b>	
<b>show cpu-protect cpu</b>	CPU

**46.2.2 show cpu-protect traffic-class id id\_num**

```
show cpu-protect traffic-class id id_num
```

```
id_num            0-7
```

## 1 CPU

```
Ruijie#show cpu-protect traffic-class id 1
```

```
%*****traffic class      bandwidth(kbps)*****
          1                1000
```

<b>show cpu-protect type</b> <i>packet-type</i>	
<b>show cpu-protect traffic-class</b> <b>all</b>	
<b>show cpu-protect cpu</b>	CPU

## 46.2.3 show cpu-protect traffic-class all

```
show cpu-protect traffic-class all
```

## show cpu-protect traffic-class all

```
Ruijie# show cpu-protect traffic-class all
```

```
%*****traffic class      bandwidth(kbps)*****
          0                1000
          1                1000
          2                1000
          3                1000
          4                1000
          5                1000
          6                1000
          7                100000
```

--	--

<b>show cpu-protect type</b> <i>packet-type</i>	
<b>show cpu-protect traffic-class</b> <b>id</b> <i>id_num</i>	id_num                    0 7
<b>show cpu-protect cpu</b>	CPU

#### 46.2.4 show cpu-protect cpu

CPU  
**show cpu-protect cpu**

CPU

CPU

Ruijie# **show cpu-protect cpu**  
 %cpu port bandwidth: 100000(kbps)

<b>show cpu-protect type</b> <i>packet-type</i>	
<b>show cpu-protect traffic-class</b> <b>id</b> <i>id_num</i>	id_num                    0 7
<b>show cpu-protect traffic-class</b> <b>all</b>	



---

Show system-guard	

### 47.1.2 system-guard isolate-time seconds

no

**system-guard isolate-time** *seconds*

**no system-guard isolate-time**

<i>seconds</i>	IP 3600	<i>second</i> 120	30

120

IP second

IP

100

Ruijie(config-if)# **system-guard isolate-time 100**

---

**system-guard same-dest-ip-attack-packets** *number*  
**no system-guard same-dest-ip-attack-packets**

<i>number</i>		IP 0	IP 2000
	20	0	

20

100

Ruijie(config-if)# **system-guard**  
**same-dest-ip-attack-packets** 100

<b>system-guard enable</b>	

#### 47.1.4 system-guard scan-dest-ip-attack-packets *number*

IP

**no**

**system-guard scan-dest-ip-attack-packets** *number*

---

<i>number</i>	IP		
	0	1000	10
	0		

10

100

```
Ruijie(config-if)# system-guard
scan-dest-ip-attack-packets 100
```

<b>system-guard enable</b>	

#### 47.1.5 system-guard detect-maxnum *number*

**no**

**system-guard detect-maxnum** *number*

**no system-guard detect-maxnum**

<i>num</i>	IP		
	1	500	10
	0		

100

---

/20

200

Ruijie(config)# **system-guard detect-maxnum 200**



**system-guard enable** **Trf0TD-5086 0 TD0 4572714 Tc049b7472135424c06**

---

```
Ruijie(config-if)# system-guard exception
192.168.5.145 255.255.255.0
```

<b>system-guard enable</b>	

### 47.1.7 clear system-guard [interface interface-id [ip-address ip-address]]

IP

```
clear system-guard [interface interface-id [ip-address] ]
```

<b>interface interface-id</b>	
<b>ip-address ip-address</b>	IP

Fastethernet 0/1

IP

```
Ruijie(config)# clear system-guard interface
fastethernet 0/1
```

<b>system-guard enable</b>	

## 47.2

- **show system-guard [interface *interface-id*]**
- **show system-guard isolate-ip [interface *interface-id*]**
- **show system-guard detect-ip [interface *interface-id*]**
- **show system-guard exception-ip**

## 47.2.1 show system-guard [interface *interface-id*]

**show system-guard [interface *interface-id*]**

<b>interface <i>interface-id</i></b>	

```
Ruijie# show system-guard
detect-maxnum number   : 100      //
isolated host number   : 11        //
inteface state isolate time same-attack-pkts
scan-attack-pkts
-----
Fa 0/1  ENABLE    120      20      10
Fa 0/2  DISABLE   110      21      11
.....
Ruijie# show system-guard interface Fa 0/1
detect-maxnum number   : 100      //
isolated host number   : 11        //
inteface state isolate time same-attack-pkts
scan-attack-pkts
-----
Fa 0/1  ENABLE    120      20      10
```

---

<b>system-guard enable</b>	

## 47.2.2 show system-guard isolate-ip [interface interface-id]

IP

**show system-guard isolate-ip [interface *interface-id*]**

<b>interface <i>interface-id</i></b>	

```
Ruijie# show system-guard isolated-ip
interface  ip-address      isolate reason
remain-time(second)
-----
Fa 0/1    192.168.5.119  scan ip attack    110
Fa 0/1    192.168.5.109  same ip attack    61
```

<b>system-guard enable</b>	

---

<b>interface</b> <i>interface-id</i>	
--------------------------------------	--

```
Ruijie# show system-guard detect-ip  
interface ip-address same ip attack packets scan ip  
attack packets
```

```
-----
```

Fa 0/1	192.168.5.118	0	8
Fa 0/1	192.168.5.108	12	2

--	--





RGOS10.1

## 48.1.2 security community

smp

**security** { [ v1 | v2 ] **community** *community* | v3 **user** *username* }**no security** { [ v1 | v2 ] **community** *community* | v3 **user** *username* }*community* *community**username* v3v3 , v3 **snmp-server**  
SNMP

v1 community

Ruijie(config)# **security v1 community public**

v3 start

Ruijie(config)# **security v3 user start**

RGOS10.1

## 48.1.3 smp-server host

smp-server ip

**smp-server host** *ip-address***no smp-server host**

*ip-address*    smp server    ip

smp server

**show smp-server**

Ruijie(config)#**smp-server host 192.168.4.243**

<a href="#">show smp-server</a>	smp server

RGOS10.1

### 48.1.4 security event interval

**security event interval** *interval*

**no security event interval**

*interval*

5s

**show security event interval**

Ruijie(config)# **security event interval 10**

<a href="#">show</a> security event interval	

RGOS10.1

### 48.1.5 security address-bind enable

**security address-bind enable**  
**no security address-bind enable**

AP AP

GSN

Ruijie(config-if)# **security address-bind enable**

<b>security gsn enable</b>	GSN

RGOS10.1

## 48.2

**show smp-server**  
**show security event interval**

### 48.2.1 show smp-server

smp server IP

smp server IP

```
Ruijie# show smp-server  
SMP-Server IP 192.168.20.30
```

<b>smp-server host</b>	smp server ip

RGOS10.1

### 48.2.2 show security event interval



## 49 DAI

### 49.1 VLAN DAI

- ip arp inspection vlan

#### 49.1.1 ip arp inspection vlan vlan-id

```

no          vlan-id          VLAN DAI
          vlan-id          VLAN DAI
          vlan-id          VLAN DAI

```

**ip arp inspection vlan *vlan-id***

**no ip arp inspection vlan [*vlan-id*]**

<i>vlan-id</i>	vlan

VLAN DAI

DAI

VLAN 1 ARP

Ruijie(config)# **ip arp inspection**

Ruijie(config)# **ip arp inspection vlan 1**

<b>show ip arp inspection vlan</b>	VLAN DAI

## 49.2

### 49.2.1 ip arp inspection trust

```
trust          no          ip arp inspection
ip arp inspection trust
no ip arp inspection trust
```

```
ARP          DAI          ARP
```

```
gigabitEthernet 0/19
```

```
Ruijie(config)# interface gigabitEthernet 0/19
Ruijie(config-if)# ip arp inspection trust
```

- ip arp inspection limit-rate

### 49.3.1 ip arp inspection limit-rate limit-rate

```

                                ARP                                ip arp
inspection limit-rate          no
ip arp inspection limit-rate {limit-rate | none }
no ip arp inspection limit-rate
    
```

none	
limit-rate	1 2048

```

                                15 ARP /
0
    
```

DAI  
(Network Foundation Protection Policy)

```

                                VLAN 2          gigabitEthernet 0/2
10 ARP /

Ruijie(config)# ip arp inspection
Ruijie(config)# interface gigabitEthernet 0/2
Ruijie(config-if)# ip arp inspection limit-rate 10
    
```

## 49.4 DHCP Snooping

```

                                VLAN          DAI          ARP
                                DHCP Snooping  DHCP Snooping  DHCP Snooping
    
```

# 50 IP Source Guard

## 50.1 IP Source Guard

IP Source Guard

- **ip source binding**

### 50.1.1 ip source binding

**no**

**[no] ip source binding** *mac-address* **vlan** *vlan-id* *ip-address* **interface** *interface-id*

<i>mac-address</i>	MAC
<i>vlan-id</i>	vlan id
<i>ip-address</i>	IP
<i>interface-id</i>	

```
Ruijie# configure terminal
Ruijie(config)# ip source binding 00d0.f801.0101 vlan
1 192.168.4.243 interface fastEthernet 0/1
Ruijie(config)# end
Ruijie# show ip source binding
MacAddress IpAddress Lease(sec) Type VLAN
Interface
-----
```

```
00d0.f801.0101 192.168.4.243 infinite static 1
FastEthernet 0/1
Total number of bindings: 1
```

<b>show ip source binding</b>	IP

## 50.2 IP Source Guard

IP Source Guard

- **ip verify source**

### 50.2.1 ip verify source

```

IP Source Guard
no IP Source Guard
[no] ip verify source [port-security]
port-security IP Source Guard IP + MAC

```

```

IP IP Source Guard
IP + MAC
DHCP Snooping
fastEthernet 0/1 IP Source Guard
Ruijie# configure terminal
Ruijie(config)# interface fastEthernet 0/1
Ruijie(config-if)# ip verify source
Ruijie(config-if)# end
Ruijie# show ip verify source

```



**inactive-trust-port**

DHCP Snooping

**active**

DHCP Snooping

```

Ruijie # show ip verify source
Interface          Filter-type          Filter-mode
Ip-address Mac-address  VLAN
-----
FastEthernet 0/1  ip          active          192.168.4.243
00d0.f801.0101 1

```

<b>ip verify source</b>	IP Source Guard

### 50.3.2 show ip source binding

IP

```

show ip source binding [ip-address] [mac-address]
[dhcp-snooping] [static] [vlan vlan-id] [interface interface-id]

```

```

ip-address          ip
mac-address         mac
dhcp-snooping
static
vlan-id             vlan
interface-id

```

IP

```
Ruijie#show ip source binding
MacAddress      IpAddress      Lease(sec)    Type
VLAN  Interface
-----
00d0.f801.0101  192.168.4.243  infinite     static
1  FastEthernet 0/1
Total number of bindings: 1
```

<b>ip source binding</b>	

### 50.3.3 debug ip source bind

IP Source Guard

**debug ip source bind**

IP Source Guard

IP Source Guard

```
Ruijie# debug ip source bind
```

# 51 ACL

id	IP ACL: 1-99,1300-1999 IP ACL: 100-199,2000-2699 MAC ACL: 700-799 ACL: 2700-2899
name	ACL
sn	ACL ( )
start-sn	
inc-sn	
deny	
permit	
prot	IPv6 ipv6, icmp, tcp, udp 0-255 IPv4 eigrp, gre, ipinip, igmp, nos, ospf, icmp, udp, tcp, ip IP 0-255 icmp/tcp/udp
interface idx	
src	
src-wildcard	0.255.0.32
src-ipv6-pfix	IPv6
dst-ipv6-pfix	IPv6
pfix-len	
src-ipv6-addr	IPv6
addr	IPv6
dscp dscp	, 0-63
flow-label flow-label	0-1048575
dst	
dst-wildcard	0.255.0.32

fragment	
precedence precedence	0-7
time-range tm-rng-name	tm-rng-name
tos tos	0-15
cos cos	cos (0-7)
cos inner cos	tag cos
icmp-type	ICMP 0-255
icmp-code	ICMP 0-255
icmp-message	ICMP
operator port[port]	Operator lt- eq- gt- neq- range- port
src-mac-addr	
dst-mac-addr	
VID vid	vlan id
VID inner vid	tag vid
ethernet-type	0x

---

C		12	Q	IP	36
D	VLAN tag	14	R	ip	38
E	DSAP( )	18	S	ip	42
F	SSAP( )	19	T	TCP	46
G	Ctrl	20	U	TCP	48
H	Org Code	21	V		50
I		24	W		54
J	IP	26	XY	IP	58

- ip access-group
- mac access-group
- expert access-group
- ipv6 traffic-filter

### 51.1.1 access-list

no

1) IP 1 - 99 1300 - 1999

**access-list** *id* {deny | permit} {*source source-wildcard* | **host** *source* | **any**}

2) IP 100 - 199 2000 - 2699

**access-list** *id* {deny | permit} **protocol** {*source source-wildcard* | **host** *source* | **any**} {*destination destination-wildcard* | **host** *destination* | **any**} [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

3) MAC 700 - 799

**access-list** *id* {deny | permit} {**any** | **host** *source-mac-address*} {**any** | **host** *destination-mac-address*} [*ethernet-type*][**cos** [*out*][**inner** *in*]]

4) Expert 2700 - 2899

**access-list** *id* {deny | permit} [**protocol** | [*ethernet-type*][**cos** [*out*]]5.0(26)710(19)9(

*destination-mac-address* | **any**} [**precedence** *precedence*] [**tos** *tos*]  
[**fragments**] [**time-range** *time-range-name*]

Expert



- **urg**
- **ack**
- **psh**
- **rst**
- **syn**
- **fin**
  
- **ACL**

- information-request
- mask-reply
- mask-request
- mobile-redirect
- net-redirect
- net-tos-redirect
- net-tos-unreachable
- net-unreachable
- network-unknown
- no-room-for-option
- option-missing
- packet-too-big
- parameter-problem
- port-unreachable
- precedence-unreachable
- protocol-unreachable
- redirect
- router-advertisement
- router-solicitation
- source-quench
- source-route-failed
- time-exceeded
- timestamp-reply
- timestamp-request
- ttl-exceeded
- unreachable

TCP

TCP

- bgp
- chargen
- cmd
- daytime
- discard
- domain
- echo
- exec
- finger
- ftp

- ftp-data
- gdfher p - d a t a t f t p - d a t a p

72130c309b709e12fc4020

- pim-auto-rp
- rip
- snmp
- snmptrap
- sunrpc
- syslog
- tacacs
- talk
- tftp
- time
- who
- xdmcp

## Ethernet-type

- aarp
- appletalk
- decnet-iv
- diagnostic
- etype-6000
- etype-8042
- lat
- lavc-sca
- mop-console
- mop-dump
- mumps
- netbios
- vines-echo
- xns-idp

1) IP

IP 192.168.1.64 - 192.168.1.127

```
Ruijie(config)# access-list 1 permit 192.168.1.64  
0.0.0.63
```

2) IP

IP DNS ICMP



**ip access-list {extended | standard} {id | name}**  
**no ip access-list {extended | standard} {id | name}**

*id* IP 1-99 1300-1999 100-199  
 2000-2699  
*name* IP

ACL deny permit ACL  
**access-lists** ACL **show ip**

ACL

```
Ruijie(config)# ip access-list extended 123
Ruijie(config-ext-nacl)# show ip access-lists
ip access-list extended 123
Ruijie(config-ext-nacl)#
```

ACL

```
Ruijie(config)# ip access-list standard std-acl
Ruijie(config-std-nacl)# show ip access-lists
ip access-list standard std-acl
Ruijie(config-std-nacl)#
```

<b>show ip access-lists</b>	IP

RGOS10.0

### 51.1.3 MAC access-list

MAC ACL **no**  
 ACL

**mac access-list extended** {id | name}  
**no mac access-list extended** {id | name}

Id MAC 700-799  
 Name MAC

**show mac access-lists** ACL

MAC ACL

```
Ruijie(config)# mac access-list extended mac-acl
Ruijie(config-mac-nacl)# show mac access-lists
mac access-list extended mac-acl
Ruijie(config-mac-nacl)#
```

MAC ACL

```
Ruijie(config)# mac access-list extended 704
Ruijie(config-mac-nacl)# show mac access-lists
mac access-list extended 704
Ruijie(config-mac-nacl)#
```

<b>show mac access-lists</b>	mac

RGOS10.0

### 51.1.4 expert access-list

ACL ACL **no**  
 ACL

**expert access-list extended** {id | name}  
**no expert access-list extended** {id | name}

*Id* Expert 2700-2899  
*Name* ACL

**show expert access-lists** ACL

ACL

```
Ruijie(config)# expert access-list extended exp-acl
Ruijie(config-exp-nacl)# show expert access-lists
expert access-list extended exp-acl
Ruijie(config-exp-nacl)#
```

ACL

```
Ruijie(config)# expert access-list extended 2704
Ruijie(config-exp-nacl)# show expert access-lists
expert access-list extended 2704
Ruijie(config-exp-nacl)#
```

<b>show expert access-lists</b>	

RGOS10.0

### 51.1.5 ipv6 access-list

IPV6 ACL **no**  
 ACL

**ipv6 access-list** name  
**no ipv6 access-list** name

Name ACL

**show access-lists** ACL

IPV6 ACL

```
Ruijie(config)# ipv6 access-list v6-acl
Ruijie(config-ipv6-nacl)# show access-lists
ipv6 access-list extended v6-acl
Ruijie(config-ipv6-nacl)#
```

<b>show access-lists</b>	IPV6

RGOS10.0

### 51.1.6 ip access-list resequence

ip ACL IPV6 ACL  
no

**ip access-list resequence** {*id* | *name*} **start-sn inc-sn**  
**no ip access-list resequence** {*id* | *name*}

*Id* ACL

*Name* ACL

*start-sn*

*inc-sn*

*start-sn* 10

*inc-sn* 10

---

**show access-lists**

ACL

ACL

```
Ruijie# show access-lists
ip access-list standard 1
10 permit host 192.168.4.12
20 deny any any
Ruijie# config
Ruijie(config)# ip access-list resequence 1 21 43
Ruijie(config)# exit
Ruijie# show access-lists
ip access-list standard 1
21 permit host 192.168.4.12
64 deny any any
Ruijie#
```

<b>show access-lists</b>	

RGOS10.0

### 51.1.7 deny

(deny)

ACL

ACL

1) IP

[sn] **deny** {*source source-wildcard* | **host source** | **any**}

2) IP

[sn] **deny protocol** *source source-wildcard destination destination-wildcard* [**precedence precedence**] [**tos tos**] [**fragments**] [**time-range time-range-name**]

IP

**Internet Control Message Protocol (ICMP)**

**[sn] deny icmp** {source source-wildcard | **host** source | **any**}  
 {destination destination-wildcard | **host** destination | **any**} [icmp-type]  
 [[icmp-type [icmp-code]] | [icmp-message]] [**precedence** precedence]  
 [**tos** tos] [**fragments**] [**time-range** time-range-name]

#### Transmission Control Protocol (TCP)

**[sn] deny tcp** {source source-wildcard | **host** Source | **any**} [operator  
**port** [port]] {destination destination-wildcard | **host** destination | **any**}  
 [operator **port** [port]] [**precedence** precedence] [**tos** tos] [**fragments**]  
 [**time-range** time-range-name] [**match-all** tcp-flag]

#### User Datagram Protocol (UDP)

**[sn] deny udp** {source source-wildcard | **host** source | **any**} [ operator  
**port** [port]] {destination destination-wildcard | **host** destination | **any**}  
 [operator **port** [port]] [**precedence** precedence] [**tos** tos] [**fragments**]  
 [**time-range** time-range-name]

#### 3) MAC

**[sn] deny** {**any** | **host** source-mac-address}{**any** | **host**  
 destination-mac-address} [ethernet-type][**cos** [out] [inner in]]

#### 4) Expert

**[sn] deny**[protocol | [ethernet-type][ **cos** [out] [inner in]]] [[**VID**  
 [out][inner in]]] {source source-wildcard | **host** source | **any**}{**host**  
 source-mac-address | **any** } {destination destination-wildcard | **host**  
 destination | **any**} {**host** destination-mac-address | **any**} [**precedence**  
 precedence] [**tos** tos][**fragments**] [**time-range** time-range-name]

ethernet-type cos

**[sn] deny** {[ethernet-type][**cos** [out] [inner in]]} [[**VID** [out][inner in]]]  
 {source source-wildcard | **host** source | **any**} {**host**  
 source-mac-address | **any** } {destination destination-wildcard | **host**  
 destination | **any**} {**host** destination-mac-address | **any**} [**time-range**  
 time-range-name]

protocol

**[sn] deny protocol** [[**VID** [out][inner in]]] {source source-wildcard |  
**host** source | **any**} {**host** source-mac-address | **any** } {destination  
 destination-wildcard | **host** destination | **any**} {**host**  
 destination-mac-address | **any**} [**precedence** precedence] [**tos** tos]  
 [**fragments**] [**time-range** time-range-name]

expert

#### Internet Control Message Protocol (ICMP)

*[sn] deny icmp* [[VID *[out][inner in]*]] {*source source-wildcard* | **host source** | **any**} {**host source-mac-address** | **any**} {*destination destination-wildcard* | **host destination** | **any**} {**host destination-mac-address** | **any**} [*icmp-type*] [[*icmp-type [icmp-code]*] | [*icmp-message*]] [**precedence precedence**] [**tos tos**] [**fragments**] [**time-range time-range-name**]

#### Transmission Control Protocol (TCP)

*[sn] deny tcp* [[VID *[out][inner in]*]] {*source source-wildcard* | **host Source** | **any**} {**host source-mac-address** | **any**} [*operator port [port]*] {*destination destination-wildcard* | **host destination** | **any**} {**host destination-mac-address** | **any**} [*operator port [port]*] [**precedence precedence**] [**tos tos**] [**fragments**] [**time-range time-range-name**] [**match-all tcp-flag**]

#### User Datagram Protocol (UDP)

*[sn] deny udp* [[VID *[out][inner in]*]] {*source source -wildcard* | **host source** | **any**} {**host source-mac-address** | **any**} [*operator port [port]*] {*destination destination-wildcard* | **host destination** | **any**} {**host destination-mac-address** | **any**} [*operator port [port]*] [**precedence precedence**] [**tos tos**] [**fragments**] [**time-range time-range-name**]

#### 5) 5 IPV6

*[sn] deny protocol* {*source-ipv6-prefix/prefix-length* | **any** | **host source-ipv6-address**} {*destination-ipv6-prefix / prefix-length* | **any** | *hostdestination-ipv6-address*} [**dscp dscp**] [**flow-label flow-label**] [**fragments**] [**time-range time-range-name**]

#### IPV6

#### Internet Control Message Protocol (ICMP)

*[sn] deny icmp* {*source-ipv6-prefix / prefix-length* | **any source-ipv6-address** | **host**} {*destination-ipv6-prefix / prefix-length* | **host destination-ipv6-address** | **any**} [*icmp-type*] [[*icmp-type [icmp-code]*] | [*icmp-message*]] [**dscp dscp**] [**flow-label flow-label**] [**fragments**] [**time-range time-range-name**]

#### Transmission Control Protocol (TCP)

*[sn] deny tcp* {*source-ipv6-prefix / prefix-length* | **host source-ipv6-address** | **any**} [*operator port [port]*] {*destination-ipv6-prefix / prefix-length* | **host destination-ipv6-address** | **any**} [*operator port [port]*] [**dscp dscp**] [**flow-label flow-label**] [**fragments**] [**time-range time-range-name**] [**match-all tcp-flag**]

#### User Datagram Protocol (UDP)

*[sn] deny udp* {*source-ipv6-prefix/prefix-length* | **host**

*source-ipv6-address* | **any** [ *operator* **port** [ *port* ] ]  
{ *destination-ipv6-prefix* / *prefix-length* | **host** *destination-ipv6-address* |  
**any** } [ *operator* **port** [ *port* ] ] [ **dscp** *dscp* ] [ **flow-label** *flow-label* ]  
[ **fragments** ] [ **time-range** *time-range-name* ]

**access-list**

*Sn* ACL

*source-ipv6-prefix* IPv6 .

*destination-ipv6-prefix* IPv6

*prefix-length*

*source-ipv6-address* IPv6

*destination-ipv6-address* IPv6

**dscp**

*dscp* 0-63.

**flow-label**

*flow-label* 0-1048575.

*protocol* IPV6 IPV6 | icmp | tcp | udp <0-255>

ACL

ACL

ACL

IP     ACL  
TCP    100

IP    192.168.4.12  
      1



[ *icmp-type* ] [[*icmp-type* [*icmp-code* ]] | [ *icmp-message* ]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

### Transmission Control Protocol (TCP)

[*sn*] **permit tcp** {*source source-wildcard* | **host** *Source* | **any**} [*operator* **port** [*port*]] {*destination destination-wildcard* | **host** *destination* | **any**} [*operator* **port** [*port*]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*] [**match-all** *tcp-flag*]

### User Datagram Protocol (UDP)

[*sn*] **permit udp** {*source source-wildcard*|**host** *source* |**any**} [ *operator* **port** [*port*]] {*destination destination-wildcard* |**host** *destination* | **any**} [*operator* **port** [*port*]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

### 3) MAC

[*sn*] **permit** {**any** | **host** *source-mac-address*} {**any** | **host** *destination-mac-address*} [*ethernet-type*][ **cos** [*out*] [*inner in*]]

### 4) Expert

[*sn*] **permit** [**protocol** | [*ethernet-type*][ **cos** [*out*] [*inner in*]]] [**VID** [*out*][*inner in*]] {*source source-wildcard* | **host** *source* | **any**} {**host** *source-mac-address* | **any**} {*destination destination-wildcard* | **host** *destination* | **any**} {**host** *destination-mac-address* | **any**} [**precedence** *precedence*] [**tos** *tos*][**fragments**] [**time-range** *time-range-name*]

Ethernet-type cos

[*sn*] **permit** {*ethernet-type*| **cos** [*out*] [*inner in*]} [**VID** [*out*][*inner in*]] {*source source-wildcard* | **host** *source* | **any**} {**host** *source-mac-address* | **any**} {*destination destination-wildcard* | **host** *destination* | **any**} {**host** *destination-mac-address* | **any**} [**time-range** *time-range-name*]

Protocol

[*sn*] **permit protocol** [**VID** [*out*][*inner in*]] {*source source-wildcard* | **host** *Source* | **any**} {**host** *source-mac-address* | **any**} {*destination destination-wildcard* | **host** *destination* | **any**} {**host** *destination-mac-address* | **any**} [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

Expert

### Internet Control Message Protocol (ICMP)

[*sn*] **permit icmp** [**VID** [*out*][*inner in*]] {*source source-wildcard* | **host** *source* | **any**} {**host** *source-mac-address* | **any**} {*destination destination-wildcard* | **host** *destination* | **any**} {**host**

*destination-mac-address* | **any**] [*icmp-type*] [[*icmp-type* [*icmp-code*]] | [*icmp-message*]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

#### Transmission Control Protocol (TCP)

[*sn*] **permit tcp** [**VID** [*out*][*inner in*]]{*source source-wildcard* | **host** *Source* | **any**} {**host** *source-mac-address* | **any**} [*operator port* [*port*]] {*destination destination-wildcard* | **host** *destination* | **any**} {**host** *destination-mac-address* | **any**} [*operator port* [*port*]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*] [**match-all** *tcp-flag*]

#### User Datagram Protocol (UDP)

[*sn*] **permit udp** [**VID** [*out*][*inner in*]]{*source source-wildcard* | **host** *source* | **any**} {**host** *source-mac-address* | **any**} [*operator port* [*port*]] {*destination destination-wildcard* | **host** *destination* | **any**} {**host** *destination-mac-address* | **any**} [*operator port* [*port*]] [**precedence** *precedence*] [**tos** *tos*] [**fragments**] [**time-range** *time-range-name*]

#### 5) IPV6

[*sn*] **permit protocol** {*source-ipv6-prefix / prefix-length* | **any** | **host** *source-ipv6-address*} {*destination-ipv6-prefix / prefix-length* | **any** | *hostdestination-ipv6-address*} [**dscp** *dscp*] [**flow-label** *flow-label*] [**fragments**] [**time-range** *time-range-name*]

#### IPV6

#### Internet Control Message Protocol (ICMP)

[*sn*] **permit icmp** {*source-ipv6-prefix / prefix-length* | **any** *source-ipv6-address* | **host**} {*destination-ipv6-prefix / prefix-length* | **host** *destination-ipv6-address* | **any**} [*icmp-type*] [[*icmp-type* [*icmp-code*]] | [*icmp-message*]] [**dscp** *dscp*] [**flow-label** *flow-label*] [**fragments**] [**time-range** *time-range-name*]

#### Transmission Control Protocol (TCP)

[*sn*] **permit tcp** {*source-ipv6-prefix / prefix-length* | **host** *source-ipv6-address* | **any**} [*operator port* [*port*]] {*destination-ipv6-prefix / prefix-length* | **host** *destination-ipv6-address* | **any**} [*operator port* [*port*]] [**dscp** *dscp*] [**flow-label** *flow-label*] [**fragments**] [**time-range** *time-range-name*] [**match-all** *tcp-flag*]

#### User Datagram Protocol (UDP)

[*sn*] **permit udp** {*source-ipv6-prefix / prefix-length* | **host** *source-ipv6-address* | **any**} [*operator port* [*port*]] {*destination-ipv6-prefix / prefix-length* | **host**

ACL



<b>expert access-list</b>	ACL
<b>ipv6 access-list</b>	IPV6 ACL
<b>deny</b>	ACL

RGOS10.0

### 51.1.9 list-remark

ACL                    **no**

**list-remark** *text*

*Text*

ACL

ACL

```
Ruijie# ip access-list extended 102
Ruijie(config-ext-nacl)# list-remark this acl is to
filter the host 192.168.4.12
Ruijie(config-ext-nacl)# show access-lists
ip access-list extended 102
deny ip host 192.168.4.12 any
1000 hits
this acl is to filter the host 192.168.4.12
Ruijie(config-ext-nacl)#
```

```
Ruijie# configure terminal
```

```
Ruijie(config)# access-list 88 list-remark
last_comment
```



**show access-lists**

RGOS10.3(5)

**51.1.11 no sn**

ACL

**no sn****sn ACL**

ACL

ACL

ACL

```

Ruijie(config)# ipv6 access-list extended v6-acl
Ruijie(config-ipv6-nacl)# permit ipv6
host ::192.168.4.12 any
Ruijie(config-ipv6-nacl)# 12 deny ipv6 host any any
Ruijie(config-ipv6-nacl)# show access-lists
ipv6 access-list extended v6-acl
10 permit ipv6 host ::192.168.4.12 any
12 deny ipv6 any any
Ruijie(config-ipv6-nacl)# no 12
Ruijie(config-ipv6-nacl)# show access-lists
ipv6 access-list extended v6-acl
10 permit ipv6 host ::192.168.4.12 any
Ruijie(config-ipv6-nacl)#

```

<b>show access-lists</b>	
<b>ip access-list</b>	ip ACL
<b>ipv6 access-list</b>	IPV6 ACL
<b>deny</b>	ACL
<b>permit</b>	ACL



### 51.1.13 MAC access-group

MAC ACL

no

```
mac access-group {id | name}{in | out}
no mac access-group {id | name} {in | out}
```

```
id    MAC          700-799
name  MAC
in
out
```

ACL

ACL

show running-config

```
1          access-list accept_00d0f8xxxxxx_only      Gigabit
```

```
Ruijie(config)# interface GigaEthernet 1/1
Ruijie(config-if)# mac access-group
accept_00d0f8xxxxxx_only in
```

show access-group	ACL

RGOS10.0

### 51.1.14 expert access-group

EXPERT ACL

no

**expert access-group** {*id* | *name*} {**in** | **out**}  
**no expert access-group** {*id* | *name*} {**in** | **out**}

*id* Expert 2700-2899  
*name* Expert  
**in**  
**out**

Expert ACL

ACL  
**show access-group**

```

1          access-list accept_00d0f8xxxxxx_only      Gigabit
Ruijie(config)# interface GigaEthernet 0/1
Ruijie(config-if)# expert access-group
accept_00d0f8xxxxxx_only in
    
```

<b>show access-group</b>	ACL

RGOS10.0

### 51.1.15 ipv6 traffic-filter

IPV6 ACL no

**ipv6 traffic-filter** *name* {**in** | **out**}  
**no ipv6 traffic-filter** *name* {**in** | **out**}

*name* IPV6

**in**  
**out**

IPV6 ACL

ACL  
**show ipv6 traffic-filter**

```

access-list v6-acl      Gigabit    1
Ruijie(config)# interface GigaEthernet 0/1
Ruijie(config-if)# ipv6 traffic-filter v6-acl in
    
```

<b>show access-group</b>	ACL

RGOS10.0

## 51.2

:

- **show access-lists**
- **show ip access-group**
- **show expert access-group**
- **show mac access-group**
- **show ipv6 traffic-filter**
- **show access-group**

### 51.2.1 show access-lists

ACL                      ACL  
**show access-lists** [*id* | *name*]

*id*  
*name*

acl                    *id*   *name*                    ACL

```
Ruijie# show access-lists n_acl
ip access-list standard n_acl
Ruijie# show access-lists 102
ip access-list extended 102
Ruijie# show access-lists
ip access-list standard n_acl
ip access-list extended 101
mac access-list extended mac-acl
expert access-list extended exp-acl
ipv6 access-list extended v6-acl
```

<b>ip access-list</b>	IP ACL
<b>mac access-list</b>	MAC    ACL
<b>expert access-list</b>	Expert    ACL
<b>ipv6 access-list</b>	IPv6    ACL

RGOS10.0

## 51.2.2 show ip access-group

IP ACL



RGOS10.0

### 51.2.4 show mac access-group

MAC

**show mac access-group**[interface <interface>]

<interface>

MAC ACL

MAC ACL

```
Ruijie# show mac access-group interface gigabitethernet
0/3
mac access-group mm in
Applied On interface GigabitEthernet 0/3.
```

mac access-list	MAC ACL

RGOS10.0

### 51.2.5 show ipv6 traffic-filter

IPV6

**show ipv6 traffic-filter** [interface <interface>]

<interface>

IPv6 ACL IPv6

ACL

```
Ruijie# show ipv6 traffic-filter interface
gigabitethernet 0/4
ipv6 traffic-filter v6 in
Applied On interface GigabitEthernet 0/4.
```

ipv6 access-list	IPV6    ACL

RGOS10.0

### 51.2.6 show access-group

ACL

**show access-group [interface <interface>]**

<interface>

ACL

ACL

```
Ruijie# show access-group
ip access-list standard ipstd3
Applied On interface GigabitEthernet 0/1.
ip access-list standard ipstd4
Applied On interface GigabitEthernet 0/2.
ip access-list extended 101
Applied On interface GigabitEthernet 0/3.
ip access-list extended 102
Applied On interface GigabitEthernet 0/8.
```

<b>ip access-group</b>	ip
<b>mac access-group</b>	MAC
<b>expert access-group</b>	Expert
<b>ipv6 traffic-filter</b>	IPV6

RGOS10.0

# 52 QOS

## 52.1

```

QoS
1 policy-map
policy-map
class-map 1 ACL
class-map 1 ACL ACE
ACE "ACL"
QoS
Policy Map
QoS
Policy Map
QoS
Off

```

QoS

CoS	0
	8
	WRR
QueueWeight	1:1:1:1:1:1:1:1
WRR Weight Range	1:15
DRR Weight Range	1:15
	No Trust

Cos

CoS	0	1	2	3	4	5	6	7
	1	2	3	4	5	6	7	8

CoS to DSCP

CoS	0	1	2	3	4	5	6	7
DSCP	0	8	16	24	32	40	48	56

IP-Precedence to DSCP

IP-Precedence	0	1	2	3	4	5	6	7
			16	24	32	40	48	56



```
MAC ACL, me
Ruijie(config)# mac access-list extended me
ACL
Ruijie(config-ext-macl)# permit host 1111.2222.3333
any
ACL
Ruijie(config-ext-macl)# exit
class-map, cm
Ruijie(config)# class-map cm
ACL
Ruijie(config-cmap)# match access-group me
class-map
Ruijie(config-cmap)# exit

show mac access-lists
show ip access-lists
show class-map
```

## 52.2.4 Policy Maps

```
policy map          policymap
[no] policy-map policy-map-name
policy map          class-map          ,
[no] class class-map-name
IP                  ipdscp            IP
set ip dscp new-dscp
no set ip dscp
```

---

```
police rate-bps burst-byte[exceed-action {drop | dscp dscp-value}]
```

```
no police
```

```
policy-map-name          policymap
```

```
no policy-map policy-map-name          policy map
```

```
class-map-name          class map
```

```
no class class-map-name
```

```
new-dscp      DSCP
```

```
rate-bps          kbps
```

```
burst-byte          kbyte
```

```
drop
```

```
dscp-value          DSCP
```

```
policy map,      po
```

```
Ruijie(config)# policy-map po
```

```
class-map cm
```

```
Ruijie(config-pmap)# class cm
```

```
dscp      10
```

```
Ruijie(config-pmap-c)# set ip dscp 10
```

```
1M,          4096k,          dscp 16
```

```
Ruijie(config-pmap-c)# police 1000000 4096
```

```
exceed-action dscp 16
```

```
show policy-map
```

## 52.2.5 service-policy

```
policy map
```

```
service-policy {input | output} policy-map-name
```

**no service-policy {input | output}**

*policy-map-name*                      policymap

**no**                      policy map

```
Ruijie(config)# interface fastEthernet 0/1
```

```
Ruijie(config-if)# service-policy input po
```

```
Ruijie(config)# virtual-group 3
```

```
Ruijie(config-if)# service-policy input po
```

**show mls qos interface**

virtual-group

output

## 52.2.6 priority-queue

**[no] priority-queue**

**priority-queue**                      SP

**no priority-queue**                      WRR

WRR

```
Ruijie(config)# no priority-queue
```

**show mls qos queueing**

## 52.2.7 priority-queue cos-map

CoS

**priority-queue cos-map** *qid cos0 [cos1 [cos2 [cos3 [cos4 [cos5 [cos6 [cos7]]]]]]]*

**no priority-queue cos-map**

*qid*                    *id*  
*cos0 ... cos7*        *CoS*  
*no*

Ruijie(config)# **priority-queue cos-map 1 0 1**

**show mls qos queueing**

## 52.2.8 wrr-queue bandwidth

WRR

**wrr-queue bandwidth** *weight1 ... weightn*

**no wrr-queue bandwidth**

*weight1...weightn*            *n*                                    *n*

**no**

*weight1: ...: weightn = 1:...:1*

```
Ruijie(config)# wrr-queue bandwidth 1 2 3 4 5 6 7 8
```

SDP/8/55Q/0m/20-f/650

```
show mls qos queueing
```

### 52.2.9 mls qos map cos-dscp

P	C	5B CoS	D	DSCP
---	---	--------	---	------

```
mls qos map cos-dscp
```

*dscp-list*

**cos**                    0 7

**no**

?•5 ,ÖG!5B

?•e ,ÖG!5B

**mls qos scheduler [sp | wrr | drr]**

**no mls qos scheduler**

**sp**

**wrr**

**drr**

**no**

wrr

Ruijie(config)# **mls qos scheduler sp**

**show mls qos scheduler**

### 52.2.13 drr-queue bandwidth

DRR

**drr-queue bandwidth *weight1...weight8***

**no drr-queue bandwidth**

*weight1...weight8*

**no**

Ruijie(config)# **drr-queue bandwidth 1 2 3 4 5 6 7 8**

**show mls qos queueing**

86

### 52.2.14 mls qos map ip-prec-dscp

ipprec DSCP

**mls qos map ip-prec-dscp dscp1...dscp8**

**no mls qos map ip-prec-dscp**

**dscp**

**no**

```
Ruijie(config)# mls qo map ip-prec -dscp 8 10 16 18 24
26 32 34
```

**show mls qos maps** dscp-cos maps,dscp-cos maps  
ip-prec-dscp maps

### buffer management qos queue

**buffer management qos queue** *queue-number*

<i>queue-number</i>	

AP

*queue-number* 1

0/52

3

Ruijie(config)# **interface gigabitethernet 0/52**

Ruijie(config-if)# **buffer management qos queue 8**

<b>show buffer management queue</b>	

RGOS10.35

## virtual-group

Aggregate Port

no

**virtual-group** *virtual-group-number*

**no virtual-group** *virtual-group-number*

<i>virtual-group-number</i>	128



*class-name* class map

policy name

```
Ruijie# show policy-map
```

### 52.3.3 show mls qos interface

QoS

```
show mls qos interface interface-id [policers]
```

*interface-id*

**policers** police

QoS

```
Ruijie# show mls qos interface fastEthernet 0/1
```

### 52.3.4 show mls qos virtual-group

police

```
show mls qos virtual-group [virtual-group-number | policers]
```

*virtual-group-number*

**policers** police

police

```
Ruijie# show mls qos virtual-group 1
```

```
Ruijie# show mls qos virtual-group policers
```

### 52.3.5 show mls qos queueing

QoS (cos-to-queue map,wrr weight,drp weight)

```
show mls qos queueing
```

```
Ruijie# show mls qos queueing
```

### 52.3.6 show mls qos scheduler

```
show mls qos scheduler
```

```
Ruijie# show mls qos scheduler
```

### 52.3.7 show mls qos maps

dscp-cos maps,dscp-cos maps ip-prec-dscp maps

```
show mls qos maps [cos-dscp | dscp-cos | ip-prec-dscp]
```

**cos-dscp** cos-dscp maps

**dscp-cos** dscp-cos maps

**ip-prec-dscp** ip-prec-dscp maps

dscp-cos maps dscp-cos maps ip-prec-dscp maps

```
Ruijie# show mls qos maps
```

### 52.3.8 show mls qos rate-limit

```
show mls qos rate-limit [interface interface-id]
```

```
interface    interface-id    rate-limit
```

```
Ruijie# show mls qos rate-limit
```

### 52.3.9 how buffer management qos queue

```
show buffer management qos queue
```

```
Ruijie#show buffer management qos queue
```

```
Interface           Status Queue
```

```
-----
```

```
FastEthernet        0/1   Auto   8
```

```
FastEthernet        0/2   Admin  8
```

```
.....
```

```
GigabitEthernet    0/52  Auto   8
```

## 52.3.10 show virtual-group

**show virtual-group** [*virtual-group-number* | **summary**]

**virtual-group-number**

128

**summary**

Ruijie# **show virtual-group 1**

Ruijie# **show virtual-group summary**

# 53 VRRP

## 53.1

VRRP

- vrrp authentication
- vrrp delay
- vrrp description
- vrrp ip
- vrrp description

```
vrrp 1 authentication x30dn78k
```

Ruijie(config-if)# <b>vrrp</b> group ip ipaddress [ <b>secondary</b> ]	VRRP IP

### 53.1.2 vrrp delay

VRRP

```
vrrp delay { minimum min-seconds | reload reload-seconds }
```

```
no vrrp delay
```

```
min-seconds VRRP min-seconds
```

```
reload-seconds VRRP  
min-seconds reload-seconds VRRP  
min-seconds
```

VRRP

```
UP VRRP  
VRRP 0~60
```

```
UP E0 VRRP 10  
UP VRRP 1 10
```

```
interface FastEthernet 0/0  
shutdown  
ip address 10.0.1.1 255.255.255.0  
vrrp delay minimum 10  
vrrp 1 ip 10.0.1.20  
no shutdown  
show vrrp 1
```

Ruijie(config-if)# <b>vrrp group ip</b> <i>ipaddress</i> [ <b>secondary</b> ]	VRRP IP

RGOS10.3(4)

### 53.1.3 vrrp description

VRRP **no**

**vrrp group description** *text*

**no vrrp group description**

*group* VRRP

*text* VRRP

VRRP VRRP  
VRRP

VRRP VRRP

E0 VRRP 1 Building A –  
Marketing and Administration

```
interface FastEthernet 0/0
ip address 10.0.1.1 255.255.255.0
vrrp 1 ip 10.0.1.20
vrrp 1 description "Building A - Marketing and
Administration"
```

### 53.1.4 vrrp ip

```
                VRRP          IP          no
                VRRP          IP
vrrp group ip ipaddress [secondary]
no vrrp group ip ipaddress [secondary]
```

```
group          VRRP
ipaddress      IP
secondary      IP
                VRRP
```

```
secondary I1 8 VRRP +ACCEPT
```

**vrrp group preempt [delay seconds]**

**no vrrp group preempt [delay]**

*group* VRRP

**delay seconds**

0

Master

VRRP

VRRP

VRRP

VRRP

Master

VRRP

VRRP

*group* VRRP

*level* VRRP

VRRP 100 VRRP VRRP

VRRP

VRRP 1 254

vrrp 1 priority 254

Ruijie(config-if)# <b>vrrp group ip</b> <i>ipaddress [ secondary ]</i>	VRRP IP
Ruijie(config-if)# <b>vrrp group preempt</b> <i>[ delay seconds ]</i>	VRRP

### 53.1.7 vrrp timers advertise

VRRP no

**vrrp group timers advertise interval**

**no vrrp group timers advertise**

*group* VRRP

*interval* VRRP ( )

VRRP VRRP  
1

VRRP  
VRRP

VRRP

VRRP 4

vrrp 1 timers advertise 4

Ruijie(config-if)# <b>vrrp group ip</b> <i>ipaddress</i> [ <b>secondary</b> ]	VRRP IP
Ruijie(config-if)# <b>vrrp group timers learn</b>	

### 53.1.8 vrrp timers learn

no

**vrrp group timers learn**  
**no vrrp group timers learn**

*group* VRRP

VRRP

VRRP

VRRP

VRRP

VRRP

Master

VRRP

Master

VRRP

VRRP 1

vrrp 1 timers learn

Ruijie(config-if)# <b>vrrp group ip</b> <i>ipaddress [secondary]</i>	VRRP IP
Ruijie(config-if)# <b>vrrp group timers</b> <b>advertise [msec] interval</b>	VRRP

### 53.1.9 vrrp track

```

VRRP          vrrp group track interface-type number
              VRRP IP          vrrp group track ip-address
              vrrp group track bfd      BFD          IP      no
    
```

```

vrrp group track [interface-type number] bfd interface-type
interface-number ipv4-address [priority ]
    
```

```

vrrp group track ip-address [[[ interval interval-value ]
    timeout timeout-value ] priority ]
    
```

```

vrrp group track [interface-type number] bfd interface-type
interface-number ipv4-address | ip-address
    
```

```

group      VRRP
    
```

```

interface-type
    
```

```

number
    
```

```

ipv4-address      IPv4      bfd
    
```

```

interval-value
    3
    
```

```

timeout-value
    1
    
```

```

priority          10          VRRP
    
```

```

          VRRP          VRRP
          IP
    
```

( Routed Port SVI Loopback Tunnel )  
IP ping

VRRP 1 Routed Port Fa1/1 Fa1/1  
VRRP 30 Fa1/1 VRRP  
1

vrrp 1 track FastEthernet 1/1 30

# VRRP BFD 192.168.1.3  
Ruijie#

- **debug vrrp events**
- **debug vrrp packets**
- **debug vrrp state**

### **53.2.1 debug vrrp**

**debug vrrp errors**  
**no debug vrrp errors**

VRRP

VRRP

```
Ruijie# debug vrrp errors
Ruijie#
VRRP: Grp 1 Advertisement from 192.168.201.213 has
invalid virtual address 192.168.1.1
VRRP: Grp 1 Advertisement from 192.168.201.213 has
invalid virtual address 192.168.1.1
VRRP: Grp 1 Advertisement from 192.168.201.213 has
invalid virtual address 192.168.1.1
```

### 53.2.3 debug vrrp events

VRRP no

**debug vrrp events**  
**no debug vrrp events**

VRRP

VRRP

```
Ruijie# debug vrrp events
VRRP: Grp 1 Event - Advert higher or equal priority
VRRP: Grp 1 Event - Advert higher or equal priority
VRRP: Grp 1 Event - Advert higher or equal priority
```

### 53.2.4 debug vrrp packets

VRRP no



```
Ruijie# debug vrrp state
Ruijie#
%VRRP-6-STATECHANGE: FastEthernet 0/0 Grp 2 state Master
-> Backup
%VRRP-6-STATECHANGE: FastEthernet 0/0 Grp 2 state Backup
-> Master

Ruijie# config terminal
Enter configuration commands, one per line. End with
CNTL/Z.

Ruijie(config)# interface fastethernet 0/0
Ruijie(config-if)# no shutdown
Ruijie(config-if)# end
Ruijie#
%VRRP-6-STATECHANGE: FastEthernet 0/0 Grp 2 state Master
-> Init
```

## 53.3

### 53.3.1 show vrrp

#### VRRP

```
show vrrp [ brief | group ]
```

```
brief                VRRP
group                VRRP
```

#### VRRP

#### VRRP

```
Ruijie# show vrrp
FastEthernet 0/0 - Group 1
State is Backup
Virtual IP address is 192.168.201.1 configured
Virtual MAC address is 0000.5e00.0101
Advertisement interval is 3 sec
Preemption is enabled
```







```
Ruijie(config-if)# bfd interval 100 min_rx 100 multiplier 3
```

<b>bfd all-interfaces</b>	BFD
<b>clear bfd</b>	BFD
<b>ip ospf bfd</b>	OSPF BFD
<b>ip rip bfd</b>	RIP BFD

```
# OSPF BFD
Ruijie(config)# router ospf 123
Ruijie(config-router)# bfd all-interface
```

<b>bfd</b>	BFD

```
ip ospf bfd OSPF BFD
```

```
# BFD
Ruijie(config)# bfd cpp
```

-	-

### 54.1.4 bfd echo

**bfd echo**                    **echo**                    **no**                    **echo**

```
bfd echo
no bfd echo
```

-	-

BFD                    echo

BFD                    echo                    echo  
**Interval milliseconds**                    **min\_rx milliseconds**

```
r                    BFD                    ECHO                    ,                    BFD                    no ip  
                  redirects                    ICMP                    (                    Land-based                    )                    no ip deny land  
                  Echo                    BFD
```

```
Ruijie(config)# no switchport
Ruijie(config-if)# bfd echo
```

<b>bfd</b>	BFD
<b>ip redirects</b>	ICMP
<b>ip deny land</b>	Land-based
<b>bfd slow-timer</b>	

### 54.1.5 bfd slow-timer

```
bfd slow-timer          BFD          ECHO
                        BFD            no
```

**bfd slow-timer** [*milliseconds*]

**no bfd slow-timer**

<i>milliseconds</i>	f  tBFD %\$\$\$ ' \$\$\$z %\$\$\$

%\$\$\$ag

```
# slow-timer 14000
```

```
Ruijie(config)# bfd slow-timer 14000
```

<b>bfd echo</b>	BFD Echo

### 54.1.6 ip ospf bfd

```

        ip ospf bfd          OSPF      BFD
    disable                no
ip ospf bfd [disable]
no ip ospf bfd
    
```

<b>disable</b>	fl t CGDF BFD

```
X]gU`Y          OSPF      BFD
```

```

        OSPF      BFD
    OSPF          [no] bfd all-interfaces
        BFD
        ip ospf bfd [disable]
    OSPF      BFD
    
```

```

# Routed Port      FastEthernet 0/2          OSPF      BFD
Ruijie(config)# interface FastEthernet 0/2
Ruijie(config-if)# no switchport
    
```

```
Ruijie(config-if)# ip ospf bfd disable
```

**bfd**

**BFD**

Ruijie(config-if)# ip rip bfd disable

<b>bfd</b>	BFD
<b>bfd all-interfaces</b>	BFD

### 54.1.8 ip route static bfd

**ip route static bfd** **BFD** **no**

**ip route static bfd** [vrf vrf-name] interface-type interface-number gateway [source ip-address]

**no ip route static bfd** [vrf vrf-name] interface-type interface-number gateway [source ip-address]

j fZ j fZ! bUaY	( ) VRF
] bhYfZUMV! hndY ] bhYfZUMV! bi aVYf	
[ UhYkUm	ID BFD ID BFD
gci fW ] d! UXXfYgg	fl ł BFD ID ž ID

BFD

<b>r</b>	BFD
----------	-----



## BFD

<b>r</b>	ID	BFD
#	BFD	BFD 172.16.0.2

```

Ruijie#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.

Ruijie(config)# route-map Example1 permit 10

Ruijie(config-route-map)# match ip address 1

Ruijie(config-route-map)# set ip precedence priority

Ruijie(config-route-map)#set ip next-hop
verify-availability 172.16.0.2 bfd FastEthernet 0/1
172.16.0.2

Ruijie(config-route-map)#end

```

<b>bfd</b>	BFD
------------	-----

### 54.1.10 vrrp bfd

	<b>vrrp bfd</b>	VRRP	BFD
master		<b>no</b>	
	<b>vrrp group-number bfd ip-address</b>		
	<b>no vrrp group-number bfd ip-address</b>		



bfd up-dampening [milliseconds]

no bfd up-dampening

<i>milliseconds</i>	fl	Ł		UP	ID
		\$ž		DCKB	\$ ' \$\$\$\$\$ž
		"		\$	ID

\$ag \$ ID

# UP ID \* \$ž \$\$\$  
 " Ruijie(config-if) bfd **up-dampening** 60000

<b>bfd</b>	BFD

<b>10.3(5)</b>	

## 54.2

BFD

- [show bfd neighbors](#)

## 54.2.1 show bfd neighbors

BFD

**show bfd neighbors** [*vrf vrf-name*]

## Int

172.16.11.1 172.16.11.2 1/2 1 532 (3 ) Up  
Ge2/1

Local Diag: 0, Demand mode: 0, Poll bit: 0

MinTxInt: 200000, MinRxInt: 200000, Multiplier: 5

Received MinRxInt: 50000, Received Multiplier: 3

Holdown (hits): 600(22), Hello (hits): 200(84453)

Rx Count: 49824, Rx Interval (ms) min/max/avg: 208/440/332

Tx Count: 84488, Tx Interval (ms) min/max/avg: 152/248/196

**Registered protocols: BGP**

Uptime: 02:18:49

**Last packet: Version: 1** - Diagnostic: 0

I Hear You bit: 1 - Demand bit: 0

Poll bit: 0 - Final bit: 0

Multiplier: 3 - Length: 24

My Discr.: 2 - Your Discr.: 1

Min tx interval: 50000 - Min rx interval: 50000

Received	
Received	
Holdown (hits)	
Hello (hits)	hello
Rx Count	BFD
Rx Interval	
Tx Count	BFD
Tx Interval	
Registered	
Uptime	UP
Last packet	BFD

-	-

---

S3760      BGP    BFD

# 55 RLDP

## 55.1

RLDP

- .rldp detect-interval
- .rldp detect-max
- .rldp enable
- rldp loop-detect enable

### 55.1.1 rldp loop-detect enable

RLDP

**rldp loop-detect enable**

**no rldp loop-detect enable**


┌

┌

┌

RLDP

RLDP

┌  
Ruijie(config)# **rldp loop-detect enable**

<b>rldp port</b>		RLDP



### 55.1.3 rldp detect-max

RLDP

**rldp detect-max *num***

**no rldp detect-max**

--	--	--

|

|

|

RLDP

RLDP

|

Ruijie(config)# **rldp enable**

|

<b>rldp port</b>	RLDP

|

|

-	-

### 55.1.5 rldp loop-detect enable

RLDP

**rldp loop-detect enable**

**no rldp loop-detect enable**

|


|

|

|

RLDP

RLDP

|

Ruijie(config)# **rldp loop-detect enable**

RLDP

RLDP

┌──────────┐

┌──────────┐

┌──────────┐

**55.1.7 rldp re**

**rldp rese**

┌──────────┐

┌──────────┐

┌──────────┐

┌──────────┐

┌──────────┐



└──

└──

└──

	-	-

└──

	-	-

# 56 DLDP

## 56.1

DLDP

- [.dldp](#)
- [.dldp passive](#)
- [.clear dldp](#)

### 56.1.1 dldp

DLDP no IP DLDP

**dldp** *ip-address* [**next-hop** *ipv4-address*] [**interval** *tick* | **retry** *retry-num* | **resume** *resume-num*]

**no dldp** *ip-address*


<i>ip-address</i>	IP		
<i>ipv4-address</i>	IP		
<i>tick</i>	5	5~6000 1tick= 10ms	tick
<i>retry-num</i>	1~3600		
<i>resume-num</i>	DOWN	UP 1~200	DLDP

tick 100tick=1s retry-num 3 resume-num 3

DLDP

1 10.83.132.10 DLDP  
Ruijie#**config**

```
Ruijie(config)#interface vlan 1
Ruijie(config-if-VLAN 1)#ip address 10.83.132.1 255.255.255.0 //
vlan1 IP
Ruijie(config-if-VLAN 1)#dldp 10.83.132.10
2 10.83.131.10 DLDP
Ruijie#config
Ruijie(config)#interface vlan 1
Ruijie(config-if-VLAN 1)#ip address 10.83.132.1 255.255.255.0 //
vlan1 IP
Ruijie(config-if-VLAN 1)#dldp 10.83.131.10 next-hop 10.83.132.2 //
IP
3 10.83.132.10 DLDP
Ruijie#config
Ruijie(config)#interface vlan 1
Ruijie(config-if-VLAN 1)#no dldp 10.83.132.10
```

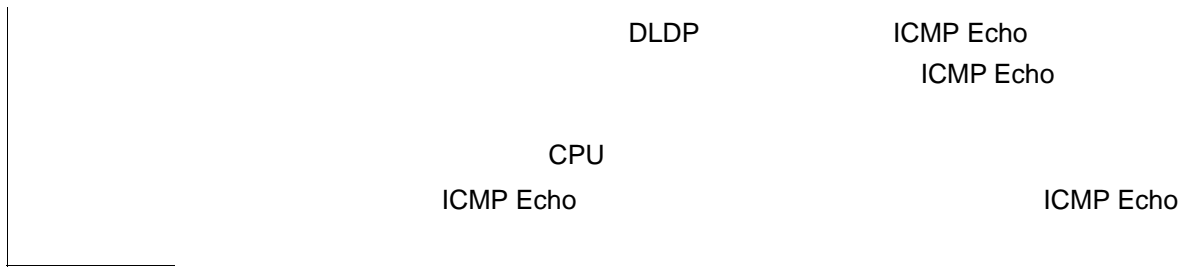

```

1      DLDP
Ruijie#config
Ruijie(config)#interface vlan 1
Ruijie(config-if-VLAN 1)#ip address 10.83.132.1 255.255.255.0 //
      vlan1 IP
Ruijie(config-if-VLAN 1)#dldp passive
    
```

-	-

10.3(5)

-	-

## 56.2

DLDP

- [show dldp](#)

### 56.2.1 show dldp

DLDP  
**show dldp [interface *interface-name*] [statistic]**

<i>interface-name</i>	

statistic

1

Ruijie#**show dldp**

10.3(5)

-	-

## 56.3

### 56.3.1 clear dldp

dldp up/down

**clear dldp** [interface *interface-name* [*ip-address*]]

<i>interface-name</i>	
<i>ip-address</i>	IP

DLDP up/down IP  
 up/down  
 IP up/down up/down

1 up/down  
 Ruijie#**clear dldp**  
 2 interface vlan 1 up/down  
 Ruijie#**clear dldp interface vlan 1**  
 3 interface vlan 1 10.83.132.1 up/down  
 Ruijie# **clear dldp interface vlan 1 10.83.132.1**

-	-

10.3(5)

	-	-

# 57 TPP

## 57.1

### 57.1.1 topology guard

```

                                topology guard
                                no
[no] topology guard

```

### cpu topology-limit

```

Ruijie(config)# topology guard
Ruijie(config)# no topology guard

```

**tp-guard port enable**

**cpu topology-limit CPU**

### 57.1.2 tp-guard port enable

xs6A.3A

[

CPU

( AP )

```
Ruijie(config-if)# tp-guard port enable  
Ruijie(config-if)# no tp-guard port enable
```

**topology guard**

## **57.2 TPP**

```
Ruijie# show tpp
```

```
topology guard
```

---

# 58

## 58.1

- cd
- cp
- ls
- makefs
- mkdir
- mv
- pwd
- rm
- rmdir

### 58.1.1 cd

`cd DIRECTORY`

*DIRECTORY*

“ ”  
..

“ ”  
.

**ls**

tmp

Ruijie# `cd tmp`

---

ls	

### 58.1.2 cp

**cp dest** {*DESTINE\_FILE* | *DIRECTORY*} **sour** *SOURCE\_FILE*  
**cp sour** *SOURCE\_FILE* **dest** {*DESTINE\_FILE* | *DIRECTORY*}

*DESTINE\_FILE*

*DIRECTORY*

*SOURCE\_FILE* ( )

---

r

**cp**

---

log.txt :

Ruijie# **cp sour** *log.txt* **dest** *../log\_bak.txt*

### 58.1.3 ls

---

**ls** *PATHNAME*

*PATHNAME*

Ruijie# **ls**

tmp

Ruijie# **ls** tmp

## 58.1.4 makefs

**makefs dev** *DEVNAME* **fs** *FSNAME*

**makefs fs** *FSNAME* **dev** *DEVNAME*

*DEVNAME* ( )

*FSNAME*

---

a

b

jffs2

dev/mtdblock/1

```
Ruijie# makefs dev /dev/mtdblock/1 fs jffs2
```

## 58.1.5 mkdir

```
mkdir DIRECTORY
```

```
DIRECTORY
```

```
( )
```

```
test
```

```
Ruijie# mkdir test
```

## 58.1.6 mv

---

```
mv sour SOURCE_FILE dest {DESTINE_FILE | DIRECTORY}
mv dest {DESTINE_FILE | DIRECTORY} sour SOURCE_FILE
```

SOURCE\_FILE

DESTINE\_FILE/DIRECTORY

```
          a          ( type file); b '?'
                    '?' '
,
          log.txt          ,          config.txt,
,
Ruijie# mv sour tmp/log.txt dest ../config.txt
          log.txt          tmp
Ruijie# mv dest /mnt/tmp sour tmp/log.txt
```

## 58.1.7 pwd

**pwd**

<b>pwd</b>	

---

Ruijie# **pwd**

## 58.1.8 rm

**rm** *FILE*

*FILE* ( )

,

log.txt

Ruijie# **rm** log.txt

<b>rmdir</b>	, rm ,

---

## 58.1.9 rmdir

---

# 59

## 59.1 CPU-LOG

- show cpu
- cpu-log

### 59.1.1 show cpu

show cpu CPU show cpu

5 CPU 5 1  
1 CPU 5 CPU 5

---

3	0%	0%	0%	atimer
4	0%	0%	0%	printk_task
5	0%	0%	0%	waitqueue_process
6	0%	0%	0%	tasklet_task
7	0%	0%	0%	kevents
8	0%	0%	0%	snmpd
9	0%	0%	0%	snmp_trapd
10	0%	0%	0%	mtdblock
11	0%	0%	0%	gc_task
12	0%	0%	0%	Context
13	0%	0%	0%	kswapd
14	0%	0%	0%	bdflush
15	0%	0%	0%	kupdate
16	0%	3%	1%	ll_mt
17	0%	0%	0%	ll main process
18	0%	0%	0%	bridge_relay
19	0%	0%	0%	dlx_task
20	0%	0%	0%	secu_policy_task
21	0%	0%	0%	dhcpa_task
22	0%	0%	0%	dhcpsnp_task
23	0%	0%	0%	igmp_snp
24	0%	0%	0%	mstp_event
25	0%	0%	0%	GVRP_EVENT
26	0%	0%	0%	rldp_task
27	0%	2%	1%	rerp_task
28	0%	0%	0%	reup_event_handler
29	0%	0%	0%	tpp_task
30	0%	0%	0%	ip6timer
31	0%	0%	0%	rtadvd
32	0%	0%	0%	tnet6
33	2%	0%	0%	tnet
34	0%	0%	0%	Tarptime
35	0%	0%	0%	gra_arp
36	0%	0%	0%	Ttcptimer
37	8%	1%	0%	ef_res
38	0%	0%	0%	ef_rcv_msg
39	0%	0%	0%	ef_inconsistent_daemon
40	0%	0%	0%	ip6_tunnel_rcv_pkt
41	0%	0%	0%	res6t
42	0%	0%	0%	tunrt6
43	0%	0%	0%	ef6_rcv_msg
44	0%	0%	0%	ef6_inconsistent_daemon
45	0%	0%	0%	imid
46	0%	0%	0%	nsmd
47	0%	0%	0%	ripd
48	0%	0%	0%	ripngd

---

---

49	0%	0%	0%	ospfd
50	0%	0%	0%	ospf6d



---

100%

90%

CPU

---

**show memory**

Ruijie#**show memory**  
System Memory Statistic:

32cd54192>

---

## 59.2.2 memory-lack exit-policy

worsen

---

**show memory protocols**




BGP,OSPF,RIP,LDP,PIM,ISIS

---

1 show memory protocols  
Ruijie(config)# **show memory protocols**  
=====

---

### 59.3.1.1 threshold set

MIB CPU CPU CPU 3 CPU  
CPU syslog  
syslog  
no

---

```

2 CPU
Ruijie(config)# threshold set cpu member 2 70 90

```

<b>show threshold</b>	

S3760

## 59.3.2

- [show threshold](#)

### 59.3.2.1 show threshold

**show threshold {cpu | memory | temperature} [M1 | M2 | slot *n* | member *n*]**

<b>cpu   memory   temperature</b>	<b>cpu CPU</b> <b>memory</b> <b>temperature</b>
<b>M1   M2   slot <i>n</i></b>	<i>n</i>
<b>member <i>n</i></b>	<i>n</i>

```

1 M1 CPU
Ruijie# show threshold cpu M1

```

2

---

Ruijie# **show threshold memory**

<b>threshold set</b>	

S3760

---

# 60

## 60.1

### 60.1.1 logging on

no

**logging on**

**no logging on**

RGOS

Console      VTY  
FLASH    Syslog Server

1    Log

Ruijie(config)# **no logging on**

<b>logging buffered</b>	
<b>logging</b>	Syslog Server
<b>logging file flash:</b>	FLASH
<b>logging console</b>	

---

<b>logging monitor</b>	) VTY ( telnet
<b>logging trap</b>	Syslog Server

### 60.1.2 terminal monitor

```

VTY
no

terminal monitor
terminal no monitor

VTY          VTY

VTY          VTY

VTY
RGOS
0 1          no

VTY
Ruijie# terminal monitor
Ruijie#

```

### 60.1.3 logging buffered

```

no

60.gjm3( fered )]?UCmo?#?#

```

---

*buffer-size* 4K 128K Bytes

*levell* 0 7

4k Bytes

7

**show logging**

logging

Ø

clear  
FLASH



---

```
Ruijie(config)# logging server ipv6 AAAA:BBBB::FFFF
```





---

**show logging**

6

Ruijie(config)# **logging console informational**

<b>logging on</b>	
<b>show logging</b>	

### 60.1.7 logging monitor

VTY telnet SSH  
no VTY

**logging monitor level**

**no logging monitor**

*level*

1

Debugging (7)

VTY  
VTY

**terminal monitor**  
**logging monitor**

**Logging monitor**

VTY

Ruijie(config)# **logging monitor informational**

<b>logging on</b>	
<b>show logging</b>	

### 60.1.8 logging trap

```

                Syslog Server
no                Syslog Server
logging trap level
no logging trap

level
                1

Informational(6)

Server                Syslog Server                logging        Syslog
show logging

                6                202.101.11.22        Syslog
Server
Ruijie(config)# logging 202.101.11.22
Ruijie(config)# logging trap informational
```

---

<b>logging on</b>	
<b>logging</b>	Syslog Server
<b>show logging</b>	

## 60.1.9 logging source interface

no

**logging source interface** *interface-type interface-number*

**no logging source interface**

*interface-type*

*interface-number*

Syslog Server

Loopback 0

Syslog

Ruijie(config)# **logging source interface loopback 0**

<b>logging</b>	Syslog Server

---

## 60.1.10 logging source ip| ipv6

no

**logging source** {ip *ip-address* | **ipv6** *ipv6-address*}

**no logging source** {ip | **ipv6**}

*ip-address*

IPV4

IPV4

*ipv6-address*

IPV6

IPV6

Syslog Server

Loopback 0

Syslog

Ruijie(config)# **logging source ip** 192.168.1.1

<b>logging</b>	Syslog server

## 60.1.11 logging facility

no

(23)

**logging facility** *facility-type*

**no logging facility**

---

*facility-type* Syslog

Local7(23)

2 Syslog

2

<b>Numerical Code</b>	<b>Facility</b>
0	kernel messages
1	user-level messages
2	mail system
3	system daemons
4	security/authorization messages
5	messages generated internally by syslogd
6	line printer subsystem
7	network news subsystem
8	UUCP subsystem
9	clock daemon
10	security/authorization messages
11	FTP daemon

---

12	NTP subsystem
13	log audit
14	log alert
15	clock daemon
16	local use 0 (local0)
17	local use 1 (local1)
18	local use 2 (local2)
19	local use 3 (local3)
20	local use 4 (local4)
21	local use 5 (local5)
22	local use 6 (local6)
23	local use 7 (local7)

RGOS (local7) 23

Syslog kernel

Ruijie(config)# logging facility kern

logging console	

## 60.1.12 logging count

no

logging count

---

**no logging count**

**no logging count**

Ruijie(config)# **logging count**

<b>show logging count</b>	
<b>show logging</b>	

### 60.1.13 logging rate-limit

no

**logging rate-limit** {*number* | *all number* | *console* {*number* | *all number*}} [*except severity*]

**no logging rate-limit**

*number*

---

*except*

error

error(3)

*severity*

0—7;

debug

10

warning



```
Ruijie(config)# service sequence-numbers
```

logging on	
service timestamps	

## 60.1.16 service timestamps

no

default

**service timestamps** *message-type* [*uptime* | *datetime* [*msec* | *year*]]

**no service timestamps** *message-type*

**default service timestamps** *message-type*

```

message-type          log  debug log          0
   6                  debug          7
uptime                * * * * *      07:00:10:41
datetime              Jul 27 16:53:07
msec                  : : .      Jul 27
16:53:07.299
year                  : :      2007 Jul 27
16:53:07

```

RTC

---

Uptime  
Datetime

Log            Debug                            Datetime

```
Ruijie(config)# service timestamps debug datetime msec
Ruijie(config)# service timestamps log datetime msec
Ruijie(config)# end
Ruijie(config)# Oct        8    23:04:58.301    %SYS-5-CONFIG_I:
Configured from console by console
```

---

```
Mar 22 15:28:02 %SYS-5-CONFIG: Configured from console by
console
Ruijie# config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Ruijie(config)# service sysname
Ruijie(config)# end
Ruijie#
Mar 22 15:35:57 S3250 %SYS-5-CONFIG: Configured from console
by console
```

<b>show logging</b>	

## 60.1.18 more flash

FLASH

**more flash:filename**

*Filename*

---

<b>logging file flash:</b>	FLASH

### 60.1.19 clear logging

**clear logging**

Ruijie# **clear logging**

<b>logging on</b>	
<b>show logging</b>	
<b>logging buffered</b>	

## 60.2

---

Console logging	
Monitor logging	VTY
Buffer logging	
Timestamp debug messages	Debug
Timestamp log messages	Log
Sequence log messages	
Trap logging	Syslog Server
Log Buffer	

<b>logging on</b>	

---

clear logging	
---------------	--

## 60.2.2 show logging count

show logging count

logging count

show logging count

show logging

show logging count

```
Ruijie# show logging count
Module Name  Message Name Sev Occur      Last Time
=====SYS
CONFIG_I     5  1          Jul 6 10:29:57
-----SYS
TOTAL                               1
```

logging count	
show logging	
clear logging	

## 60.2.3 show logging reverse

---

**show logging**

---
