copyright ©



✓	/(~be7ê
+Ñ	/(~be7ê B*D>

2. ý

ÊBÊ[illegible]

Ñ ð

1 cp

RG-S2910-10GT2SFP-P-E

RG-S2910-10GT2SFP-P-E QoS=

„ RG-S2910-10GT2SFP-P-E Ô

×	10/100/1000Base-T	SFP+	1000Base-X	Console	USB	+
	8F2	1	SFP			
RG-S2910-10GT2SFP-P-E	10 (1-8 1 POE)	\	2	1	\	\

SFP 1% e7 1000base-X

1000Base-T GA 100Base-TX Â 10Base-T

POE 1%e7 POE+/POE

a A F>%73PFVF4 >

a A

RG-

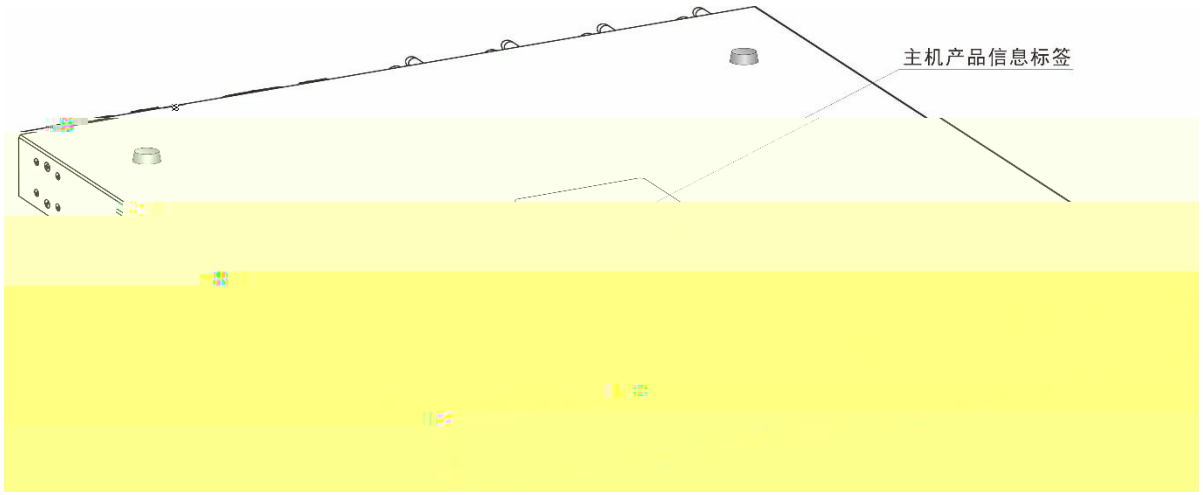

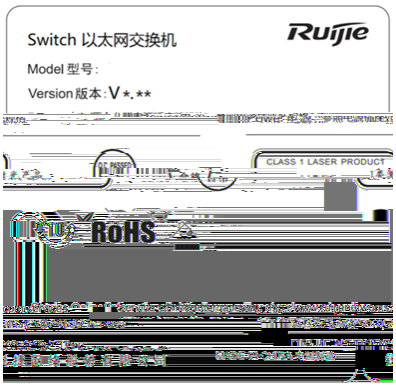

C

RG-S2910-10GT2SFP-P-E 10 Z 10/100/1000Base-T 2 Z SFP 1 Z Console

. 1-1RG-S2910-10GT2SFP-P-E

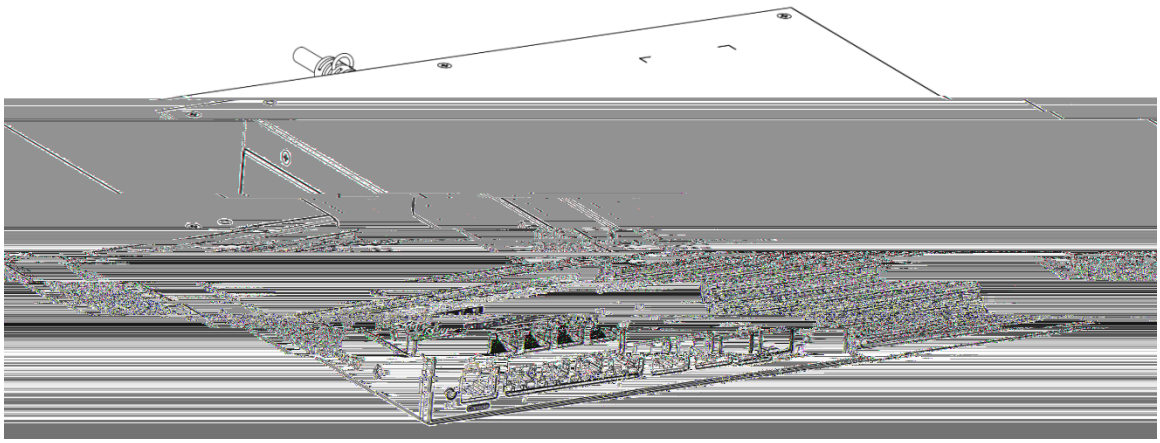

Â

. 1-2 RG-S2910-10GT2SFP-P-E)M7j?



GÏ	1Ê e7/jÿ	7Ê POE 9JÞ
	2Ê POE (e7/jÿ	8Ê Console
	3Ê 10/100/1000Base-T 8F2Ä Z5 1	9Ê 10/100/1000Base-T 8F2Ä5 1
	4Ê +e (e7/jÿ	10Ê 1000Base-X SFP 1
	5Ê +e (e7/jÿ	11Ê Reset 9JÞ
	6Ê y (e7/jÿ	

a FPEýPoE 3ä %F>,1%(7¥/pÕ3=1% POE Ñk=/p=1%FU)½/pa M6K 2 0@,L*¸ A=FÕ

dÂ

. 1-3RG-S2910-10GT2SFP-P-E >M7j?



GÏ	1Ê Õ	
	2Ê „	

Ô

RG-S2910-10GT2SFP-P-E Ô e+XÊÕ Ä

Ä

Ô ACÊÕ

„ NÊe93Ö 100-240V~

„ 0W+e93Ö 90-264V~

„ NÝÖ 50/60Hz

„ NÊeq 2A

„ +eÀÏÖ 10A +eÀï

Q»ä HVDCÅÕ

„ EÃe93Ö 192-290VDC

„ EÃe83Ö 1.0-0.4A

bCãå

RG-S2910-10GT2SFP-P-E G+X8f ² È LÀ77-XÊÏÄn5ÿ1ÃXj1ã×
úM+Cã 10cm ,0ÈÏÐ,ÊJÄ Ô LÏ Ä *AÞ 3 Z8 0Q Å È F& H eÿ5(Ä

. 1-4 FJNÿ

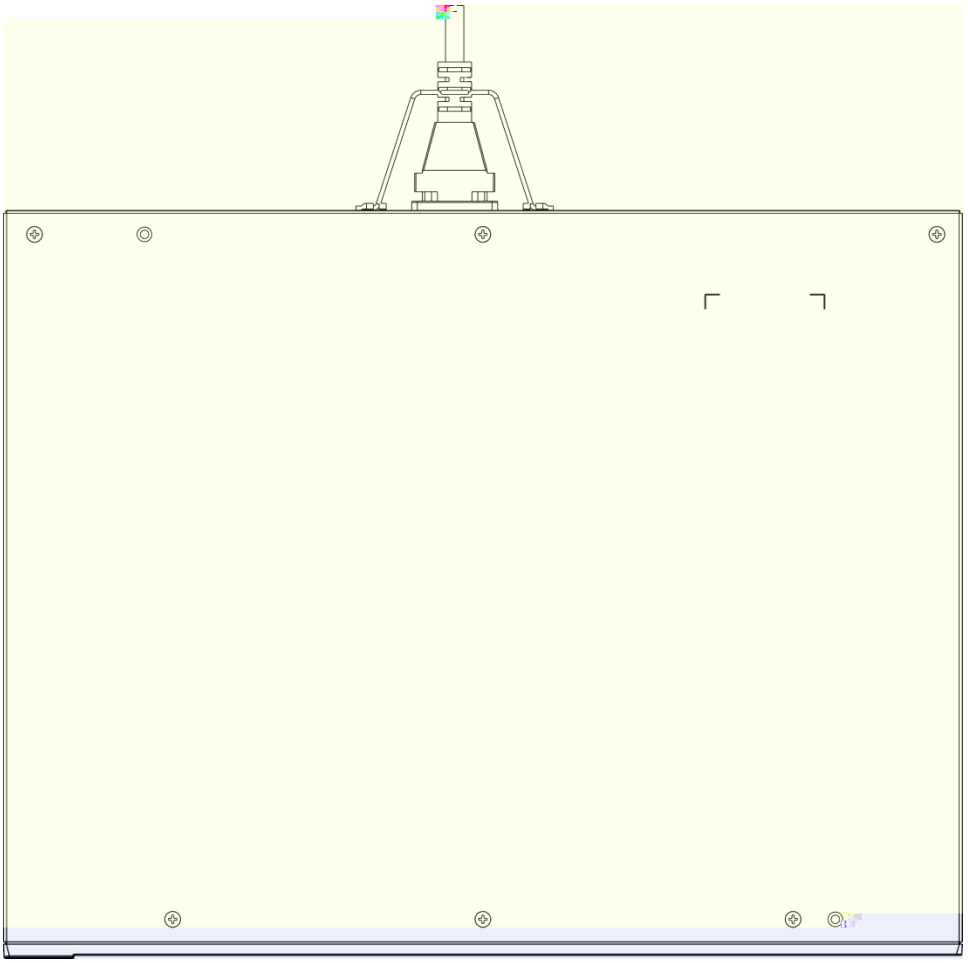

Ce

(1e7/jÿ&	Status	7/jÿ&	ÕÎt+e
		5/8Lã&	ÔXMFÈ0-Lã&7j2h
		5/8hÞ	ÔÎÔ
		T8hÞ	ÔÏÖ2AÈÔÏ
		4ÈhÞ	ÔLÌ
PoE 7/jÿ&	PoE	5/8hÞ	17/jÿ&/jÔ1e
		T8hÞ	17/jÿ&/j PoE Ëe(1e
1000Mbps RJ-45 Õ/jÿ&	1-10	7/jÿ&	1Z Link
		5/8hÞ	1 1000M Link Up
		5/8Lã&	1 1000M ŕ
		TÿÞ	1 100/10M Link Up
		Tÿÿ&	

2 G[illegible]

2.1 [illegible]

p[illegible]FVFZ[illegible]	RG-S2910-10GT2SFP-P-E [illegible]	4[illegible]1b	B*D [illegible]
A,º [illegible]730)[illegible]	>		

2.1.1 G[illegible]

- 1j1[illegible]
- =[illegible]nX>[illegible]
- [illegible] F[illegible]
- A[illegible]p9+e[illegible]e56[illegible]

2.1.2 [illegible]

- [illegible]
- 0+[illegible]
- 0+[illegible]p9+e[illegible]e56[illegible]

2.1.3 [illegible]

- F>|+eD[illegible]
- XA[illegible]
- X A[illegible]WU+eL([illegible]
- mG[illegible]
- M0[illegible]
- B[illegible]nX[illegible]

Ø¾E+kCÞ +k#wÊ? 15mA¸+k#wrEô 15mA A,¿ÎÊÒÜIB%¸ÞVF

2.2.1 ù ÕãÌ

RG-S2910-10GT2SFP-P-E ÔÕ ÄX j1ã× úM¯ +Ÿã 10cm

RG-

2.2.6 Ty

[illegible] RG-S2910-H kj+e[illegible]+XFÕbM[illegible]

FM'+LÄbM[illegible]+X[illegible]+e[illegible]e456F[illegible]pLbM[illegible]pLbM[illegible]ga7-X0[illegible];

[illegible]bQ[illegible]M'+e,´+e[illegible]a2+e456-[illegible]JE[illegible]

LhM-[illegible]LpÅÑm%o[illegible] ;º [illegible]M68 >F[illegible]c>

3 C

B-L,B11b1,Ý >B-.A(54ü,B1Âb1,º ï»

.A1Ub1vF& ?(5%Cé

3.1 G

6J3+G× ñ2ò

FÕ+5Õ



3.2 G ø \

XB:A



„ >ÃÕ7,)ÑEP Ä

„ >ÃÕ7,)ÑEÑÄ

„ >ÃV35ž-e%Cã+eÄ

„ >ÃV35ž(55G)4Ä

3.3 G RG-S2910-10GT2SFP-P-E

I6•

ÑP

„ ÃX)Ñ8(+eÃFÕÃ

„ .ž+eÃe4¡ÕA7,´+eÕ@8Ä7X:+eÀ>Ã+eÀ¨+X+eÀLb7aiÔ

„ U/¥ RG-S2910-10GT2SFP-P-E A7:é5ž(Ä™

„ XA79Ca,FJNpLÄ 10

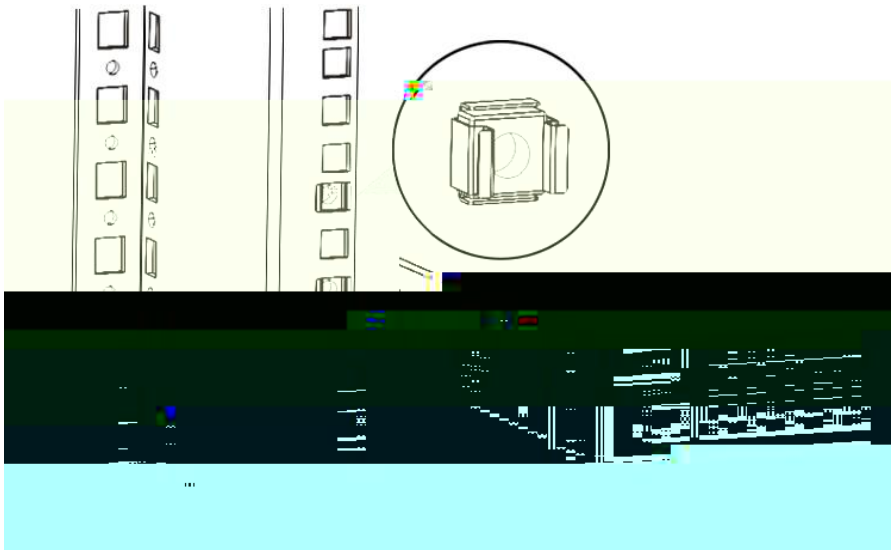

. 3-3 j26c>ñ.9

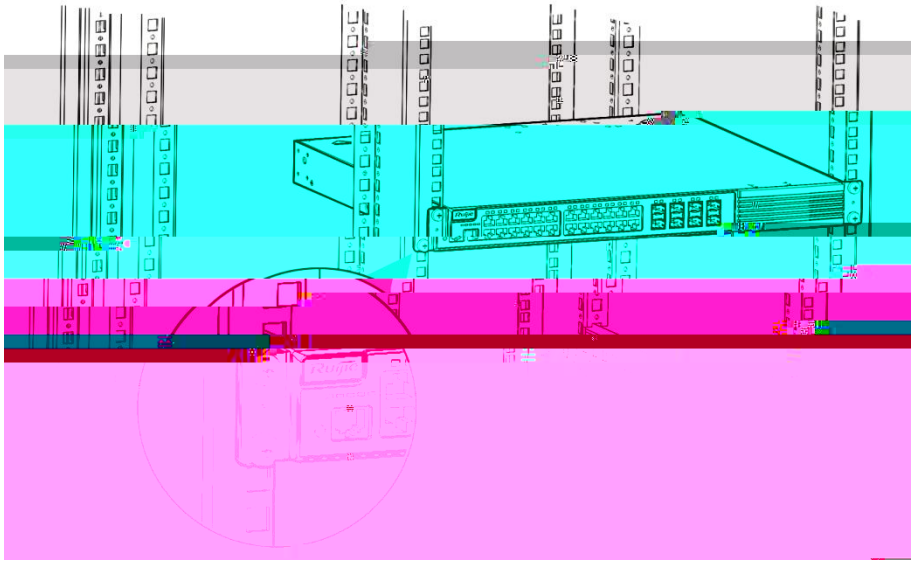

3.3.2 0©ãe

[illegible] 19 9(7[illegible]+X,[illegible]6[illegible]5[illegible]E

E1[illegible]

1\0Ö 65>[illegible] 4 ZTW7[illegible]dX[illegible]M,@)[illegible] 3-6 p/jÄ

. 3-4 M>ñ.0

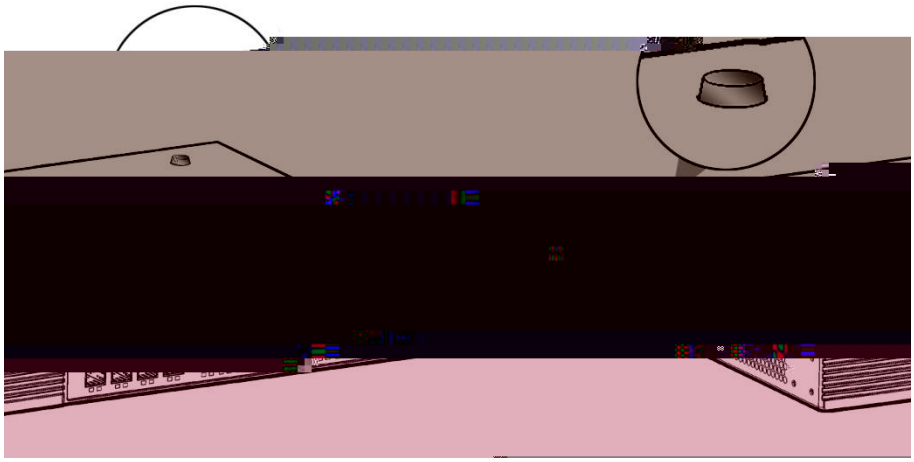

1\6ÿÔXM:ÈÇ$D7-O8ÿÜNÈ 3-7 p/jÄ

. 3-5 M?ÿ?¼

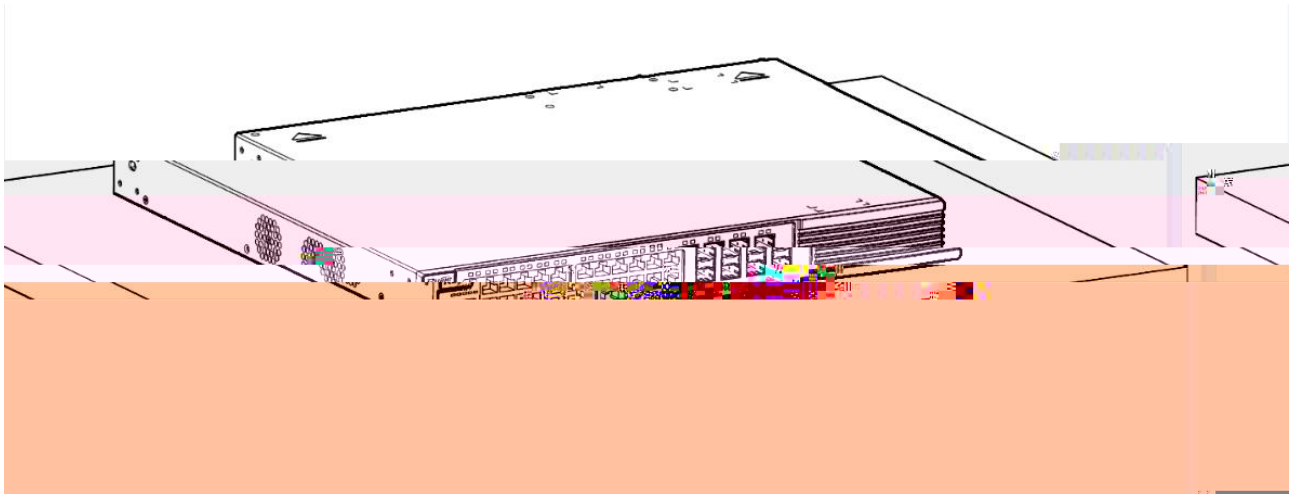

a AôÑ≥F>Ìl01ÿ 5¤

3.4 GÓ

a ÿêÑ!ÿ-6ÐL#kÿÔB%FVF8Ó,>

„ 4VFÕ

„ 6ÿ≥e56ÃeÃ56VFÕ

„ ÿ54V9XÊC4Ä9ÊC4ÿÊVF>ÿeÃbMÃLbM1yFÕ

„ Ä79Cõ,´ “ 0ÿÄ 10 ÈÅ


在您做任何电话或调制解调器连接之前，Windows 需要知道关于您当前位置的信息。
目前所在的国家(地区)(W):
中华人民共和国
确定
取消

2) . 4-3

. 4-3


新建连接
ruijie
图标(I):
确定
取消

3) . 4-4

. 4-4

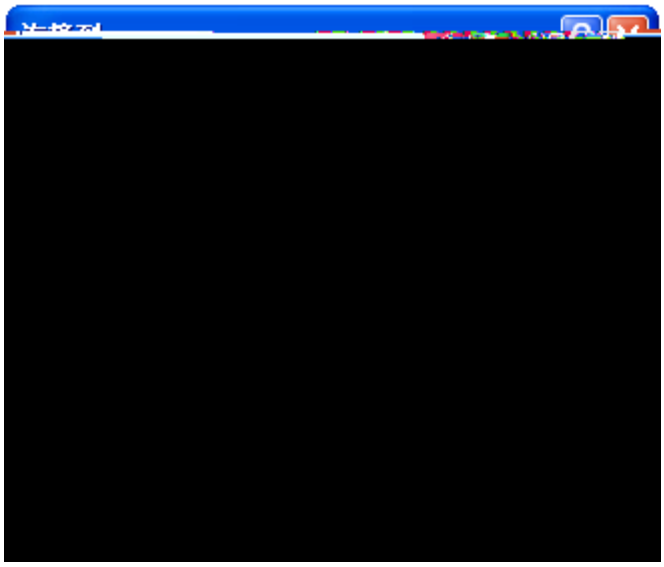

4) bF9¾È. <.È >9JÈ+5i*² . 4-5 p/j,FÕA5ž|MÈ5ž©)j 9600È
8wQPjÈ 1ÈfjÄ

. 4-5



5) bA5ž©>È. <.È >9JÈ+5F² . 4-6 p/j,Cµ4×4ÈÏ+MÄ

. 4-6

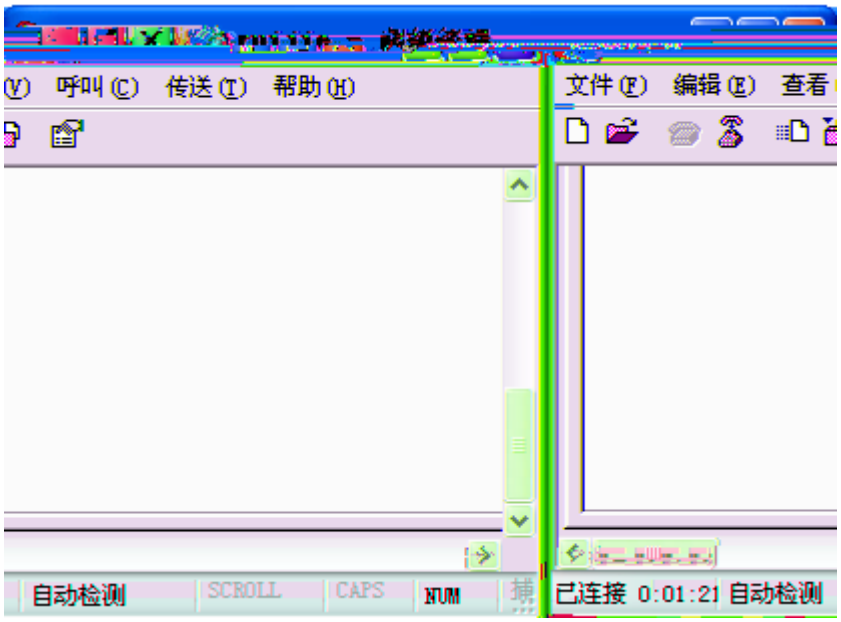

4.2 [illegible]

[illegible]

„ [illegible]

„ [illegible]

„ [illegible]

„ PC [illegible] console [illegible]

8[illegible]

[illegible]

„ [illegible]

„ [illegible]

„ [illegible]

„ [illegible]

„ [illegible]

5 Gá[illegible]

5.1 G[illegible]

5.2 n[illegible]

[illegible]	[illegible]	[illegible]
A[illegible]	[illegible]	B[illegible]163[illegible]

RJ45 1 #FJF65 fW*K	F5ü4ïLÌ× 4T56Ö¤ 100 2ø 19(©! GÿÈÂÔÑ ,ÓQÄ	5ü4ï× ïGÿÈ>ÂÔ9<Œ QÄ
y4ÊFJ	ÕF11FÕ3× Ây Q2×iG} y4Ô×1V8Ê× y4Ôµy Q7/j,ÁÕ	B3y4ÔF1Õ1× ÿ<ÿ/2ý Q¤ ÿ1V8Ê,ý4Ô i+XÕV8Ê,ý4Ô

\¢ A ² ÏÞ

1000BASE-T/100BASE-TX/10BASE-T D

1000BASE-T/100BASE-TX/10BASE-T 19/ÿFO)8F2,ÄÌÈXF9/ÿFO);8Ø MDI/MDIX Crossover ,7-Ä

1000BASE-T 1V8 IEEE 802.3ab 7ÈÕ456M01+X 100-ohm 5 2F<Cµ 5 2Mÿ5 54ï UTP F,m5 54ï STPÈ ØÈX,m5 54ï STPÈ0K 100 2ÿFÕ/Ä

1000BASE-T 1+X 4)4F>ÿPEÃ08p9,´ 4

\¢ B ² Mini-GBICo SFP ÿ

[illegible] SFP QÄ Mini-GBIC QÅXgiŽu¯X,Ê
8*6,F9-(ÄQÄv SFP QL¶;QFÈ1y+eEsv SFP Q‡ ü Mini-GBIC-GTÄ
Ë6sv SFP

\¢ C ² [illegible]

[illegible]

[illegible]

. C-1 +e[illegible]

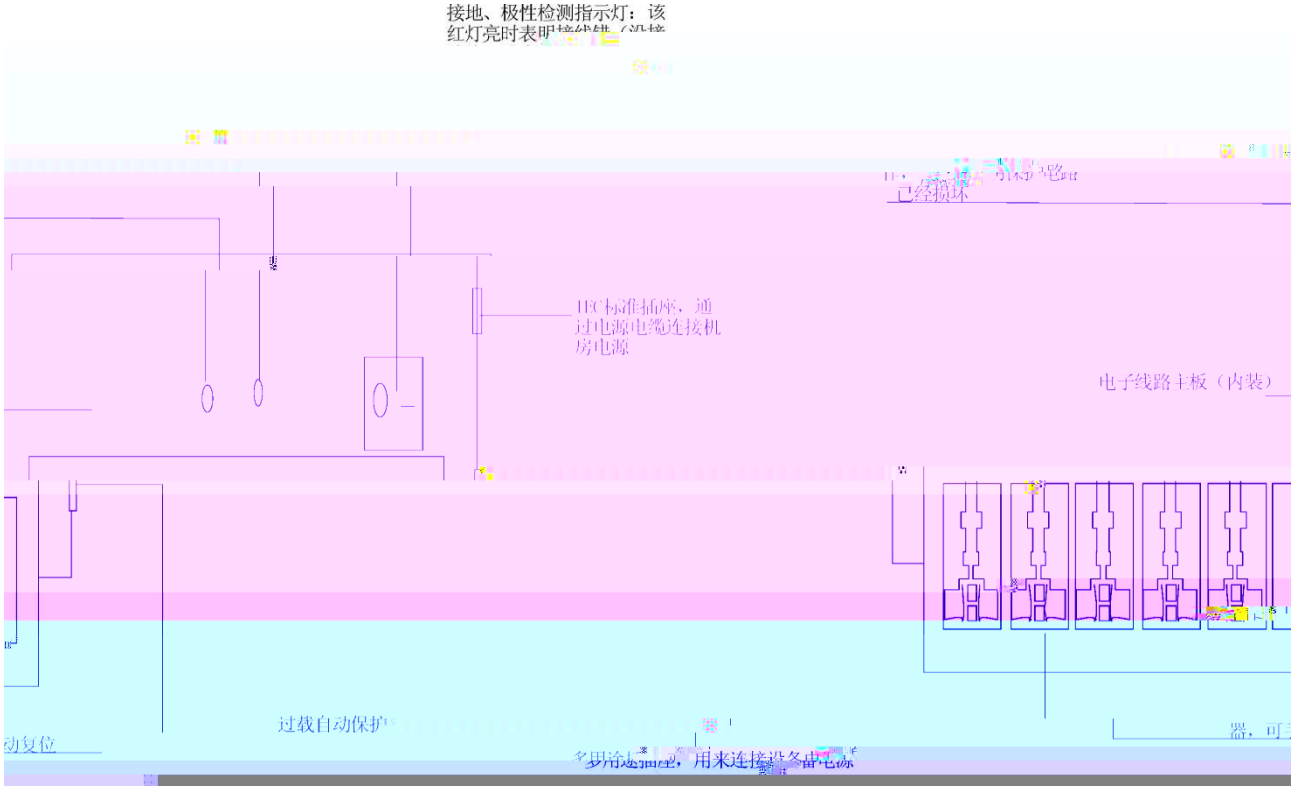

+k[illegible]	[illegible]

Ĺu>ǒ [illegible]

„ +e[illegible] PE 1[illegible]

„ 6[illegible]

„)+e[illegible]

[illegible]

PE 1[illegible]

Ly[illegible]

[illegible]

+ 6[illegible]

M0[illegible] Ö [illegible] Ã 7+X>[illegible]

[illegible]

1) [illegible]

2) [illegible]

3) +X7+X>[illegible]

4) [illegible] IN 1[illegible]

[illegible] OUT 1 [illegible]

5) +XlU[illegible]

. C-2 [illegible]

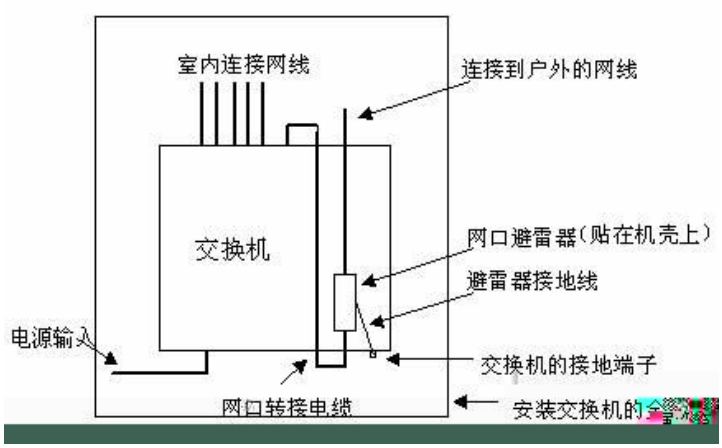

[illegible] 10/100M +k[illegible] RJ-45 F[illegible]

[illegible]

[illegible]

„ [illegible]

„ [illegible]

„ [illegible]

\¢ D ² G

f RG-S2910-10GT2SFP-P-E Ô¾ 19 9(7jÈÕ56FJE€4ïe-¡,54ïÈ
o,ÎuÂC4F,C4ï9E¢e56ÕB*6nXj,ÔÄ7-nXjFGE>ÎÂ
+eÀjE€4ÈoÎuÂ¾}+eÕÃbM1ay,5ÅF:C4F,C4Ä

Ôe-

„ +eÀ2ÃJ+e562Ãe5623n*ÊÈÄ+e56F´ 5 =:×)4ÿÈ2«
+e56Ã+e56F´ 7 =:Ä

„ ÈJ<E+e5623n*ÊÈÄ+e56F´ 7 =:×)4ÿÈ F2«e56Ã+e56F´ 10
=:Ä

„ QFO+e56Ä SFP++e561yÅÄ+e56F´ 5 =:Ä4ÿÈ2«e56Ã+e56F´ 10
=:Ä

Ôe-

„ y4ÔÈy4Ó$¾ 25 =y4ÔÄ

„ y4Ô+È¾ 20 =y4ÔÄ

„ y4Ôn È¾ 10 =y4ÔÄ

Ô¢•

„ Xv~4ÈM0¾1ÈdX4ÈF25ÄÄ

„ +e56Xjv~>ÃÃ~uÈ¢5P5Ãy)ÄÄ ² D-1 p/jÄ

. D-1 +e56v~/j2ÄÅ

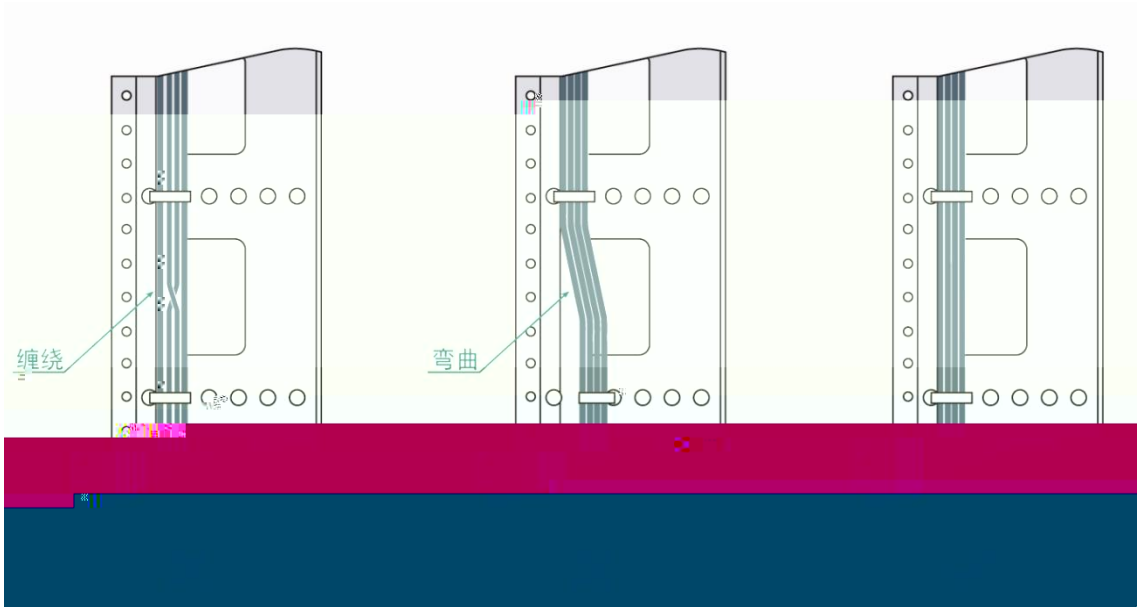

„ =<2¸+e56Ä-e4ÃÃ1yÅjÄ0C4Ã~ÈÇX0CÄ/E-F6÷
Ô4ÄC4ÈeÈe56>4¡LÞÄ?¼ 30mmÄ

„ jÈ,546ÄÏ-Ä%Ì,@Ä

„ +e560Cº ,HÄy%,ÃÇ-u6B6,>MÈ>055H>Äe

„ 5~+e56Ä9F2Ä4ÈÇXTiFTi:,4FÕ+X¾4Ä

„ +X46+e565~>ÃJ%G6Ä%UÈÇ%F7JÄ D-2 p/jÄ

. D-2 +e56v~/j3Å¼

„ X+e56M0Ä0 X+e56F>F>5~Ä=7-5~X'Ä+e56k +OEW,Ã
6<+e568ÄÝÄ D-3 p/jÄ

. D-3 +e56v~/j2ÄÅ

„)¾>Ĝ¡È M0±Ĝ}+e56È65+e56ŔĜ6ÄÈ6~XjF4ï-,F2ƒ5ÄÄ2ƒ
ƒ5ZXB3BÈ¡JA7F>È2JFP@A7•ÈJFP@~

„)Ez¿ó+e¾Ã1ÕLtF)+e56F>¦ÊbX1Õúe56:× +OÄ

„ B/+X8k=ê8W*Õ1Ä

„ <02Ã0ÄC4¡ÿ+e¾Ä~@+e56Ìe56µ+e56¾1Ã

„ 4¡5~9¿>F>¡Ä

+e56•¾Ä mmÅ	5~LÞÄ mmÅ
10	80~150
10~30	150~200
30	200~300

„ ++.e56C4F65v~=¢¿Ä

„)¾Ã2¿Õ1< ÄD01£yÅ6¾¢HŽ6=¾MbX1< FMÄ

RG