

RG-IS2700G

A solid red rectangular graphic element located to the left of the "Contents" text.

Contents



Ruijie#show tempr

Device-1:

Current Tempr: 21.0 C



	Status		
			5.2
RJ-45	1~8		Link
			Link up
SFP	9F 12F		Link
			Link Up












Contents

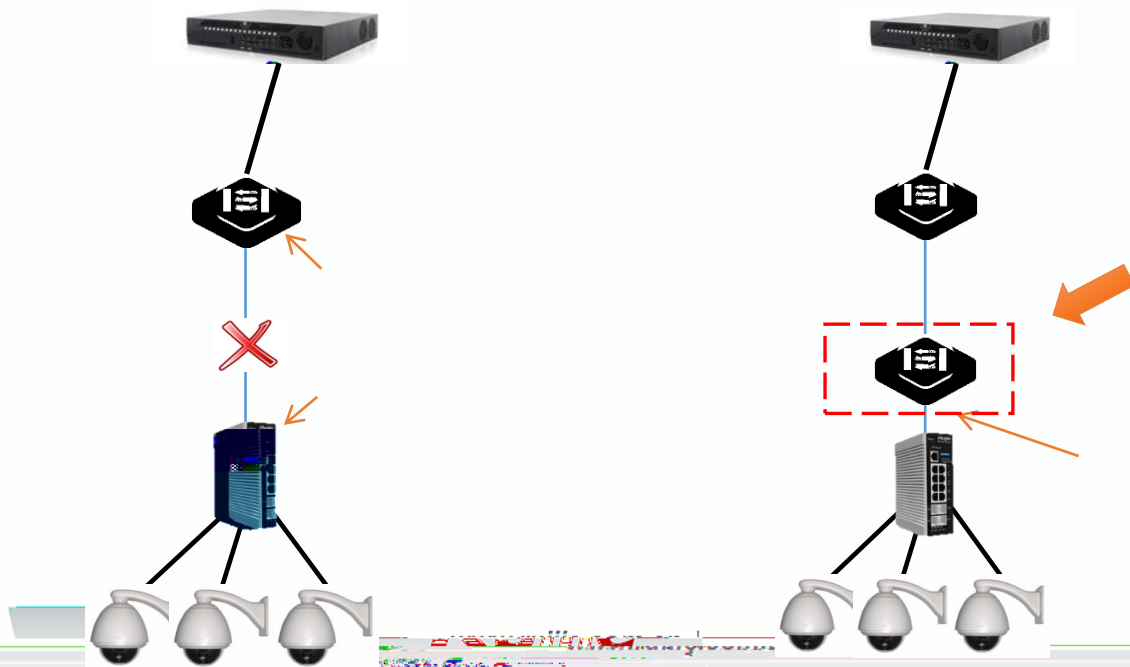









Smartweb

2 ERPS

ACL

SecureCRT



A solid red rectangular graphic element located to the left of the "Contents" text.

Contents

```
1
Ruijie# write

Building configuration...
Write to boot config file: [/config.text]

2
config.text
1
Ruijie# rename flash: config.text flash: config.bak //

2
Ruijie#delete config.text
Are you sure you want to delete "config.text"? [No/yes]y
File "config.text" is deleted.

3
Ruijie#reload
Proceed with reload? [no]y
Ruijie#
Ruijie#
System bootstrap ...
Nor Flash ID: 0x017E1000, SIZE: 8388608Bytes
Press Ctrl+C to enter Boot Menu .....
```

当前配置

配置备份

恢复出厂配置

说明： 恢复出厂配置，将删除当前所有配置。如果当前系统有有用的配置，可先导出当前配置

导出当前配置

恢复出厂配置

A solid red rectangle located to the left of the "Contents" text.

Contents

Boot Version: RGOS 10.4(2) Release(75955)
MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 134217728) detected
1 nand chip(s) found on the target.

Press Ctrl+C to enter Boot ...

// log 3s ctrl+c CTRL

Hot Commands:

Boot Loader >^C

Boot Loader >^C

Boot Loader >rename config.text config.bak

Boot Loader >load //

Ruijie#copy flash: config.bak flash: config.text

Ruijie#copy startup-config running-config

Ruijie# configure terminal

Ruijie(config)#enable secret level 15 0 ruijie //

Ruijie(config)#line vty 0 4

Ruijie(config-line)#password 0 ruijie

Ruijie(config-line)#login

Ruijie(config-line)#end

Ruijie#write

系统设置

系统重启

密码修改

系统日志

修改超级用户密码

提示： 如果您设置了新的Web登录密码，则在设置之后使用新密码重新登录。 密码只能包含英文、数字以及下

旧密码： *

新密码： *

确认新密码： *

保存修改

清 空

修改telnet登录密码

Telnet服务：☒ 已开启

新密码： *

确认新密码：

A solid red rectangular graphic element located to the left of the "Contents" text.

Contents

www.ruijie.com.cn

RGOS

Switch 共找到 1 条数据

所有新品: ☐

产品状态:

产品名称:

版本名称:

版本类型:

受控状态:

生命周期:


负责人:

Search


Reset

版本类型	受控状态	生命周期	备注	NO	发行时间	产品状态	产品名称	版本名称		
i2700系列	RGOS_10.4 (3h16)T2	Release169203	正式版本	受控	可用	首次发布，具备工业特性的交换机（适用于高、低温的环境）	2090	2013/11/22	样板局	RG-IS

WEB



设备正在重启，请勿做其他操作！

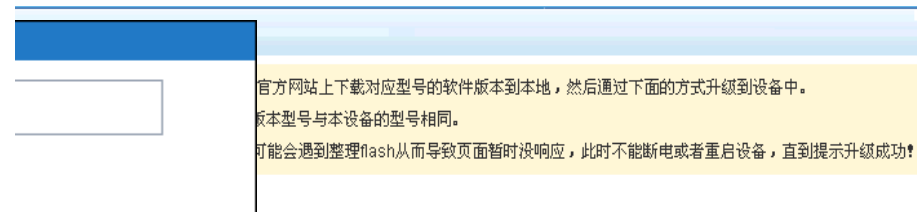

www.ruijie.com.cn